


OLI



GENERAL CATALOGUE

2025/2026

Inspired by water...

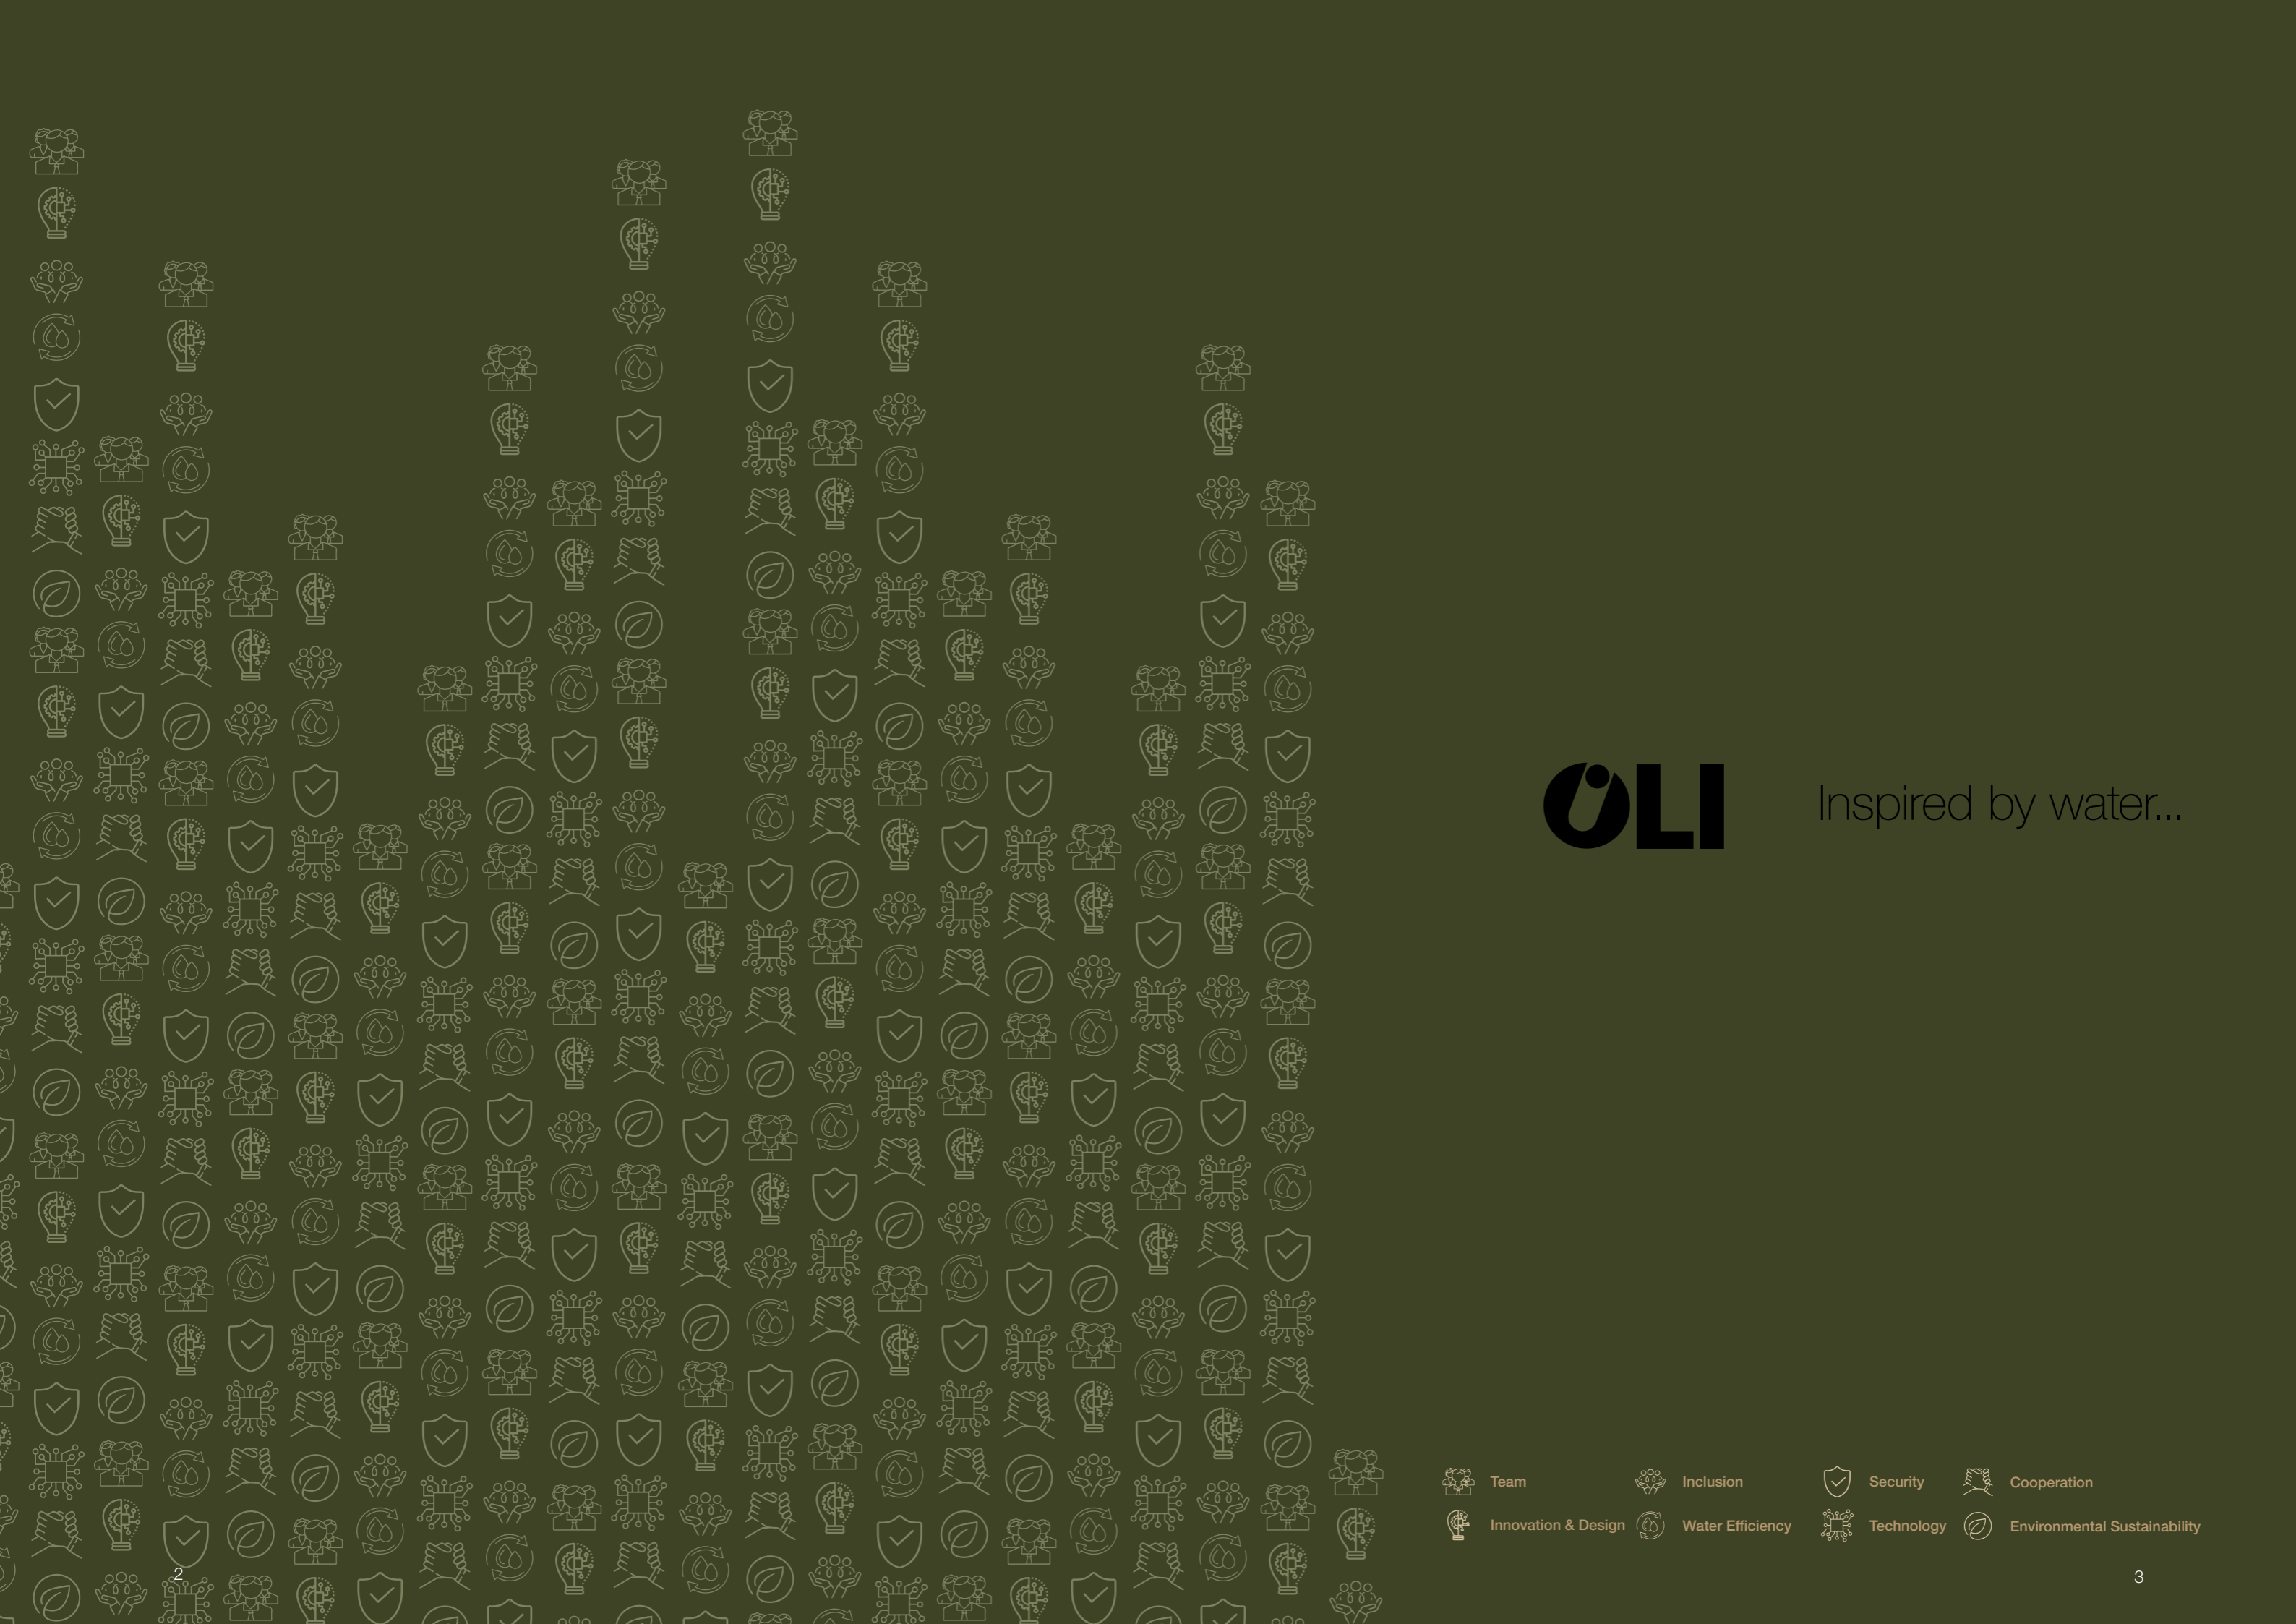

Inspired by water...

- Team
- Innovation & Design
- Inclusion
- Water Efficiency
- Security
- Technology
- Cooperation
- Environmental Sustainability

INDEX

COMPANY	06
IN-WALL CISTERNS	18
SPECIAL SOLUTIONS	80
FRAMES	96
FLUSH PLATES	114
EXPOSED FLUSH CISTERNS	160
MECHANISMS	174
SANITARY WARE	190
MIXERS & TAPS	220
SHOWER DRAINS SYSTEMS	230
TOWEL RADIATORS	252
OLI SERVICES	257




As part of OLI's vision of sustainability, this catalogue is printed on Recycled label. The forest-based material in this product is recycled. The FSC® label on this catalogue ensures responsible use of the world's forest resources.

COMPANY

Inspired by water for 70 years, OLI is now the largest producer of cisterns in Southern Europe and is present in bathrooms all over the world. Constantly growing and looking to the future, OLI already has 6 commercial & logistical subsidiaries to strengthen its position in the market.


Its aim is to develop aesthetically pleasing and functionally differentiating solutions that make the bathroom an efficient, sustainable, comfortable and safe place for everyone. With a focus on cisterns and all their components, such as flushing mechanisms, OLI also offers a growing range of products that combine innovation and design with sustainability and a constant concern for the rational and efficient use of water.

At OLI, innovation aimed at reducing water consumption in the bathroom is at the heart of its business strategy and also at its genesis. Committed to being an active agent in safeguarding the life of the planet, OLI strives every day to think of new and better solutions through functional, sustainable and differentiating offers.

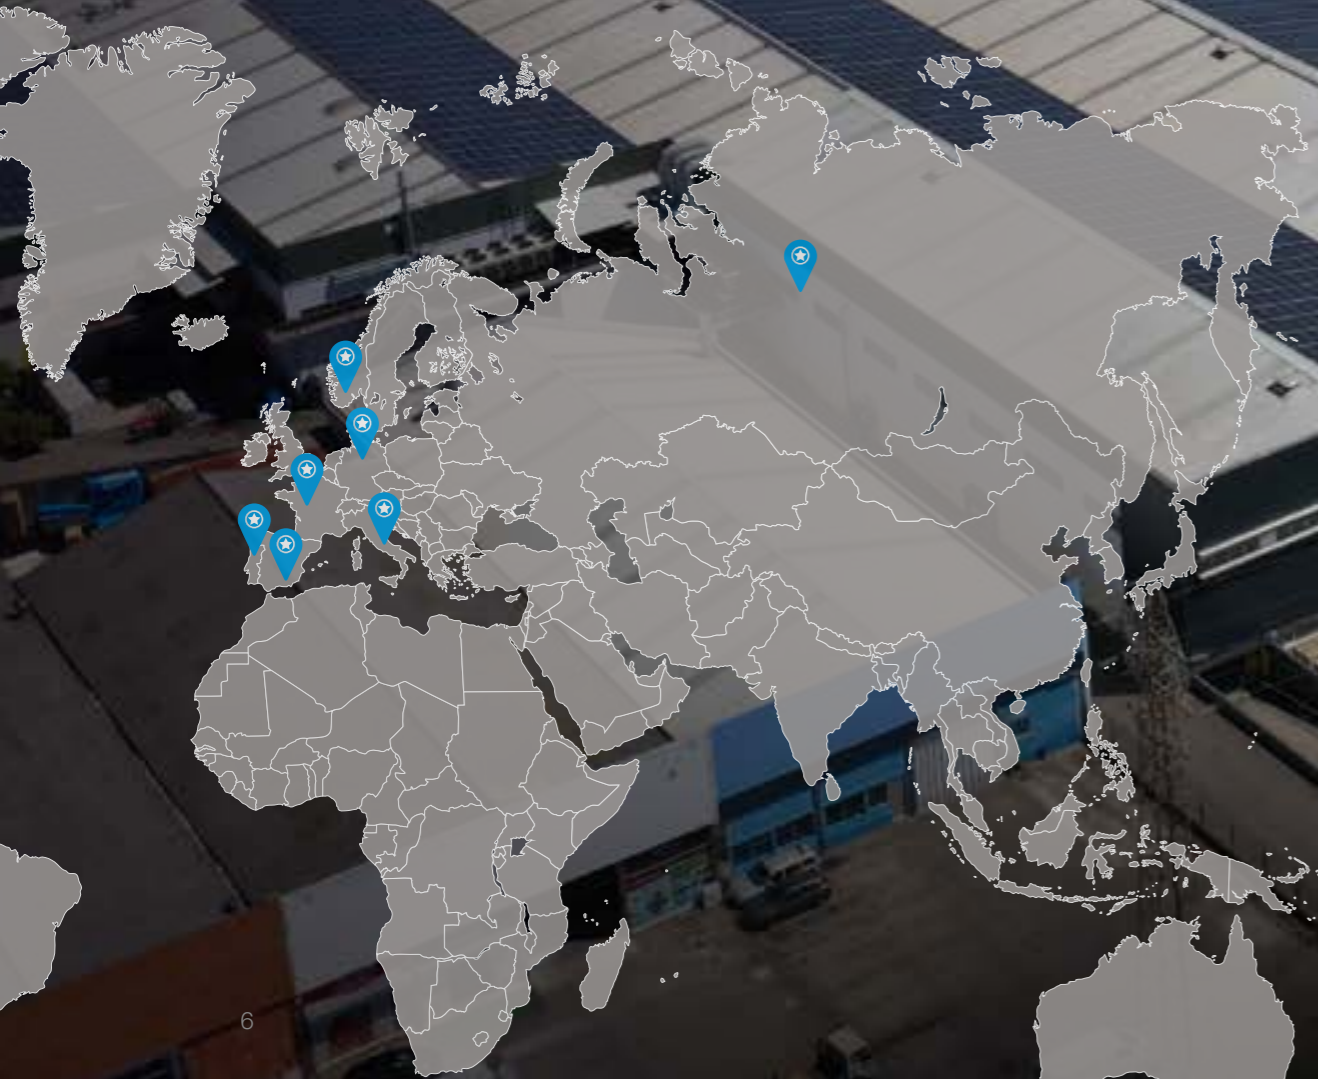



>450
Employees


3 Factories
Portugal + Italy
+ Russia


Subsidiaries
6

Production Volume
>2 M cisterns / year
>3 M flushing mechanisms / year
>150 M injected components / year


27
Patents

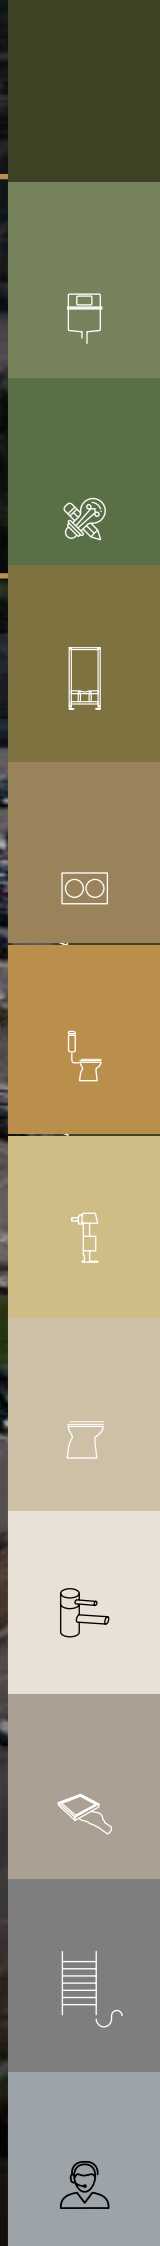

SUSTAINABILITY

WATER AND ENVIRONMENTAL SUSTAINABILITY



DUAL FLUSH

Combining an efficient valve and a flush plate with half-flush and full-flush options. In 1994, OLI was responsible for the mass introduction of dual flush cisterns, bringing huge environmental and economic benefits on a global scale.



PLUS SYSTEM

This is a system created by OLI where the inlet valve delays the inflow of water into the cistern to prevent extra water being used for flushing. While flushing takes place, no new water enters the cistern. This allows saving up to 9 litres of water per day, which corresponds to an approximately to a 12% reduction in the water bill.



4/2 L

The combination of a cistern set to flush 4 liters (full flush) and 2 liters (half flush) with an efficient toilet suitable for the purpose means immediate water savings.



CISTERN WITH 2 INLET VALVES

This flushing cistern is distinguished by having two water inlet valves. One for drinking water from the mains and another for non-potable water designed for rainwater, but applicable to other waters (boreholes or water wells) ensuring that only clear and filtered water is used. In this way it's possible to reuse rainwater for toilet flushing, saving drinking water that is essential for human consumption. It allows a more efficient use of the water resource and a saving in the water bill.

Water is more than an essential and vital resource; it is and will continue to be our inspiration for creating innovative and sustainable solutions. At OLI, we turn every drop into ideas that flow towards a more sustainable future.



FSC CERTIFICATION

Catalogs, brochures and cardboard packaging are already FSC certified.



INCREASE

the use of recycled raw materials.



NO MORE BLISTER PACKS

represents a saving of 11 tons of plastic per year.



GREEN ENERGY PRODUCTION

>3800 Photovoltaic panels

Throughout our history, we have contributed solutions that mark our essence and characterize us by the care we take of this precious commodity. We celebrate sustainability on several fronts through water-efficient solutions that bring nature into the heart of bathrooms through water and responsible attitudes.



TECHNOLOGY

In a competitive demanding market, innovation is a central priority. At OLI we reinforce efficiency and functionality by integrating technology into the bathroom.



Technology and water come together to transform the bathroom experience.



QUALITY

In our life time and standards testing laboratory, we test more than 200 products every year in different conditions (different actuations, waters, pressures). Before any product is launched on the market, OLI tests all its products to their limits, entrusting the market with a world class quality guarantee.

OLI
PERFORMANCE &
COMPLIANCE
LABS

Behind quality products are demanding processes that guarantee their excellence in any bathroom in the world. The multiplicity of markets in which we operate forces us to maintain a high level of excellence and this is a daily challenge that is at the heart of our work.

At OLI we have more than 75 products certified by different entities recognized worldwide.





The aim of OLIPRO is to enable any installer of the OLI products to have more technical knowledge about the specificities of installation and the scope of solutions for different types of needs.

Providing technical knowledge in order to guarantee the correct installation of the product to all those who deal with it improves efficiency and minimizes future occurrences in terms of technical assistance.

OLI therefore has some free services that may be useful for you.

PRE-INSTALLATION SUPPORT

The correct installation of products in the pre-installation phase of a construction project is crucial to ensure their durability and efficiency, contributing from the outset to the structural and functional integrity of the entire project.

Whether remotely, on site or at our OLI PRO training centre, our professionals will provide support that will contribute to the success of any project by establishing close contact with you.



Being close to our customers and the agents who handle our products is a successful strategy for OLI. Ensuring the correct installation of the product is fundamental to its success in any project.




INTEGRATED SOLUTIONS

OLI sees the bathroom as a space that combines water efficiency with design and is centred on functionality. We therefore present a complete range of products for demanding bathrooms projects.



BREEAM + LEED

Solutions that can contribute to the BREEAM + LEED rating of buildings

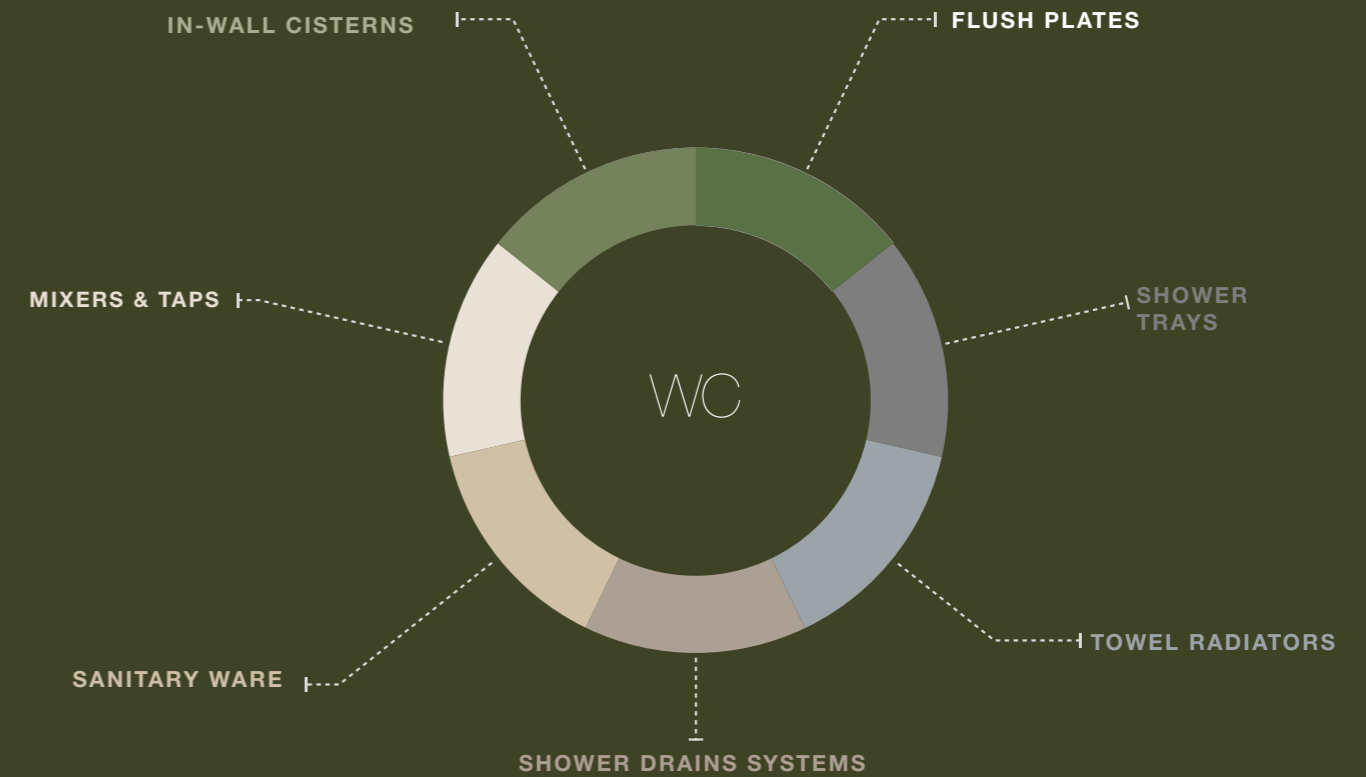

IN-WALL CISTERNS

OLI's wide range of in-wall cisterns guarantees efficient use of water and is prepared with models that adapt to different building realities.



FLUSH PLATES

With different shapes, finishes and actuations, OLI offers a complete and differentiated range of flush plates.



SANITARY WARE

A range that combines design and water performance. Equipped with Rim-off technology and quality glazing, the sanitary ware range has a refined design that adapts to any bathroom.



SHOWER DRAINS SYSTEMS

OLI offers a range of shower drains systems with different technologies that provide accessibility and comfort in the bathroom. Whether on the floor or in the wall, OLI's solutions ensure effective water drainage.



TOWEL RADIATORS

OLICLIMA towel radiators contribute to the comfort of your home, allowing the user to adjust the temperature and the operating time according to the needs of the user.




SHOWER TRAYS

OLI presents a range of shower trays in various sizes, colours, and antibacterial & anti-slip finishes, with a pure and minimalist style.



MIXERS & TAPS

The industrial design, simplicity of lines, and sensitive touch are all featured in OLI's range of taps.

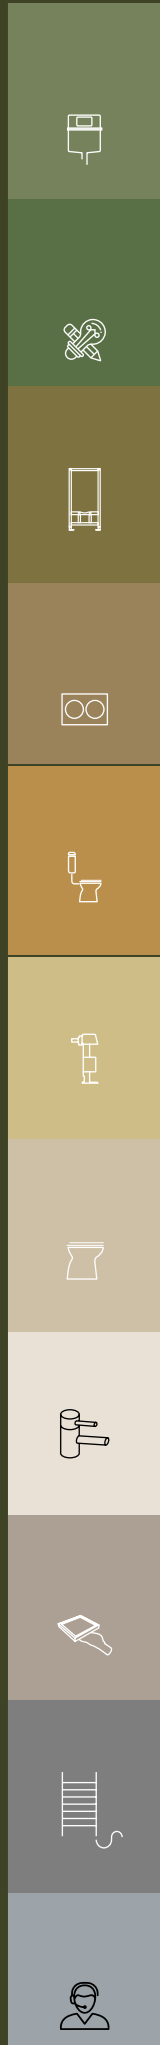




OLI70 PLUS	22
OLI120 PLUS	28
OLI74 PLUS	42
EXPERT PLUS	58
QUADRA PLUS	66
OLI80	72

- | | | | | | |
|--|----------------------------------|--|---------------------------------|--|----------------------|
| | Brick-wall, floor mounted toilet | | Saves up to 9l of water per day | | OLIpure System |
| | Brick-wall, wall-hung toilet | | Front or top actuation | | 80mm thick |
| | Drywall, wall-hung toilet | | SHT Shower Toilet | | 90mm thick |
| | Drywall, floor mounted toilet | | One man assembly | | 126mm thick |
| | 2 inlet valves | | Stop Fire | | 180mm thick |
| | Small spaces | | AC power-mains | | Supports up to 400kg |
| | Happy Air | | Public spaces | | Hydroboost System |

IN-WALL CISTERNS SYSTEMS

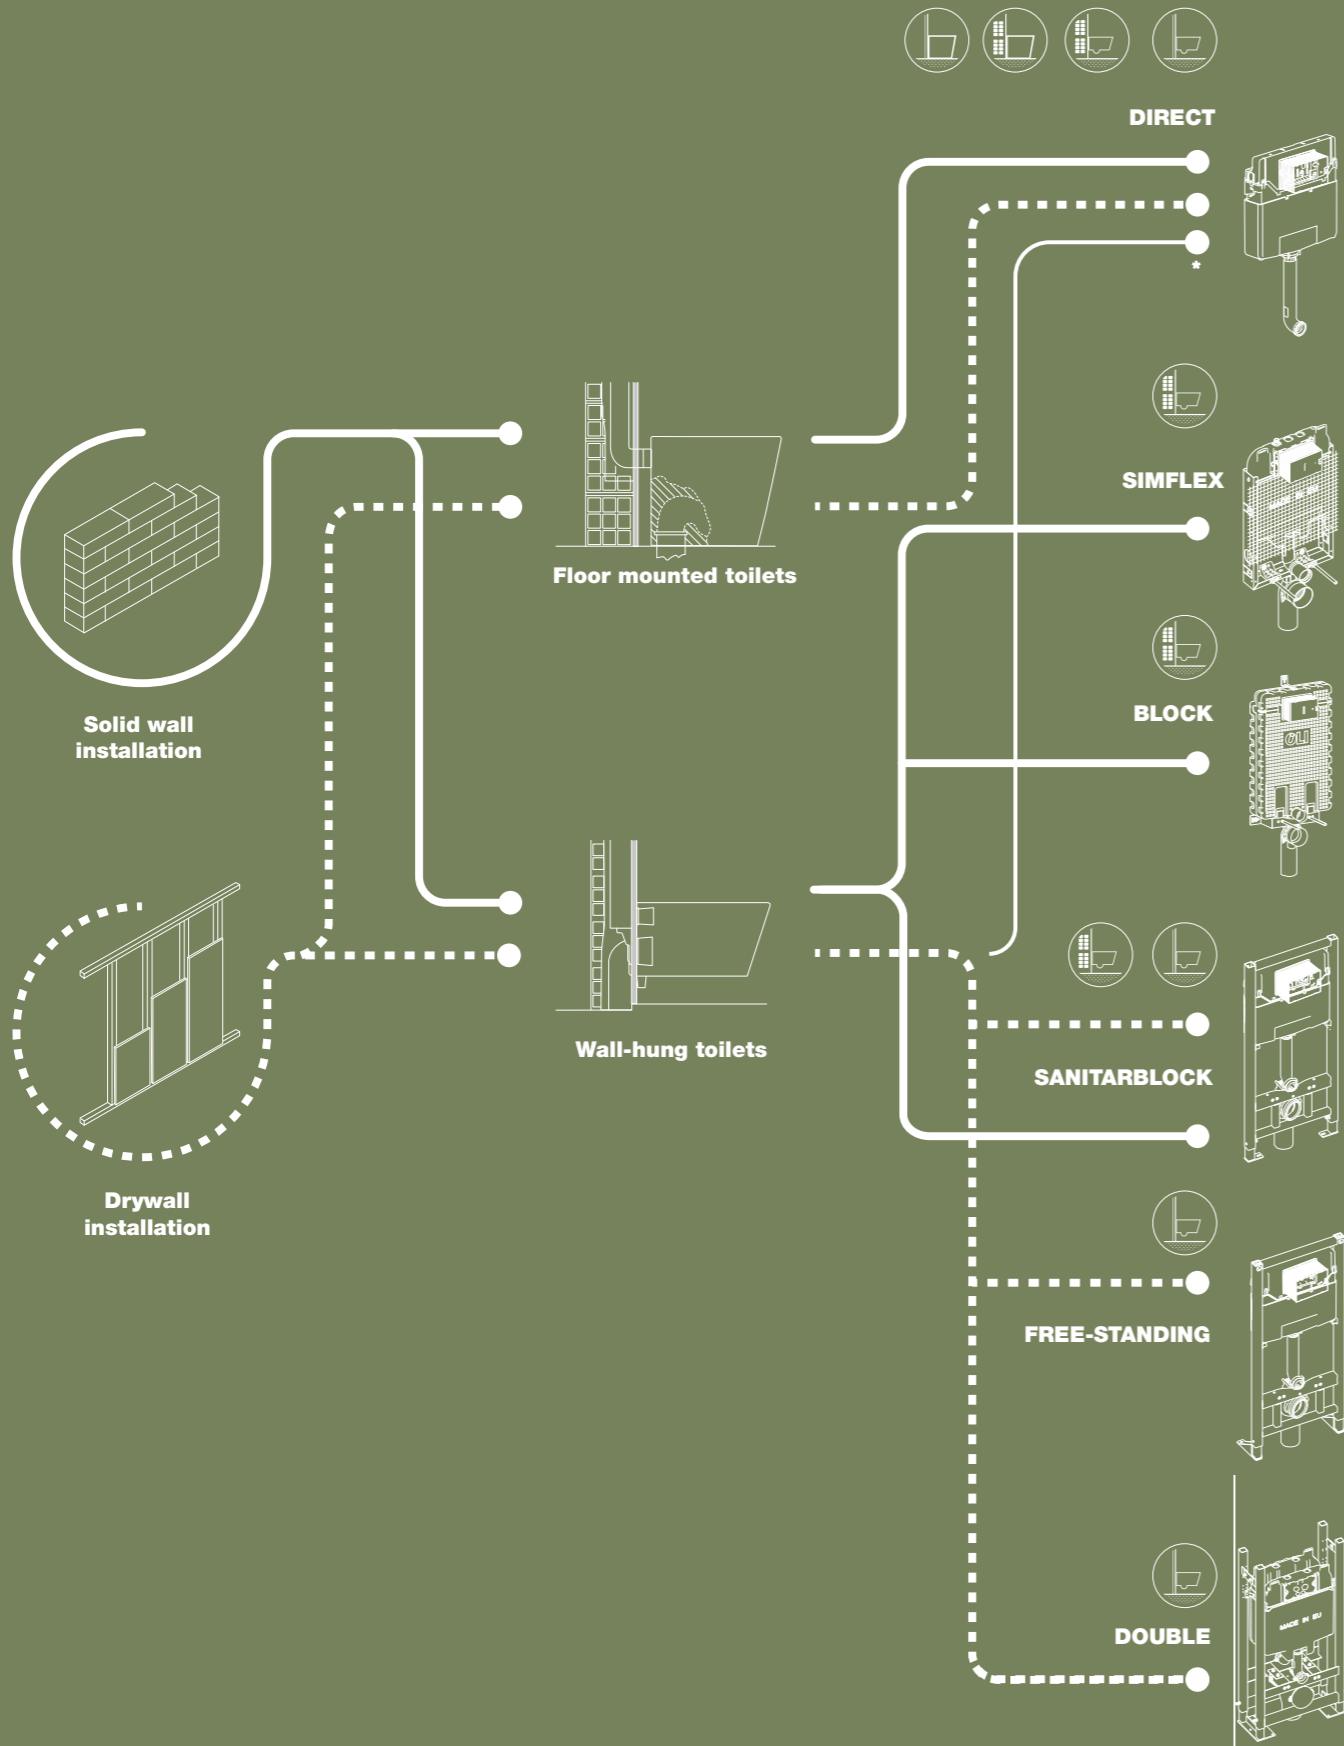

NEW

OLI70 PLUS OLI120 PLUS OLI74 PLUS OLI80 EXPERT PLUS QUADRA PLUS

90mm thickness	126mm thickness	80mm thickness	80mm thickness	150mm thickness	187mm thickness
90mm thickness		80mm thickness	80mm thickness	150mm thickness	
	144mm thickness				
90mm thickness	126mm thickness	90mm thickness	126mm thickness	150mm thickness	187mm thickness
	180mm thickness	180mm thickness		180mm thickness	
	240mm thickness	240mm thickness			

OLI70 PLUS



MINIMUM THICKNESS

A slimmer in wall cistern saves you space, just with 9cm deep—sleek and embraced. Modern design, efficiency at installation.

SHOWER TOILET


The OLI70 PLUS in-wall cistern includes pre-installation for a smart toilet and hand shower. The smart toilet and hand shower can be fitted either during the in-wall cistern installation or at a later stage.

MAINTENANCE

Protection plate with levers block for quick and easy maintenance. QR-code to access all technical information.



Compatibility
Wide range of flush plates

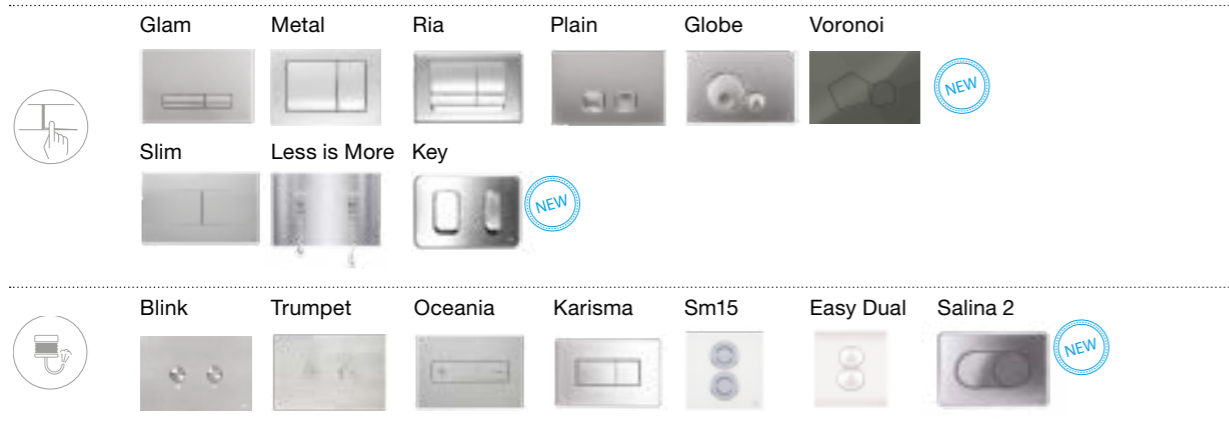

OLI70 PLUS NEW

MAINTENANCE
Protection plate with levers block for quick and easy maintenance.

PLUS
Saves up to 9l of water per day

Minimum thickness
90mm

SHOWER TOILET
Prepared for shower toilet installation

OUTLET BEND
Fine adjustment of the outlet bend

HEIGHT ADJUSTABLE
0 to 300mm

FLUSH PLATE
Wide range of flush plates and actuations: mechanical, pneumatic

FLUSH VOLUME
Dual flush: 6/3L. Adjustable to 4/2L or 4.5/3L.

INSTALLATION SYSTEM

- Brick-wall, for floor mounted toilets installation
- Brick-wall, for wall-hung toilets installation
- Drywall, for wall-hung toilets installation
- Drywall, for floor mounted toilets installation.

SUPPORTS UP TO 400KG



OLI70 PLUS NEW
Complete range




GENERAL FEATURES FOR ALL VERSIONS

- Dual flush 6/3L in-wall cistern (adjustable to 4/2L or 4.5/3 L);
- Versions available: Mechanical and Pneumatic;
- Cistern made of regenerated polypropylene (PP), highly resistant to ambient temperatures;
- Inlet valve with delayed and silent opening PLUS system;
- Supplied with anti-condensation and acoustic insulation.

INCLUDES IN ALL VERSIONS

- Brick-wall fixing kit;
- G 1/2" stop valve;
- Toilet connection pipes;
- Sanitary ware fixing material (when applicable);
- Outlet bend Ø90/90 and adaptor Ø90/110;
- Sanitary ware fixing material (when applicable).

OLI70 PLUS NEW
Simflex

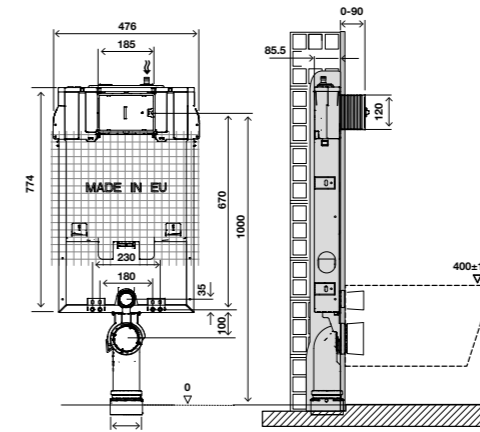


SPECIFIC FEATURES

- Compatible with all wall-hung toilets (6/3 litres version);
- Brick-wall installation;
- 90mm thick.



cod. **885882** Mechanic
cod. **889577** Pneumatic

OLI70 PLUS NEW
Direct

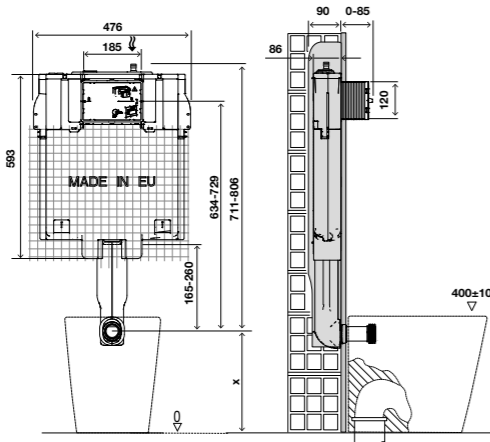


SPECIFIC FEATURES

- Compatible with all floor mounted toilets (6/3 litres version);
- Brick-wall installation;
- 90mm thick.



cod. **885005** Mechanic
cod. **889576** Pneumatic

OLI70 PLUS NEW
S90 Sanitarblock

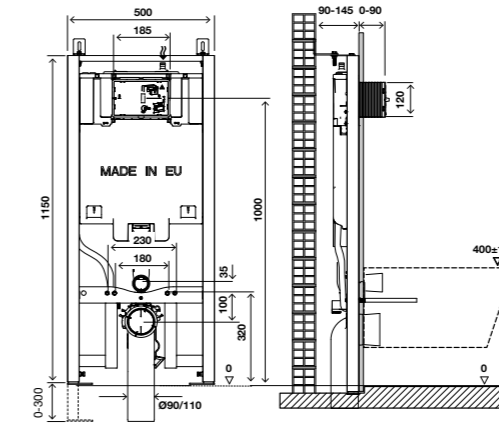


SPECIFIC FEATURES

- Compatible with all wall-hung toilets (6/3 litres version);
- Installation in brick-wall, thin wall or plasterboard;
- Easy and quick installation;
- Adjustable waste pipe curve in depth;
- Height adjustable from 0 to 300 mm;
- 90mm thick.



cod. **885130** Mechanic
cod. **890047** Pneumatic

ACCESSORIES IN-WALL CISTERNS OLI70 PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD
890081 Pneumatic Conversion Kit



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x180;
- Toilet fixing material.

COD
622501 Toilet connection pipe



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD
011229 Longer Sleeves for Wall-hung toilets



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD
086360 Outlet bend adaptor Ø90/110



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD
885108 Eccentric set connection 25mm



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD
885233 Bypass connector



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD
620071 Acoustic insulation for Wall-hung toilet and bidet



- Allows the connection between the cistern and the Shower toilet;
- Flexible hose DN6 QF3/8 X QF3/8 X1340mm;
- Flexible hose DN6 QF3/8 X QF3/8 X160mm;
- Easy and quick connection.

COD
890383 Kit SHT OLI70 PLUS

PART NUMBER GUIDE OLI70 PLUS

	Mechanic	Pneumatic	Mechanic		Pneumatic		Pallet					
			WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
	885005	889576	586x126x692	3.79	1	-	3.79	36	1.2	0.8	2.236	156.44
	885882	889577	805x150x635	6.848	1	-	6.848	26	1.2	0.8	2.23	198.048
	885130	890047	1180x140x530	14.395	1	-	14.395	20	1.2	0.8	2.28	307.9

OLI120 PLUS



SHOWER TOILET

Prepared for shower toilet installation. Easy way to choose multiple connections.



BLOCKADE

According to the scenario of construction site, the fixation feet have 3 positions and a metal block to adjust to the intended position.



FIXATION FEET

The fixation feet have a cross drilled to increase the margin of the holes, facilitating the installation.



FAST-FIT

Fast-Fit is a system that provides a fixation to the load bearing walls and allows for a fast and precise levelling of the frame.



RETROFIT


A solution incorporated into the OLI120 PLUS SHT that allows an intelligent seat & cover to be installed after the cistern installation. This system can be used as a water supply for the toilet seat & cover.



SMART TOILET AND HAND SHOWER

The OLI120 PLUS in-wall cistern includes pre-installation for a smart toilet and hand shower. The smart toilet and hand shower can be fitted either during the in-wall cistern installation or at a later stage.

Compatibility
Wide range of flush plates

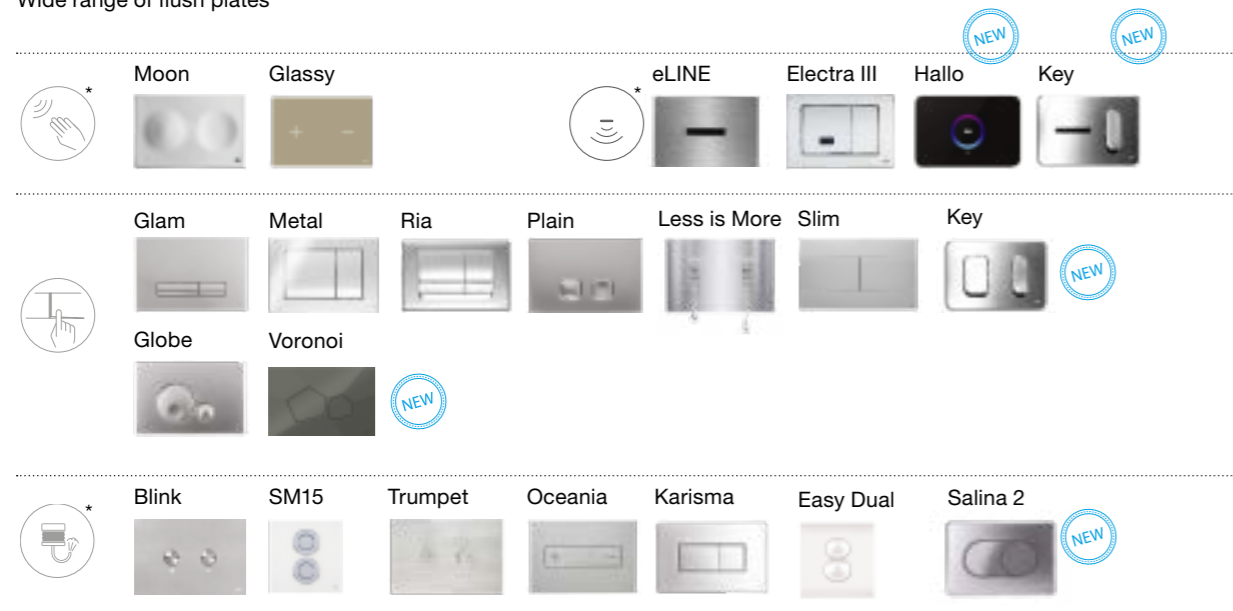

OLI120 PLUS NEW

MAINTENANCE
Transparent protection plate with levers block for quick and easy maintenance

FAST-FIT SYSTEM

PLUS
Saves up to 9l of water per day

SILENT VALVE CLASS 1 CERTIFIED

SHOWER TOILET
Prepared for shower toilet installation

OUTLET BEND
Fine adjustment of the outlet bend

HEIGHT ADJUSTABLE
in 200mm

SUPPORTS UP TO 400KG

FLUSH PLATE
Wide range of flush plates and actuations: mechanical, pneumatic, electronic and No-Touch

FLUSH VOLUME
Dual flush: 6/3L
Adjustable to 4/2l or 7/3L

OLIPURE
Cleans and sanitizes the toilet

INSTALLATION SYSTEM

- Brick-wall, for floor mounted toilets installation
- Brick-wall, for wall-hung toilets installation
- Drywall, for wall-hung toilets installation

ONE MAN ASSEMBLY
Foot locking system

OLI120 PLUS

Complete range



GENERAL FEATURES FOR ALL VERSIONS

- Dual flush 6/3L in-wall cistern (adjustable to 4/2L or 7/3L);
- Versions available: Mechanical, Pneumatic, Electronic, Hydroboost and AC versions available;
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Upon request some versions compliant with: NF/KIWA/Belgaqua/WRAS/KIWAK/SINTEF certifications;
- EN 14055 CE Marking;
- Compatible with all floor and wall-hung mounted toilets;
- Inlet valve with delayed and silent opening PLUS system;
- Brick-wall installation.


INCLUDES IN ALL VERSIONS

- Wall fixing kit;
- G 1/2" stop valve;
- Inlet and outlet toilet connection;
- Toilet fixing material (when applicable);
- Outlet bend and Ø90/110 adaptor (when applicable);
- Sanitary ware fixing material (when applicable).



OLI120 PLUS

Block

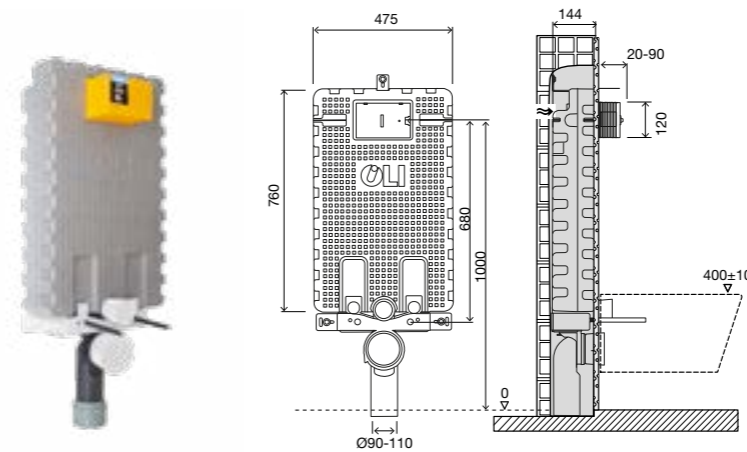

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall installation;
- Robust EPS coating that completely encloses the cistern and allows for faster installation;
- 144mm thick;
- Better sound isolation.



- cod. **885050** Mechanic Nano
- cod. **885053** Pneumatic Nano
- cod. **151339** Mechanic Azor
- cod. **154076** Pneumatic Azor

OLI120 PLUS

Sanitarblock NEW

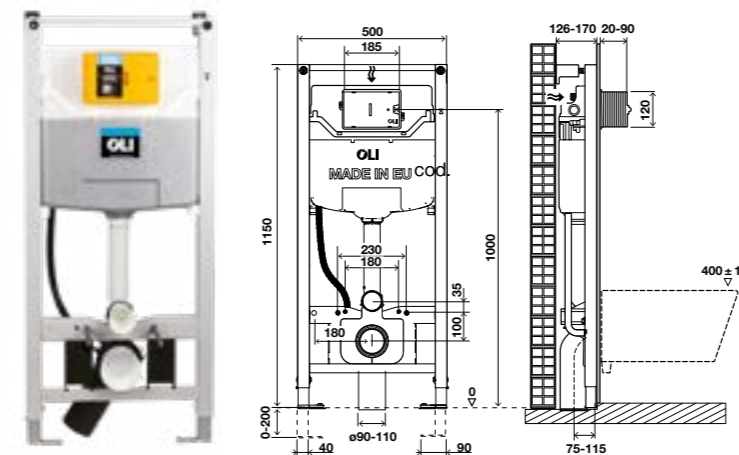

SPECIFIC FEATURES


- Wall-hung toilets up to 660mm long;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- Shower toilet pre-installation multiple connections;
- 126mm thick.



- cod. **885052** Mechanic Nano
- cod. **885055** Pneumatic Nano
- cod. **880780** Mechanic OLipure Azor
- cod. **878621** Cap AC Azor
- cod. **878846** Cap Hydroboost Azor
- cod. **177305** Electronic Azor
- cod. **177306** Pneumatic Azor
- cod. **099949** Mechanic Azor

OLI120 PLUS

Direct

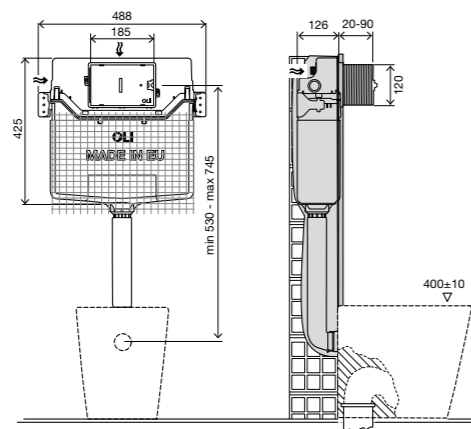

SPECIFIC FEATURES

- Compatible with all floor mounted toilets;
- Brick-wall installation;
- 126 mm thick.




- cod. **885049** Mechanic Nano
- cod. **099941** Mechanic Azor
- cod. **153964** Pneumatic Azor

OLI120 PLUS NORDIC

Sanitarblock

NEW

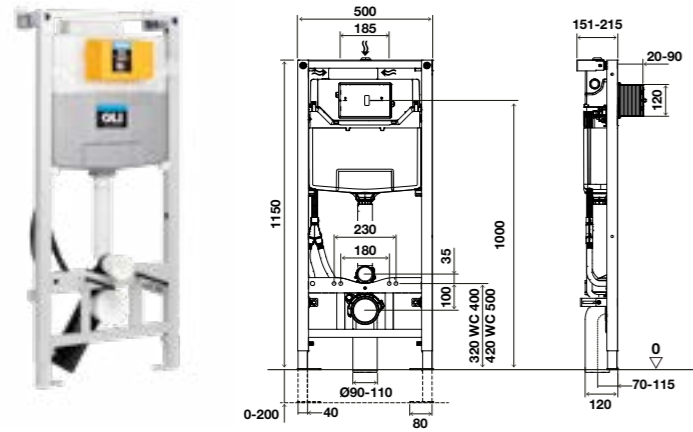

SPECIFIC FEATURES

- Pre-assembled structure for installation in front of masonry wall and finish in light wall, plasterboard or wood walls and technical support rail for light wall;
- Prepared for shower toilet installation;
- Pipe in pipe connection D18-25mm;
- 151mm thick;
- In accordance with the SINTEF standard.




cod. 887456 Mechanic Azor




OLI120 PLUS

Free-standing

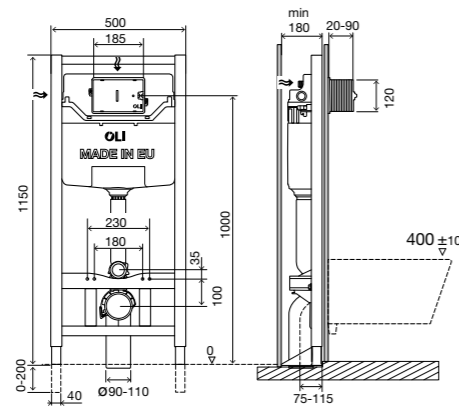

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Drywall installation;
- Frame fixed to the floor;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- 180mm thick.




cod. 099952 Mechanic Azor
cod. 099951 Pneumatic Azor
cod. 885847 Mechanic NF Azor



OLI120 PLUS

Height Adjustable Sanitarblock

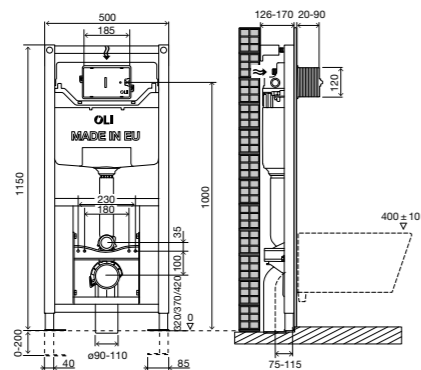

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Allows the height adjustment of the toilet fixation in three different positions before closed the wall, between 320, 370, 420mm;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- 126mm thick.



cod. 154083 Mechanic Azor

OLI120 PLUS HAPPY AIR

Sanitarblock

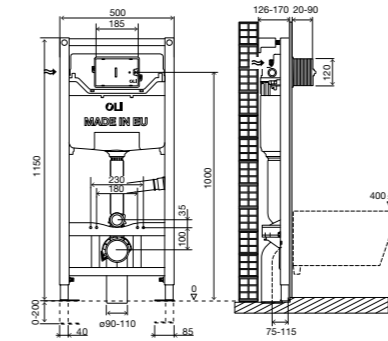


SPECIFIC FEATURES

- Wall-hung toilets up to 660mm long;
- Flush pipe for happy air system;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- 126mm thick.



cod. 883016 Mechanic Azor

HAPPY AIR

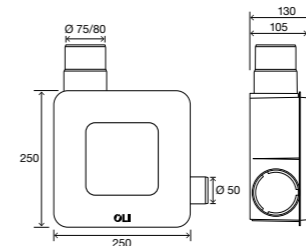


SPECIFIC FEATURES

- High extraction capacity (80m³/h);
- Removes 30% of odours;
- Removes 70% of condensation;
- Melanine filter – noise reduction;
- Turns off as soon as the client turns off the switch;
- 220V/50Hz;
- Capacity 65m³/h22W 31dB(A);
- Capacity 80m³/h29W 35dB(A).



cod. 887583

HAPPY AIR PLUS

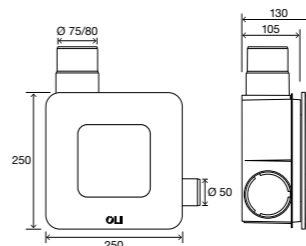

SPECIFIC FEATURES


- High extraction capacity (100m³/h);
- Removes 30% of odours;
- Removes 70% of condensation;
- Melanine filter – noise reduction;
- 960 Lumen LED that can be turn on independently of the extractor;
- Humidity sensor that can be set to automatically turn on;
- Possible to adjust the operating time after the user switches the switch off (2min-20min);
- Capacity 100m³/h12W 34dB(A);
- Capacity 80m³/h20W 38dB(A).



cod. 887588

OLI120 DOUBLE FRAME

WC | URINAL/WASHBASIN

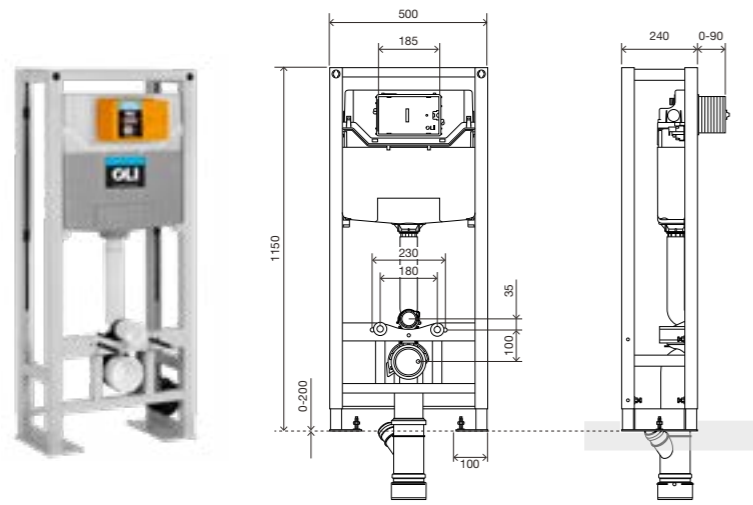


SPECIFIC FEATURES

- Frame with cistern and urinal or washbasin installed back-to-back;
- Freestanding double frame;
- Wall-hung toilets up to 660mm long
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- 240 mm thick.




cod. **882618** Azor


MORE BATHROOMS IN THE SAME SPACE.

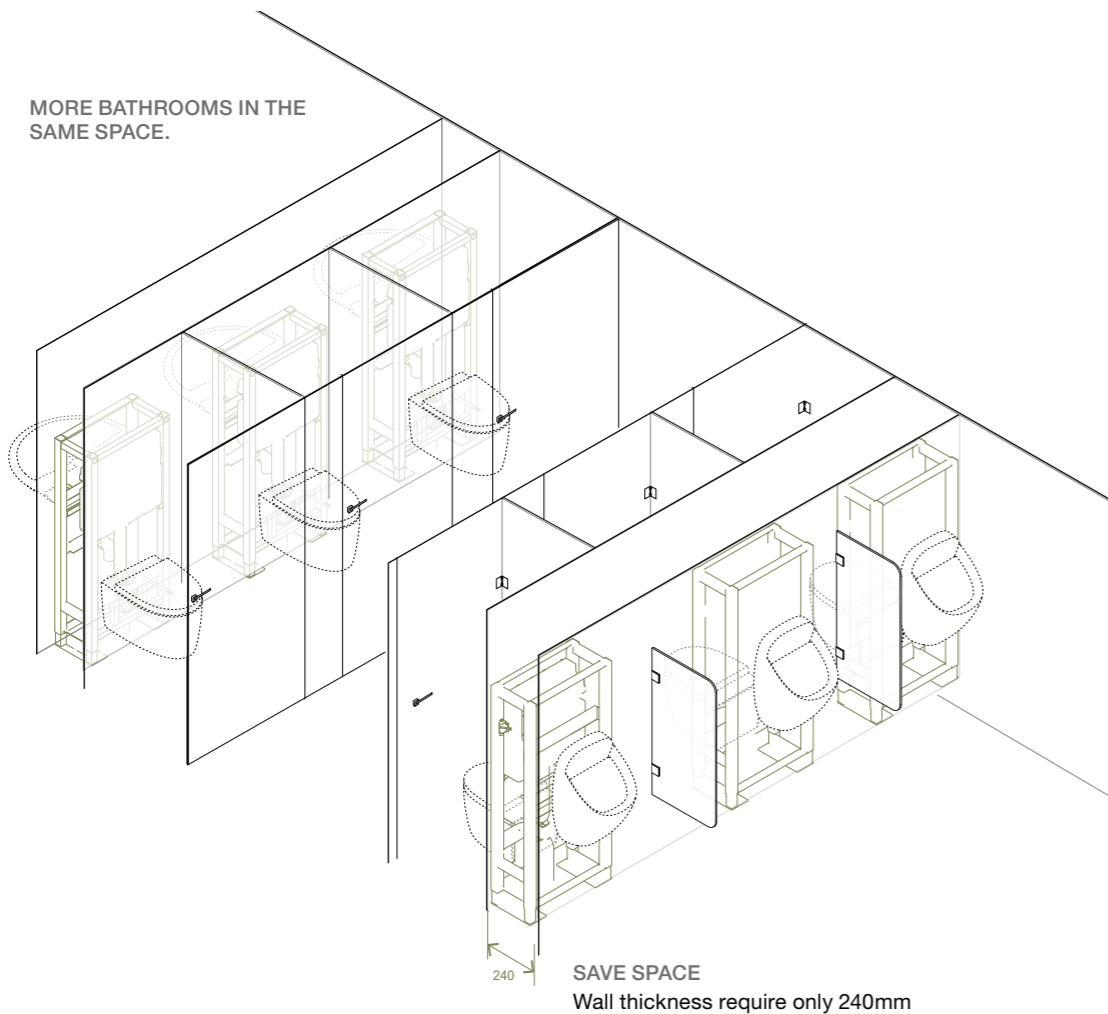


TOILET + WAHSBASIN WITH WALL MOUNTED TAP

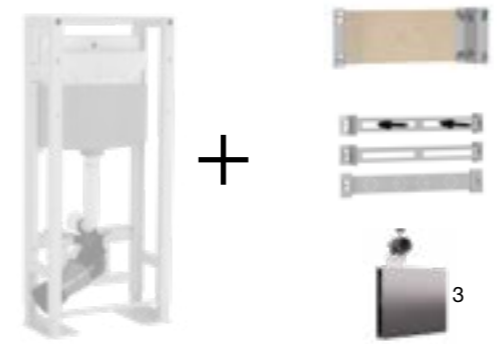

TOILET + WASHBASIN

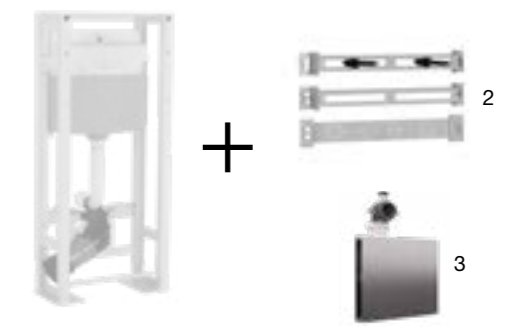

TOILET + URINAL

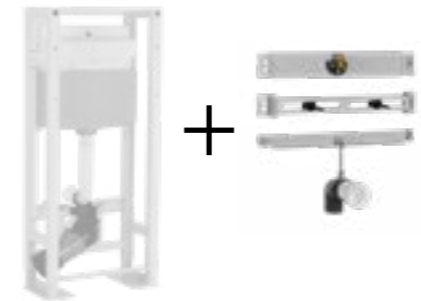

TOILET + URINAL WITH FLUXOMETER



WALL TAP/CONCEALED FLUSH VALVE

- Compatible with all taps and urinal concealed flush valve;
- Adjustable mounting wood panel;
- Fixing material.

cod. **881858**



WASHBASIN KIT FOR DOUBLE FRAME

- Easy and quick installation;
- Washbasin fixing material;
- Compatible with wall-hung washbasins;
- Outlet bend Ø40 32/50mm.

cod. **882613**



CONCEALED SIPHON

- Compatible for double frame with washbasin kit;
- Outlet bend Ø32-32mm;
- Wall plate can be customized.

cod. **883081**



URINAL KIT FOR DOUBLE FRAME

- Easy and quick installation;
- Urinal fixing material;
- Outlet bend Ø40 32/50mm
- G 1/2" fitting for water connection.

cod. **882612**

Independently of the bathroom, this product allows to place in one side a toilet and on the other side, a urinal or a washbasin, according to the acquisition of the kits and by sharing the same waste pipe connection, thanks to the evacuation pipe in Y shape. It is prepared to be fix to the floor suitable for plasterboard wall in technical frame.

ACCESSORIES IN-WALL CISTERNS OLI120 PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD
154084 Pneumatic Conversion Kit



- Pre-installation of the electric AC connection is needed;
- Transformer is supplied.

COD
878293 Ac conversion kit



- Uses the energy of water in motion;
- No need to connect to the power grid;
- **Suitable for intensive use.**

COD
878294 Hydroboost conversion kit



- Pre-installation of the electric connection is needed;
- Transformer is not supplied;
- Compatible: ELECTRA III flush plate.

COD
Electronic conversion kit



- Compatible with Glam flush plate.

COD
882129 OLIPURE kit



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD
889944 AMBIWAVE



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x180;
- Toilet fixing material.

COD
622501 Toilet connection pipe



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD
011229 Longer Sleeves for Wall-hung toilets



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD
885108 Eccentric set connection 25mm



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD
086360 Outlet bend adaptor Ø90/110



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD
885233 Bypass connector



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD
620071 Acoustic insulation for Wall-hung toilet and bidet



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the washbasin and tile.

COD
620072 Washbasin protection sponge




- Allows the connection between the cistern and the shower toilet;
- 1 flexible hose 1200mm;
- 2 flexible hose 3/8" x 3/8" 160mm;
- 1 stop valve 1/2" x 1/2";
- 1 brass connection (T).

COD
191887 SHT kit without shower




- Can be installed after the cistern is installed inside the wall.

COD
883088 Flow rate reducer



THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2'16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.

COD 
879808 Stop Fire



- Compatible with OLI120 BLOCK;
- Fixing accessories included.

COD
886820 Floor support system



- WC outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD
075413 Happy air kit PLUS




- Transform any OLI120 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air Plus fan.

COD
887588 Happy air kit







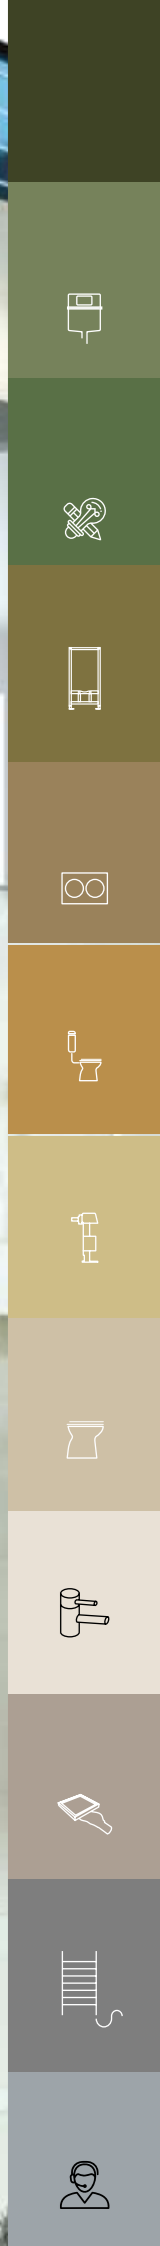


















- Transform any OLI120 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air fan.

COD
887583 Happy air kit



PART NUMBER GUIDE OLI120 PLUS

	 Mechanic	 OLIpure	 Pneumatic	 Electronic	 Hydroboost	 AC	 HAPPY AIR
 OLI120 PLUS Direct 885049 Nano 099941 Azor	-	-	153964 Azor	-	-	-	-
 OLI120 PLUS Block 885050 Nano 151339 Azor	-	-	885053 Nano 154076 Azor	-	-	-	-
 OLI120 PLUS Sanitarblock 885052 Nano 099949 Azor	880780 Azor	885055 Nano 177306 Azor	177305 Azor	878846 Azor	878621 Azor	883016 Azor Fan 887583 Fan Plus 887588	
 OLI120 PLUS Height Adjustable Sanitarblock 154083 Azor	-	-	-	-	-	-	
 OLI120 PLUS Sanitarblock NORDIC 887456 Nano	-	-	-	-	-	-	
 OLI120 PLUS Free-standing 099952 Azor 885847 NF Azor	-	099951 Azor	-	-	-	-	
 OLI120 PLUS Double Frame 882618 Azor	-	-	-	-	-	-	

 WxDxH	 Weight	 Qt.	 Multiple Box Dim	 Weight	 Qty per Pallet	 Pallet Height	 Pallet Width	 Pallet Length	 Weight
670x150x460	3.563	1	-	3.563	45	1.28	0.82	2.46	180.335
487x165x1079	6.422	1	-	6.422	28	1.2	1.01	2.3	199.816
487x165x1079	6.422	1	-	6.422	28	1.2	1.01	2.3	199.816
1180x140x530	16.135	1	-	16.135	20	1.2	0.8	2.48	342.7
1180x140x530	16.135	1	-	16.135	20	1.2	0.8	2.48	342.7
1180x140x530	15.939	1	-	15.939	20	1.2	0.8	2.35	338.78
1176x256x545	23.167	1	-	23.167	6	1.2	0.8	1.25	159.002

OLI74 PLUS



ADJUSTABLE METAL SUPPORT

The metal links are fixing supports to rely confidence during the installation of the cistern. Besides ensuring a higher resistance on the fixation, it increase the margin of adjustment according to the wall thickness.



FIXATION FEET


The fixation feet are adjustable in 150mm, allowing an easy installation of the cistern. For a regulation up to 300mm, OLI as a kit to help. See page 53.



ADJUSTABLE WASTE PIPE CURVE

Polypropylene curve, that connects the toilet to the waste pipe is adjustable in 45° and also adjustable in depth to match the construction site waste pipe.

Compatibility
Wide range of flush plates

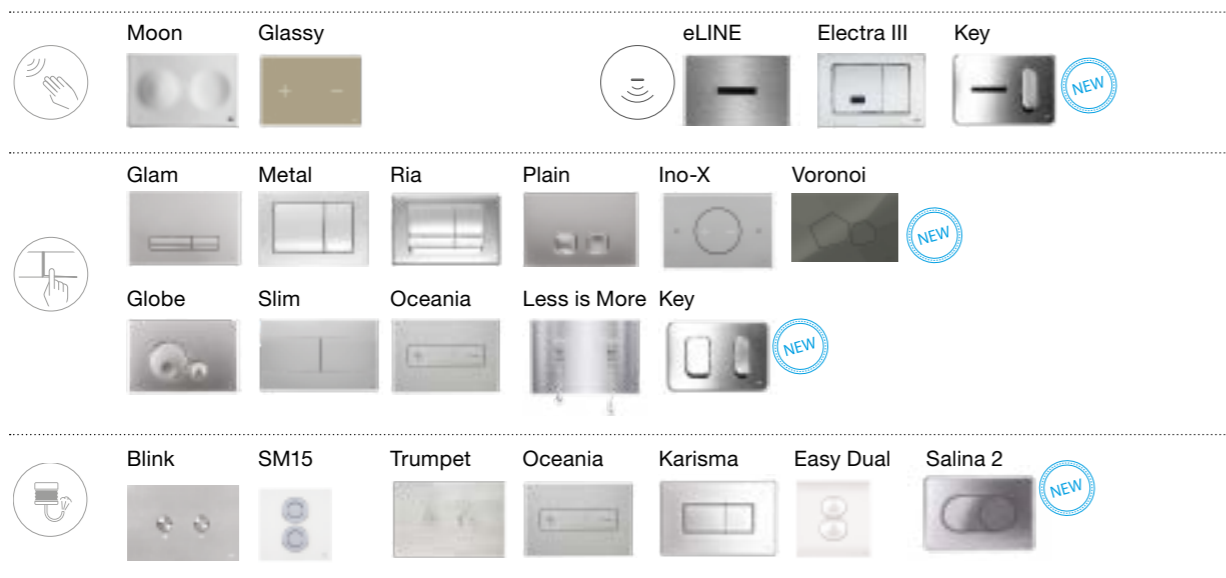

OLI74 PLUS



PLUS

Saves up to 9l of water per day

SILENT VALVE
CLASS 1
CERTIFIED



2 INLET VALVES

Allows you to connect the cistern to a second water source.



Minimum thickness

OUTLET BEND
Fine adjustment of the outlet bend



HEIGHT ADJUSTABLE in 150mm



SUPPORTS UP TO 400KG

FLUSH PLATE

Wide range of flush plates and actuations: mechanical, pneumatic, electronic and no-touch



FLUSH VOLUME

Dual flush: 6/3L. Adjustable to 4/2L or 4.5/3L.



HAPPY AIR

Fresh solution for air renewal

INSTALLATION SYSTEM

Brick-wall, for floor mounted toilets installation

Brick-wall, for wall-hung toilets installation

Drywall, for wall-hung toilets installation



Drywall, for floor mounted toilets installation.



OLIPURE

Cleans and sanitizes the toilet

MAXIMUM HYGIENE, MAXIMUM FRESHNESS

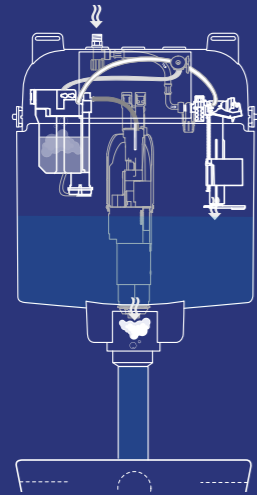


OLIpure®

OLIpure creates a fresh atmosphere and provides an immediate feeling of comfort and cleanliness, effortlessly. It is a safe and innovative internal system (concealed within the cistern) that releases 2ml of cleaning liquid with each flush, in a controlled manner. This liquid stands out for being kept in a closed circuit, unlike traditional tablets placed inside the cistern.


OLIpure keeps the water and the cistern components protected and is easy to refill, ensuring long life and efficiency.

HOW TO SAVE WATER IN YOUR CISTERN SYSTEM

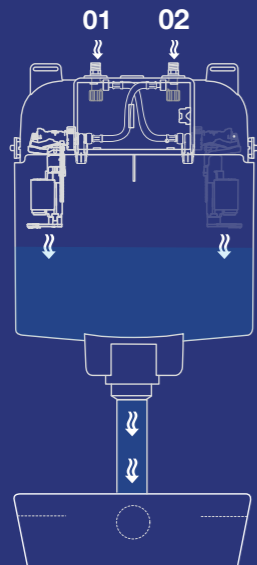

CISTERN WITH 2 INLET VALVES

This flushing cistern is distinguished by having two water inlet valves in its architecture. One for drinking water from the mains and another for non-potable water designed for rainwater (1) but applicable to other waters (boreholes water or water wells) ensuring that only clear and filtered water (2) is used. In this way it's possible to reuse rainwater for toilet flushing, saving drinking water that is essential for human consumption. It allows a more efficient use of the water resource and a saving in the water bill.

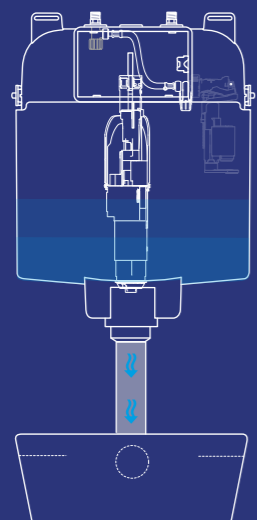


4/2 L

The combination of a 4-litre (full flush) and 2-litre (half flush) flush tank and an efficient and suitable toilet for this purpose results in immediate water savings.

OLI74 PLUS

OLIpure range

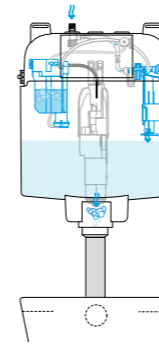

It is compatible with disinfectant liquids* available on the market and has a storage capacity of 450ml.

OLIpure is available in the OLI74 range and allows for an upgrade only on OLI120 Plus and Expert Plus products already installed with a separately sold kit.

cod. **880784** Mechanic OLIpure Sanitarblock S90 Azor

SPECIFIC FEATURES


- General Features of the OLI74 PLUS cistern or installation type on page 72;
- Mechanical flush plate;
- Internal hygienic system;
- 3/8" brass side tap.



*It is recommended to use liquid detergents without chlorine and with a viscosity between 150 and 300 cp (at 20°C). cp stands for "centipoise", a unit of measurement for viscosity.

OLI74 PLUS 2 inlet valves

Mechanic

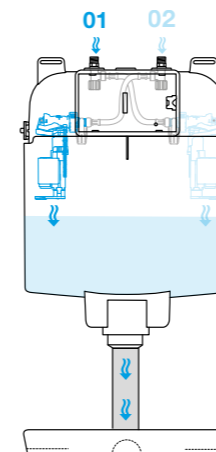

SAVE 100% of drinking water on toilet flushing.

Exclusive connection to a second source of water^(a,b)

SAVE 50% of drinking water on toilet flushing.

Connection to mains water + Connection to a second water source^(a,b)



^(a) This flushing cistern is distinguished by having two water inlet valves in its architecture.


01 One for drinking water from the mains
02 Another for non-potable water designed for rainwater but applicable to other waters (boreholes water or water wells) ensuring that only clear and filtered water is used^(b).

In this way it's possible to reuse rainwater for toilet flushing, saving drinking water that is essential for human consumption. It allows a more efficient use of the water resource and a saving in the water bill.

cod. **885057** Mechanic S90 Sanitarblock 2 inlet valves Nano

OLI74 PLUS 4/2 L

Mechanic

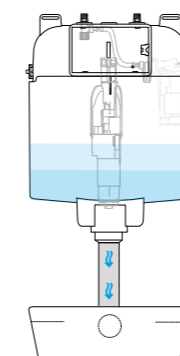

SAVE WATER IN BOTH FLUSHES (FULL AND HALF FLUSH)*

SAVE 2L in each full flush

SAVE 1L in each half flush.



*When compared to 6/3 litres cisterns.

cod. **885056** Mechanic 4/2l S90 Sanitarblock Nano

The HAPPY AIR system is the solution for air renewal in windowless bathrooms.


The high-powered extractor allows unpleasant odours to be extracted directly from the WC through the discharge pipe, while condensation is removed through a sleek and discreet plate installed on the wall or ceiling.

This system removes 30% of odours from the WC and 70% of the condensation present in the bathroom.



OLI74 PLUS HAPPY AIR

S90 Sanitarblock

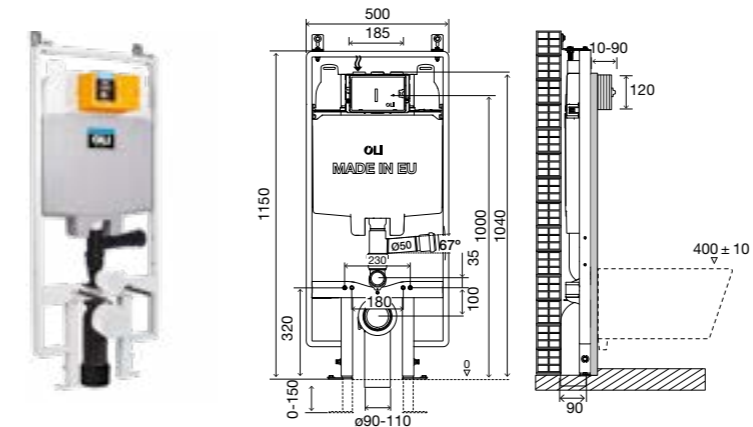


cod. 881821 Azor

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Flush pipe for happy air system;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 150mm;
- 90mm thick.



HAPPY AIR

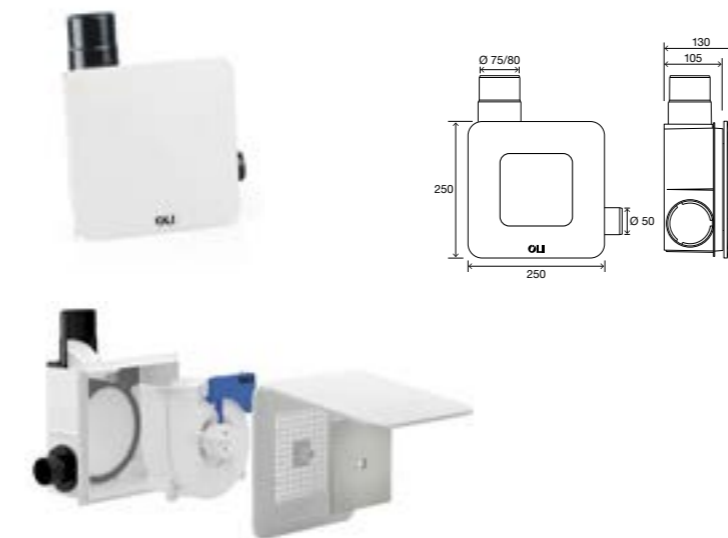

cod. 887583

SPECIFIC FEATURES

- High extraction capacity (80m³/h)
- Removes 30% of odours
- Removes 70% of condensation
- Melanine filter – noise reduction;
- Turns off as soon as the client turns off the switch;
- 220V/50Hz;
- Capacity 65m³/h22W 31dB;
- Capacity 80m³/h29W 35dB.



HAPPY AIR PLUS



cod. 887588

SPECIFIC FEATURES

- High extraction capacity (100m³/h)
- Removes 30% of odours
- Removes 70% of condensation
- Melanine filter – noise reduction;
- 960 Lumen LED that can be turned on independently of the extractor;
- Humidity sensor that can be set to automatically turn on;
- Possible to adjust the operating time after the user switches the switch off (2min-20min);
- Capacity 100m³/h12W 34dB(A);
- Capacity 80m³/h20W 38dB(A).



The measurements shown are in millimeters

OLI74 PLUS

Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4/2L and 4.5/3L);
- Versions available: mechanical, pneumatic, electronic, hydroboost and AC.
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Upon request some versions compliant with: SABS/SAL-WATERMARK/WRAS/KIWA/UPC/SASO/KIWAUK;
- EN 14055 CE Marking;
- Compatible with all floor and wall-hung mounted toilets;
- Inlet valve with delayed and silent opening PLUS system;
- Brick-wall installation.

INCLUDES IN ALL VERSIONS

- Wall fixing kit;
- G 1/2" stop valve;
- Inlet and outlet toilet connection;
- Toilet fixing material (when applicable);
- Outlet bend and Ø90/110 adaptor (when applicable);
- Sanitary ware fixing material (when applicable).

OLI74 PLUS

Simflex

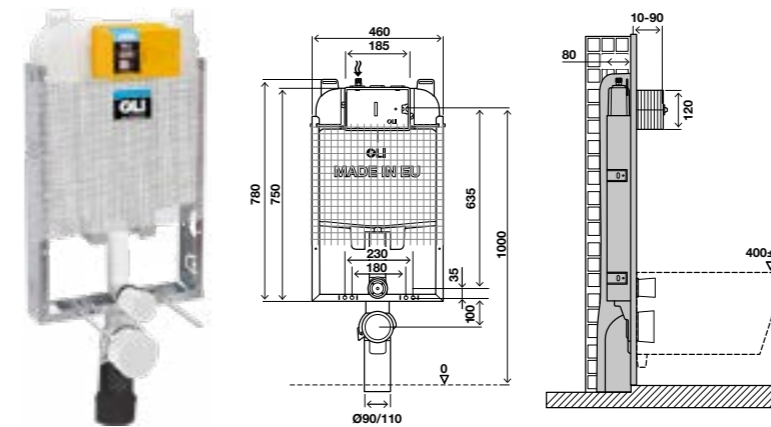

- cod. **885069** Mechanic Nano
- cod. **884228** Pneumatic Nano
- cod. **601901** Mechanic Azor
- cod. **002332** Pneumatic Azor


SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Brick-wall installation;
- 80mm thick.



OLI74 PLUS

Direct

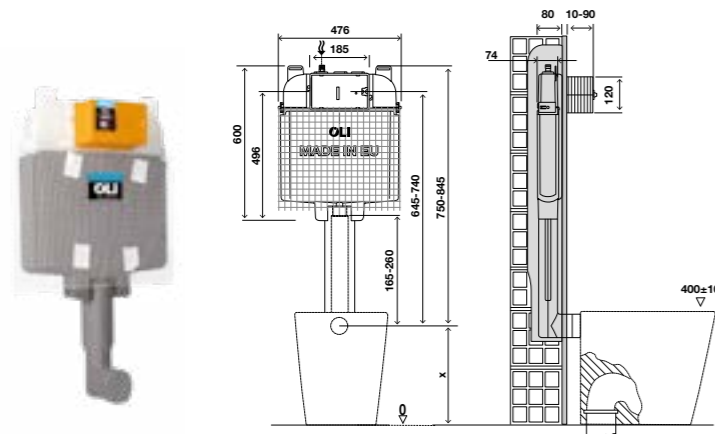

SPECIFIC FEATURES

- Compatible with all floor toilets;
- Brick-wall installation;
- 80mm thick.


* installation available with the application of the kit 216640 (page 53)



- cod. **885062** Mechanic Nano
- cod. **884203** Pneumatic Nano
- cod. **601601** Mechanic Azor
- cod. **601602** Pneumatic Azor

OLI74 PLUS

S90 Sanitarblock

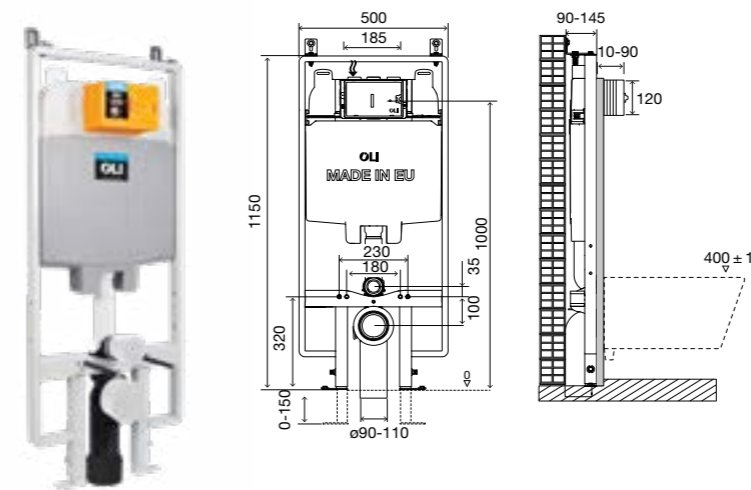

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall or drywall installation;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 150mm;
- Option kit to adjust until 300mm;
- 90mm thick.



- cod. **880784** Mechanic OLIpure Azor
- cod. **878655** Cap AC Azor
- cod. **878840** Cap Hydroboost Azor
- cod. **187650** Electronic Azor
- cod. **885056** Mechanic 4/2l Nano
- cod. **216248** Mechanic 4/2l Azor
- cod. **885057** Mechanic 2 inlet valves Nano
- cod. **880799** Mechanic 2 inlet valves Azor
- cod. **883134** Mechanic Nano
- cod. **601803** Mechanic Azor
- cod. **884235** Pneumatic Nano
- cod. **187649** Pneumatic Azor

OLI74 PLUS

Free-standing

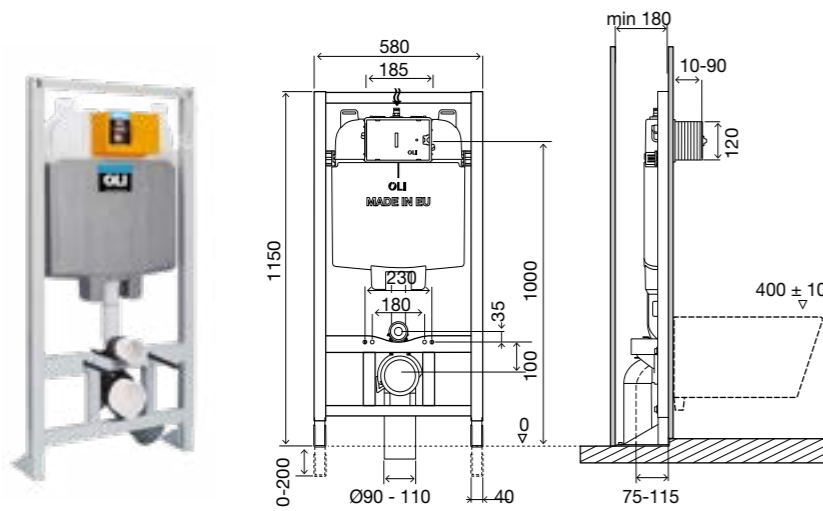

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Drywall installation;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- 180mm thick.



cod. **601822** Mechanic Azor

OLI74 PLUS

Free-standing Double

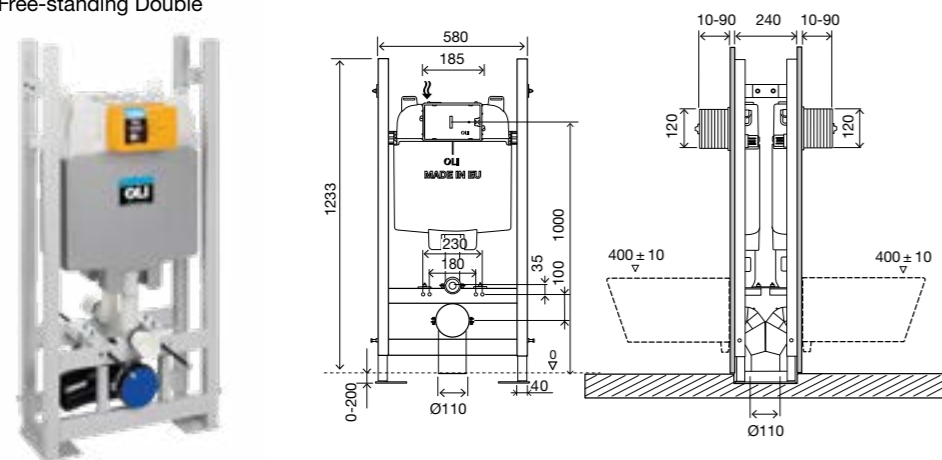

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Frame for back-to-back wall-hung toilet with two in-wall cisterns;
- Outlet bend Ø110;
- 240mm thick.



cod. **885061** Mechanic Nano

cod. **600859** Mechanic Azor



ACCESSORIES IN-WALL CISTERNS OLI74 PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD
601527 Pneumatic Conversion Kit



- Pre-installation of the electronic connection is needed;
- Transformer is supplied.

COD
878292 AC conversion kit




- Uses the energy of water in motion;
- No need to connect to the power grid;
- **Suitable for intensive use.**

COD
878285 Hydroboost conversion kit



- Pre-installation of the electrical connection is needed;
- Transformer is not supplied;
- Compatible: ELECTRA III flush plate.

COD
077754 Electronic conversion kit

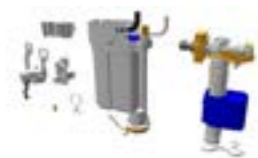

- Compatible with Glam flush plate.

COD
882129 Olipure kit



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD
889944 AMBIWAVE



- Compatible with Simflex frames;
- Fixing accessories included.

COD
886820 Floor support system



- Foot extension set 300mm;
- Solution to increase height adjustment.

COD
885109 Foot extension S90 oli74 plus



- Fixation kit for OLI74 PLUS;
- 1 Clamp;
- 2 Support fixation.

COD
216640 Drywall fixing kit



- Can be installed after the cistern is installed inside the wall.

COD
106572 Flow rate reducer



- Double outlet bend for wall-hung toilets with horizontal installation.

COD
622022 90/110

622023 110/110



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x180;
- Toilet fixing material.

COD
622501 Toilet connection pipe



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD
885233 Bypass connector



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD

885108

Eccentric set connection 25mm



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110




- Accoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Accoustic insulation for Wall-hung toilet and bidet



THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2'16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.

COD

879808

Stop Fire



- Double outlet bend for wall-hung toilets with vertical installation.

COD

111238

double outlet bend vertical



- Transform any OLI74 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air Plus fan.

COD

884340

Happy air kit PLUS



- Transform any OLI74 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air fan.

COD

884339

Happy air kit

















- WC outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.











COD

075413

wc outlet bend

PART NUMBER GUIDE OLI74 PLUS

	 Mechanic	 4/2L	 2 inlet valves	 OLIpure	 Pneumatic	 Electronic	 Hydroboost	 AC	 HAPPY AIR
OLI74 PLUS Direct 	885062 Nano 601601 Azor	-	-	-	884203 Nano 601602 Azor	-	-	-	-
OLI74 PLUS Simflex 	885069 Nano 601901 Azor	-	-	-	884228 Nano 002332 Azor	-	-	-	-
OLI74 PLUS S90 Sanitarblock 	883134 Nano 601803 Azor	885056 Nano 216248 Azor	885057 Nano 880799 Azor	880784 Azor	884235 Nano 187649 Azor	187650 Azor	878840 Azor	xxxxx Nano 878655 Azor	881821 Azor Fan 887583 Fan Plus 887588
OLI74 PLUS Free-standing 	601822 Azor	-	-	-	-	-	-	-	-
OLI74 PLUS Free-Standing Double 	885061 Nano 600859 Azor	-	-	-	-	-	-	-	-


 WxDxH	 Weight	 Qt.	 Multiple Box Dim	 Weight	 Qty per Pallet	 Pallet Height	 Pallet Width	 Pallet Length	 Weight
586x126x692	3.665	1	0	3.665	45	1.2	1	2.2	184.925
910x150x640	6.749	1	0	6.749	26	1.28	0.81	2.23	195.474
1180x140x530	12.433	1	0	12.433	20	1.2	0.8	2.35	268.66
1175x165x631	16.698	1	0	16.698	16	1.2	0.84	2.229	287.168
1305x306x670	33.478	1	0	33.478	7	1.31	0.8	2.383	254.346

EXPERT PLUS





ADJUSTABLE METAL SUPPORT

The metal links are fixing supports to rely confidence during the installation of the cistern. Besides ensuring a higher resistance on the fixation, it increase the margin of adjustment according to the wall thickness.

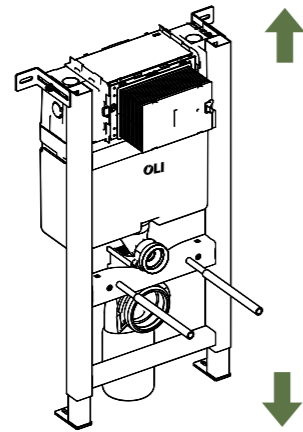

820MM HEIGHT


Expert Plus 820mm version guarantees the bathroom installations of toilets under window, stairs or in attic. This reduced height in-wall cistern prove to be reliable: perfect bathrooms with windows over the toilet.

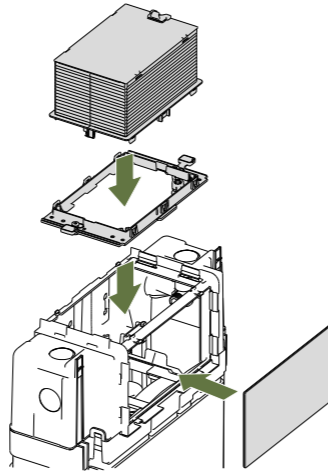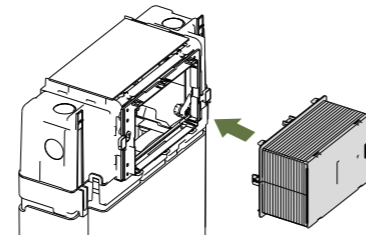

FRONT OR TOP ACTUATION

Usually the space above the toilet is more difficult to use. Build a shelf and install a floor mounted toilet or wall-hung toilet. With Expert Plus it is now possible to install the flush plates on the top or in front of the cistern.

Compatibility
Wide range of flush plates

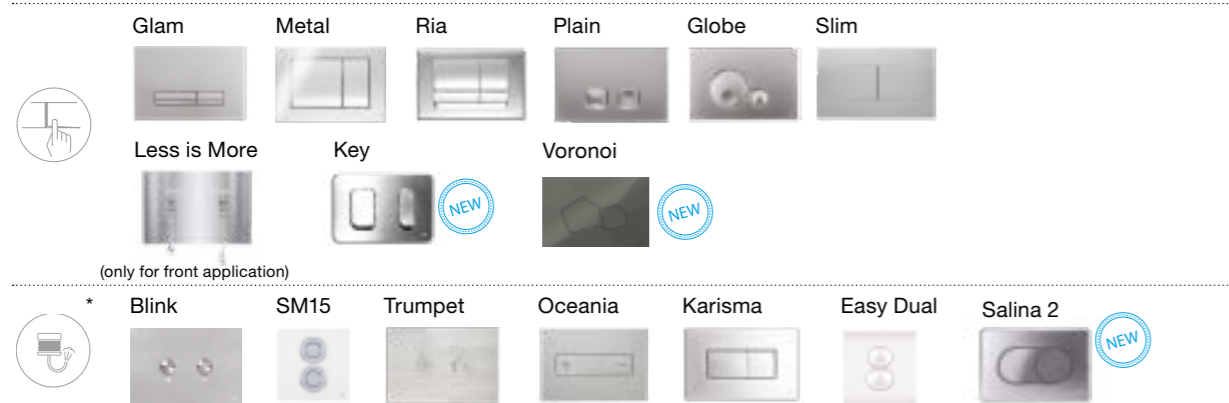


*With the respective transformation kits.

EXPERT PLUS

- APPLICATION**
Lower installation and additional top actuation
- PLUS**
Saves up to 9l of water per day
- SILENT VALVE CLASS 1 CERTIFIED**
- SUPPORTS UP TO 400KG**
- OUTLET BEND**
Fine adjustment of the outlet bend
- HEIGHT ADJUSTABLE**
in 200mm
- FLUSH PLATE**
Wide range of flush plates and actuations: mechanical and pneumatic
- FLUSH VOLUME**
Dual flush: 6/3L
Adjustable to 4/2L or 7/3L
- OLIPURE**
Cleans and sanitizes the toilet
- INSTALLATION SYSTEM**
 - Brick-wall, for floor mounted toilets installation
 - Brick-wall, for wall-hung toilets installation
 - Drywall, for wall-hung toilets installation

EXPERT PLUS

Complete range



*Note: For top application, ensure a minimum distance between the finished wall and the flush plate of 30mm.

GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4/2L or 7/3L);
- Top or front actuation/access;
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Mechanic or pneumatic actuation;
- Upon request some versions compliant with: Sai-Watermark/NF/Belgaqua/KIWAUK/WRAS certification;
- EN 14055 CE marking;
- Brick-wall installation;
- Lower/under bench installation possible;
- Inlet valve with delayed and silent opening PLUS system;
- 150mm thick.

INCLUDES IN ALL VERSIONS

- Wall fixing kit;
- G 1/2" stop valve;
- Inlet and outlet toilet connection;
- Toilet fixing material (when applicable);
- Outlet bend and Ø90/110 adaptor (when applicable);
- Sanitary ware fixing material (when applicable).

EXPERT PLUS

Direct

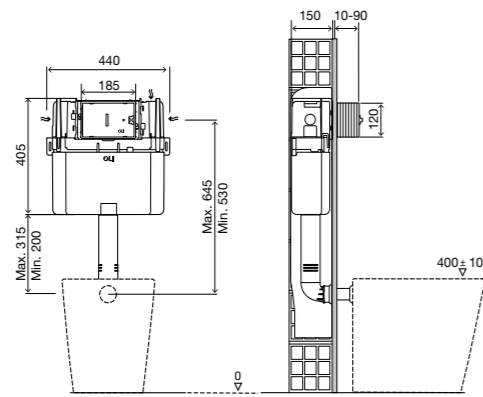

SPECIFIC FEATURES


- Compatible with all floor mounted toilets;
- Brick-wall installation;
- Lower/under bench installation possible;
- 150mm thick.



- cod. **721003** Mechanic Azor
cod. **721005** Pneumatic Azor

EXPERT PLUS

Simflex 820

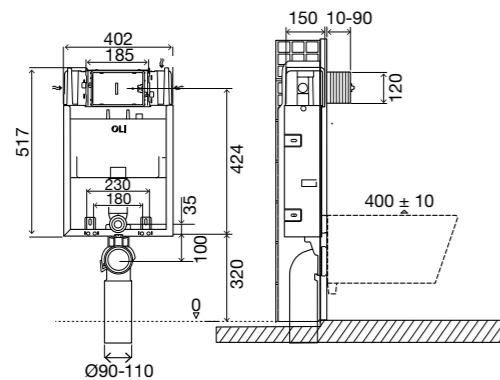

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall installation;
- Lower/under bench installation possible;
- 150mm thick.



- cod. **076456** Mechanic Azor
cod. **141960** Pneumatic Azor

EXPERT PLUS

Sanitarblock 820

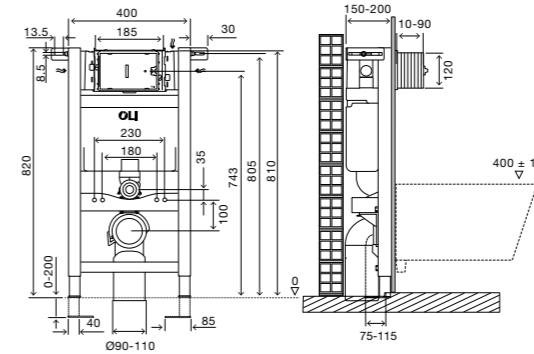

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation possible;
- 150mm thick.



- cod. **885065** Mechanic Nano
cod. **885067** Pneumatic Nano
cod. **721703** Mechanic Azor
cod. **721705** Pneumatic Azor
cod. **880787** Mechanic OLLpure Azor

EXPERT PLUS

Free-standing 820

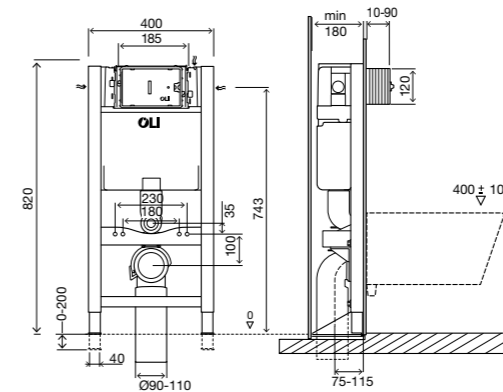

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation possible;
- 180mm thick.



- cod. **014092** Mechanic Azor
cod. **048375** Pneumatic Azor

ACCESSORIES IN-WALL CISTERNS EXPERT PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD
0035148 Pneumatic Conversion Kit



- Compatible with top actuation flush plates: Glam, Globe and Plain.

COD
211743 Mechanic conversion kit for top actuation



- Outlet valve mechanical anchors;
- Levers set.

COD
30497 Mechanic conversion kit EXPERT PLUS



- Compatible with Glam flush plate;
- Ambiwave liquid not included;
- Compatible with Expert Plus model (only front actuation)

COD
882129 Olipure kit



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD
889944 AMBIWAVE



- Can be installed after the cistern is installed inside the wall.

COD
106572 Flow rate reducer



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection toilet pipe Ø45x180;
- Toilet fixing material.

COD
622501 Toilet connection pipe



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD
011229 Longer Sleeves for Wall-hung toilets



- Polypropylene (PP) material;
- Adaptor to match with Ø110.

COD
086360 Outlet bend adaptor Ø90/110



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD
885108 Eccentric set connection 25mm



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD
885233 Bypass connector



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD
620071 Acoustic insulation for Wall-hung toilet and bidet

ACCESSORIES IN-WALL CISTERNS EXPERT PLUS




- Compatible with Simflex frames;
- Fixing accessories included.

COD
059272 Floor support system



- The ideal solution for overcoming obstacles;
- For use with Expert Plus and Quadra Plus cisterns, you must also purchase the pipe with 021266.

COD
622401 Flexible pipe extension 613mm



THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2*16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.

COD
879808 Stop Fire




- WC outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD
075413 wc outlet bend

	Mechanic	OLIpure	Pneumatic	Mechanic			Pneumatic			Pallet			
				WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
 EXPERT PLUS Direct 721003 Azor	-	-	721005 Azor	566x166x545	3.457	1	0	3.457	35	1.2	0.9	1.961	140.995
 EXPERT PLUS Simflex 820 076456 Azor	-	-	141960 Azor	775x448x176	7.327	1	0	7.327	30	1.2	0.8	2.12	239.81
 EXPERT PLUS Sanitarblock 820 885065 Nano 721703 Azor	880787 Nano	-	885067 Nano 721705 Azor	845x191x525	10.721	1	0	10.721	24	1.23	0.85	2.26	277.304
 EXPERT PLUS Free-standing 820 014092 Azor	-	-	048375 Azor	845x191x525	15.042	1	0	15.042	24	1.23	0.85	2.26	381.008



QUADRA PLUS

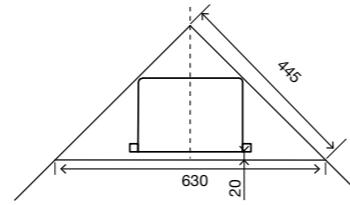


FAST-FIT
Fast-Fit is a system that provides a fixation to the load bearing walls and allows for a fast and precise levelling of the frame.



REDUCED DIMENSIONS
Quadra Plus, thanks to its 300mm reduced width, fits in all bathrooms.



CORNER KIT
With acquisition of corner kit, Quadra Plus is ideal for corner installations. See page 69.

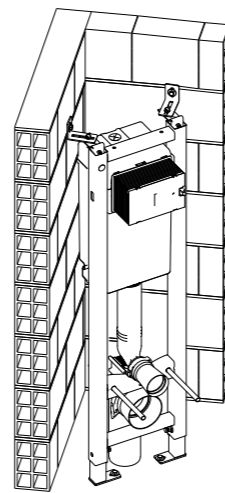

Compatibility
Wide range of flush plates

	Glam	Metal	Ria	Plain	Ino-X	Oceania	Globe
	Slim	Less is More	Voroi	Key			
	Blink	SM15	Trumpet	Oceania	Karisma	Easy Dual	Salina 2

QUADRA PLUS

FAST-FIT SYSTEM

PLUS
Saves up to 9l of water per day

SUPPORTS UP TO 400KG

REDUCED WIDTH
It can be installed in all bathrooms

OUTLET BEND
Fine adjustment of the outlet bend

HEIGHT ADJUSTABLE
in 200mm



FLUSH PLATE
Wide range of flush plates and actuations: mechanical, and pneumatic

FLUSH VOLUME
Dual flush: 6/3L

INSTALLATION SYSTEM
Brick-wall, for floor mounted toilets installation

Brick-wall, for wall-hung toilets installation

Drywall, for wall-hung toilets installation

IDEAL FOR CORNER APPLICATION
Necessary acquisition of the kit on page 69.

QUADRA PLUS

Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern;
- Compatible with Mechanical and Pneumatic flush plates;
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Upon request some versions compliant with: NF certification;
- EN 14055 CE marking;
- Compatible with all floor and wall-hung mounted toilets;
- Inlet valve with delayed and silent opening PLUS system;
- 187 mm thick.

INCLUDES IN ALL VERSIONS

- 215mm flush pipe;
- G 1/2" stop valve;
- Toilet connection pipe Ø45;
- Sanitary ware fixing material (when applicable).

QUADRA PLUS

Direct

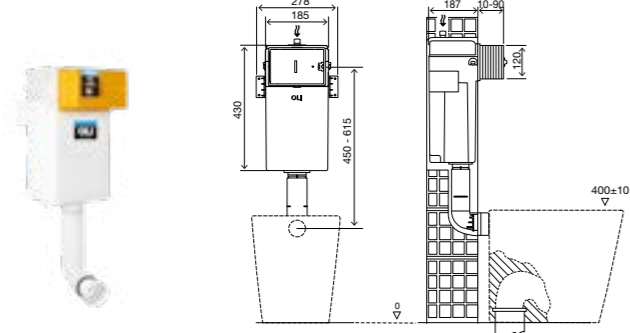

SPECIFIC FEATURES


- Compatible with all floor toilets;
- Brick-wall installation;
- 278mm reduced width;
- 187mm thick.



cod. **720002** Mechanic Azor
cod. **037172** Pneumatic Azor

QUADRA PLUS

Sanitarblock

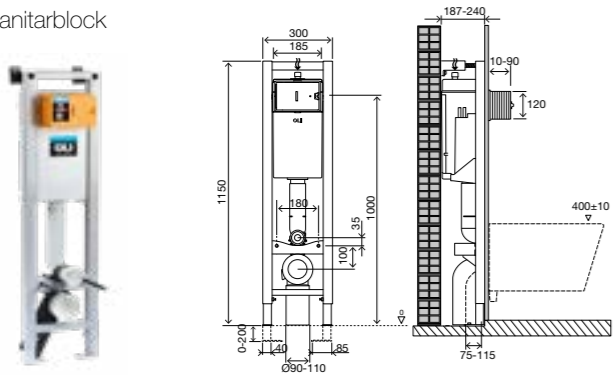

SPECIFIC FEATURES


- Compatible with wall-hung toilets with a 180mm fixation length;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation with Fast-Fit system;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width;
- 187mm thick.



cod. **885060** Mechanic Nano
cod. **885058** Pneumatic Nano
cod. **135974** Mechanic Azor
cod. **141945** Pneumatic Azor

QUADRA PLUS

Free-standing

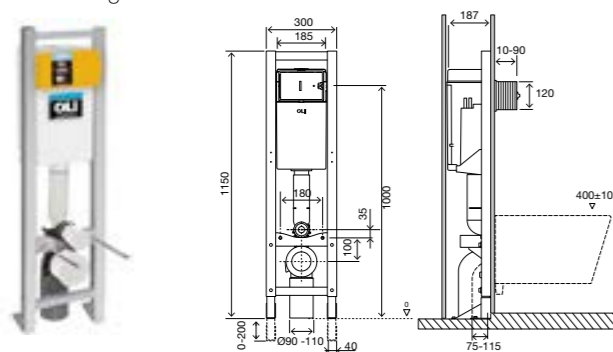

SPECIFIC FEATURES

- Compatible with wall-hung toilets with a 180mm fixation length;
- Drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width;
- 187mm thick.



cod. **722021** Mechanic Azor
cod. **187103** Pneumatic Azor

ACCESSORIES IN-WALL CISTERNS QUADRA PLUS



- 2 pneumatic pipes with 1.5m length;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

101773

Pneumatic Conversion Kit



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Acoustic insulation for Wall-hung toilet and bidet



- Ideal for corner application.

COD

719183

Corner Kit Sanitarblock



- The solution to overcome obstacles;
- For EXPERT and QUADRA PLUS an additional flush pipe is needed (Code 021266).

COD

622401

Flexible pipe extension 613mm



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection toilet pipe Ø45x180;
- Toilet fixing material.

COD

622501

Toilet connection pipe




- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD
885108 Eccentric set connection 25mm



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD
885233 Bypass conector

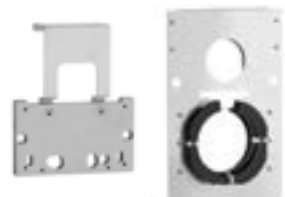

THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2'16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.




COD
879808 Stop Fire




- Toilet outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.


COD
075413 Toilet outlet bend

PART NUMBER GUIDE QUADRA PLUS

	Mechanic	Pneumatic	Mechanic		Pneumatic			Pallet				
			WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
QUADRA PLUS Direct 	720002 Azor	037172 Azor	286x205x610	2.802	1	0	2.802	64	1.2	0.83	2.6	199.328
QUADRA PLUS Sanitarblock 	885060 Nano 135974 Azor	885058 Nano 141945 Azor	1179x228x340	11.546	1	0	11.546	21	1.2	0.8	2.22	262.466
QUADRA PLUS Free-standing 	722021 Azor	187103 Azor	1179x228x340	12.634	1	0	12.634	20	1.2	0.8	2.42	272.68

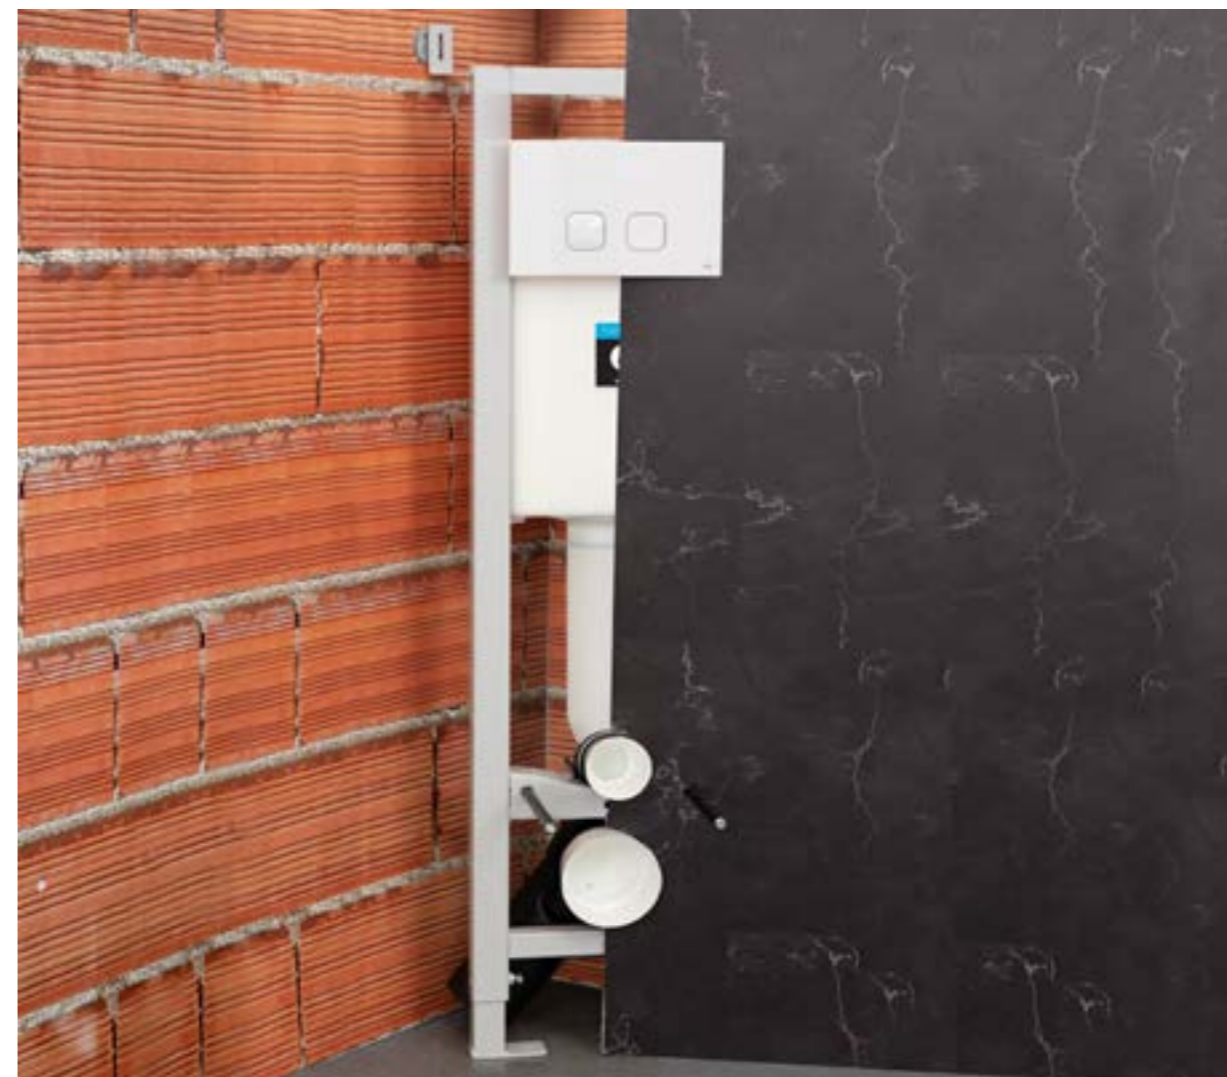

OLI80



ONE MAN ASSEMBLY

Assembly can be done by only one person, allowing for a fast and precise levelling of the frame.



BLOCKADE

According to the scenario of construction site, the fixation feet have 3 positions and a metal block to adjust to the intended position.



FIXATION FEET

The fixation feet have a cross drilled to increase the margin of the holes, facilitating the installation.




FAST-FIT

Fast-Fit is a system that provides a fixation to the load bearing walls and allows for a fast and precise levelling of the frame.

Compatibility
Wide range of flush plates



OLI80


FAST-FIT SYSTEM

POLYPROPYLENE (PP)
Highly resistant to ambient temperatures;



SUPPORTS UP TO 400KG


OUTLET BEND
Fine adjustment of the outlet bend



HEIGHT ADJUSTABLE in 200mm



COST-BENEFIT RANGE

FLUSH PLATE
Compatible with a wide range of mechanical actuation flush plates


FLUSH VOLUME
Dual flush: 6/3L
Adjustable to 4.5/3L

INSTALLATION SYSTEM
 Brick-wall, for floor mounted toilets installation

 Brick-wall, for wall-hung toilets installation

 Drywall, for wall-hung toilets installation


ONE MAN ASSEMBLY
Foot locking system



OLI80
Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4.5/3L);
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Mechanical actuation;
- Upon request compliant with: Belgaqua certification;
- EN 14055 CE marking;
- Compatible with all floor and wall-hung mounted toilets.

INCLUDES IN ALL VERSIONS

- Flush pipe;
- Wall fixing kit;
- Net for easier grout adhesion;
- G 1/2" stop valve;
- WC connection pipe Ø45;
- Sanitary ware fixing material (when applicable).



OLI80
Direct

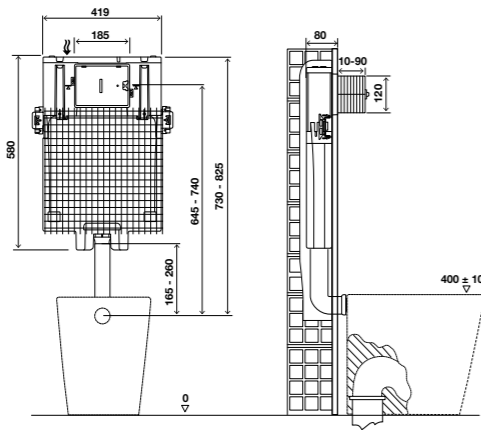


SPECIFIC FEATURES

- Compatible with all floor mounted toilets;
- Flexible pipe height 430 to 840mm;
- Brick-wall installation;
- 80mm thick.



cod. 885070 Mechanic Nano

OLI80
Squat pan

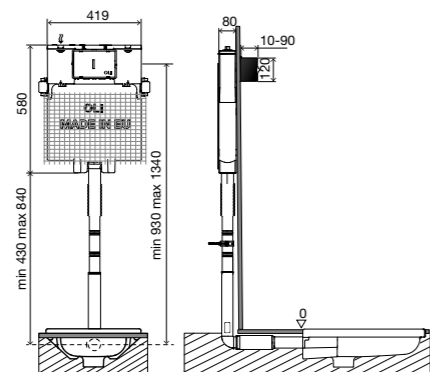


SPECIFIC FEATURES

- Compatible with all toilet at floor level or floor mounted;
- Flexible pipe height 430 to 840mm;
- Brick-wall installation;
- 80mm thick.



cod. 045058 Mechanic Nano

OLI80
Simflex

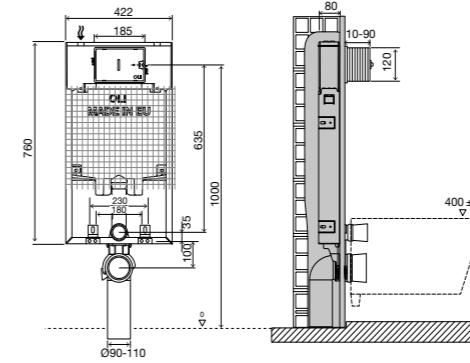


SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Brick-wall installation;
- Outlet bend 90°;
- 80mm thick.



cod. 885110 Mechanic Nano
cod. 600251 Mechanic Azor

OLI80
Sanitarblock

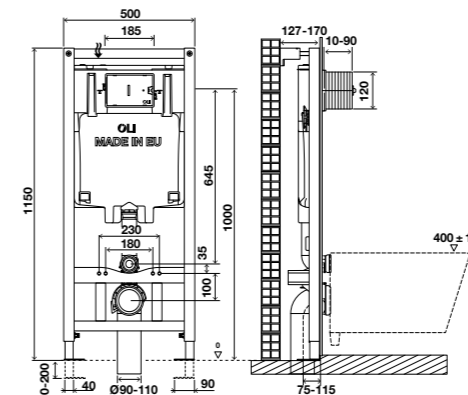


SPECIFIC FEATURES

- Wall-hung toilets up to 660mm long;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- Brick-wall or drywall installation;
- 120mm thick.



cod. 885111 Mechanic Nano
cod. 600151 Mechanic Azor

OLI80
Sanitarblock seawater

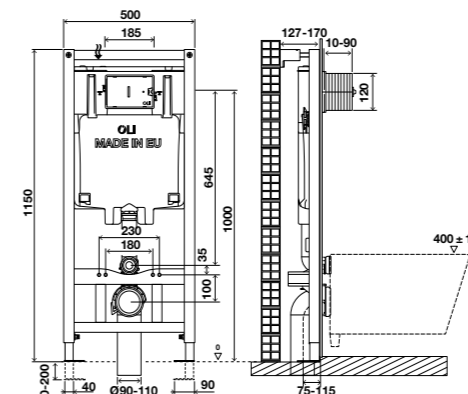

SPECIFIC FEATURES

- Wall-hung toilets up to 660mm long;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- Brick-wall or drywall installation;
- 127mm thick.
- Flushing cistern without any metal components, prepared to be used with seawater and prevent a risk of corrosion.



cod. 885232 Mechanic Azor

ACCESSORIES IN-WALL CISTERNS OLI80



- Can be installed after the cistern is installed inside the wall.

COD

106572

Flow rate reducer



- Compatible with OLI Simflex frames;
- Fixing material included.

COD

886820

Floor support system



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection Toilet Connection Pipe Ø45x180;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD

885108

Eccentric set connection 25mm



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass conector



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Acoustic insulation for Wall-hung toilet and bidet



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- The solution to overcome obstacles;
- For EXPERT and QUADRA PLUS an addiconal flush pipe is needed (Code 021266).

COD

622401

Flexible pipe extension 613mm








- Compatible with Simflex frames;
- Fixing accessories included.


COD

059272

Floor support system



	Mechanic	Seawater	📦		📦		📦					
			WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
OLI80 Direct 	885070 Nano	-	595x130x700	3.805	1	0	3.805	36	1.2	0.8	2.29	156.98
OLI80 Squat pan 	045058 Nano	-	595x130x700	4.18	1	0	4.18	36	1.2	0.8	2.29	170.48
OLI80 Simflex 	885110 Nano 600251 Azor	-	916x166x565	5.091	1	0	5.091	22	1.2	0.9	1.99	132.002
OLI80 Sanitarblock 	885111 Nano 600151 Azor	-	1180x140x530	13.143	1	0	13.143	20	1.2	0.8	2.35	282.86
OLI80 Sanitarblock Salt water 	- 885232 Azor	-	1180x140x530	13.072	1	0	13.072	20	1.2	0.8	2.35	281.44

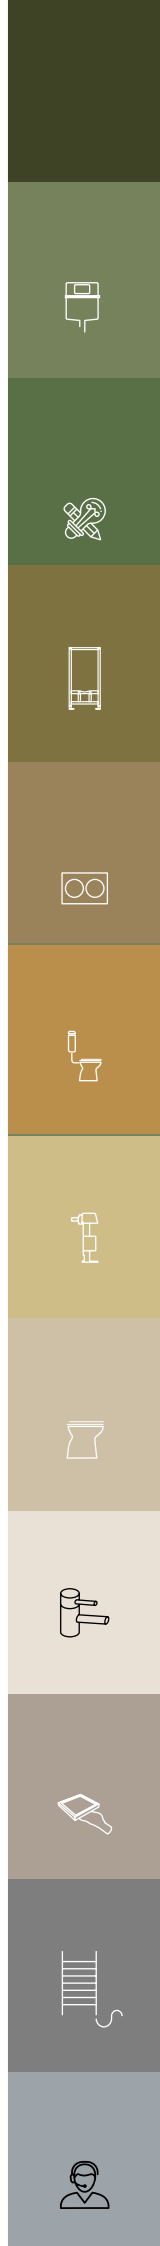



EASY MOVE 84
 SANITARY MODULE 89



Brick-wall, wall-hung toilet



Brick-wall, washbasin



AC power-mains



Supports up to 400kg



Drywall, wall-hung toilet



Drywall, washbasin



Reduced mobility



Supports up to 150kg



Pneumatic actuation




OPTIMISE YOUR SPACE


WITH SANITARY MODULE SOLUTIONS

GOOD REASONS TO REDESIGN THE BATHROOM


Walls do not need to be open for installation;
Existing water connections can be used;
A modern design in every bathroom.

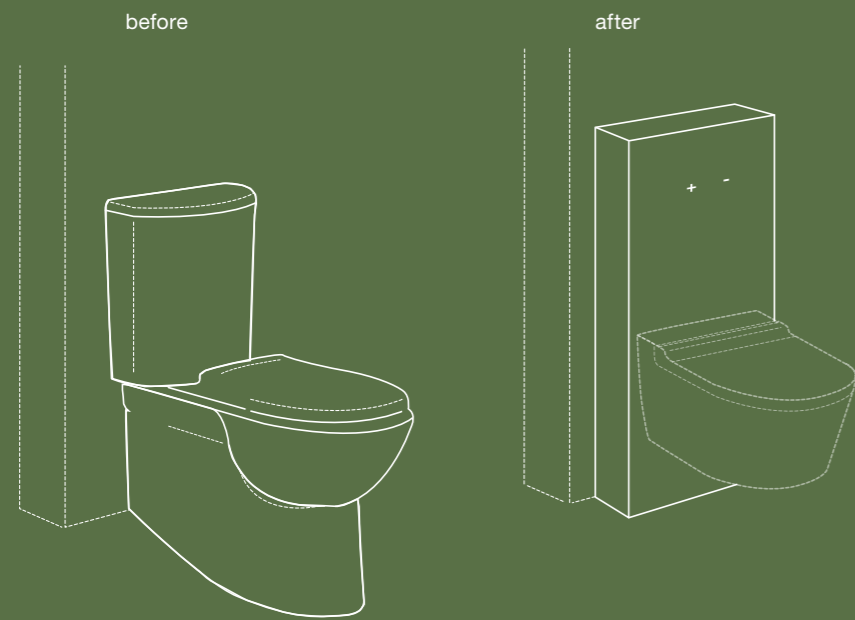

QR-INOX

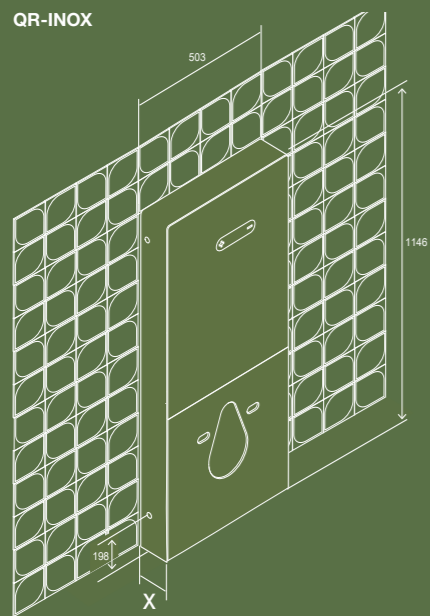

SEAL BOX

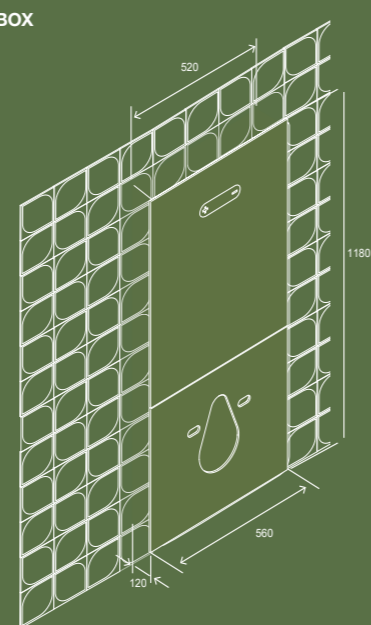


* X = 108mm for floor-mounted or wall-hung version;
190mm for free-standing version.

A BATHROOM FOR EVERYONE

WITH EASY MOVE SOLUTIONS

Committed to developing a safe and comfortable bathroom for all, OLI has several solutions designed for people with reduced mobility, the elderly and children. The Easy Move range was developed to facilitate the day-to-day at home, and in spaces like nursing homes, hospitals, shopping centers or airports.

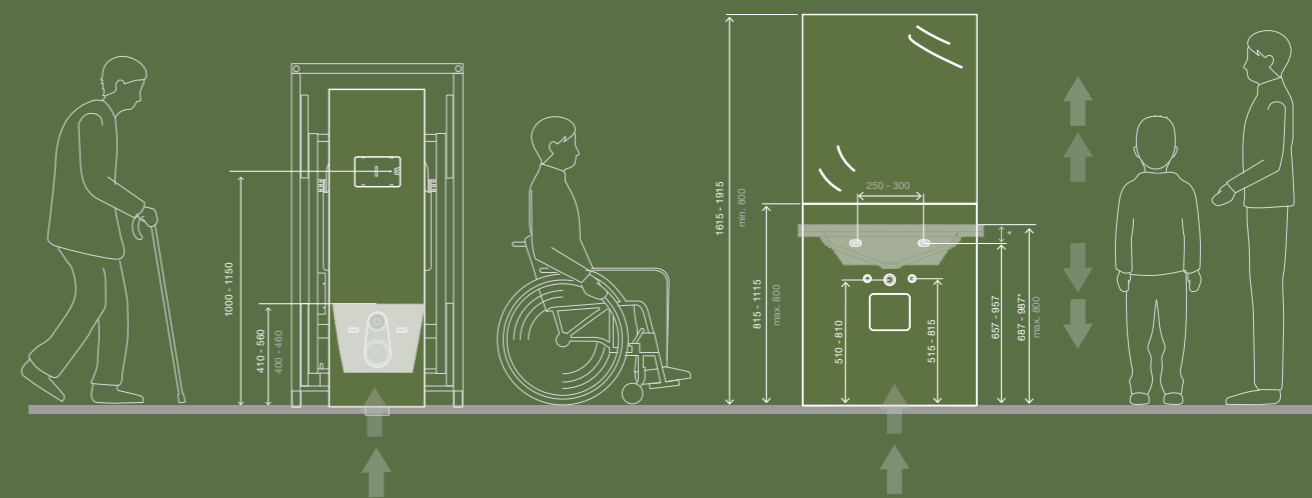

■ EASY MOVE'S DIMENSIONAL RANGE
■ DIMENSIONAL RANGE ACCORDING TO STANDARDS



FINISHES AVAILABLE

The product is available in both black and white tempered glass with 6mm of thickness.

FLEXIBLE OUTLET BEND

This is the component responsible for connecting the Easy Move to the sewer. Made of EPDM, a resistant plastic to the continuous, with a width of 150mm.

SILENT MOVEMENT

The engine exerts a lifting force and the sound of the engine is almost imperceptible during operation. Also the engine is extremely powerful with a thrust of more than 600kg offering maximum reliability. The movement speed is of 28mm per second, allowing the toilet to move quickly along the frame.



EASY MOVE WC



GENERAL FEATURES

- Adjustable frame with OLI74 Plus dual flush cistern 6/3L;
- Ergonomic system that is adjustable in height by 150mm;
- Compatible with all wall-hung toilets;
- Silent electric engine;
- Power supply: 220V/110 (50/60Hz);
- Power: 120 Watt;
- Insulation rating: IP66;
- Movement velocity of: 28mm/s;
- Push power: 6000N (ca 600kgf);
- Traction power 3000N (ca 300kgf);
- Limit switch;
- Frame tested for a 400kg load;
- Easy and quick installation with fast fit system;
- Available tempered glass front cover in black or white (6x400x1345mm);
- Frame and glass are sold separately;
- Flush plate and glass not included.

INCLUDES

- Wireless remote control;
- Wall-fixing material and toilet fixing material;
- Inlet and outlet toilet connection;
- Flexible overflow pipe;
- Adaptor Ø90/110.



- cod. **048159** EASY MOVE WC
- cod. **021408** Glass Black
- cod. **021409** Glass White
- cod. **879143** Lift-up support rails

EASY MOVE WC

FAST-FIT SYSTEM
Allows a quick and easy adjustment


FLUSH PLATE
Wide range of flush plates and actuations: mechanical, pneumatic, electronic and no-touch

SUPPORTS UP TO 400KG

INSTALLATION SYSTEM

- Brick-wall, for wall-hung toilets installation
- Drywall, for wall-hung toilets installation

Compatibility
Wide range of flush plates

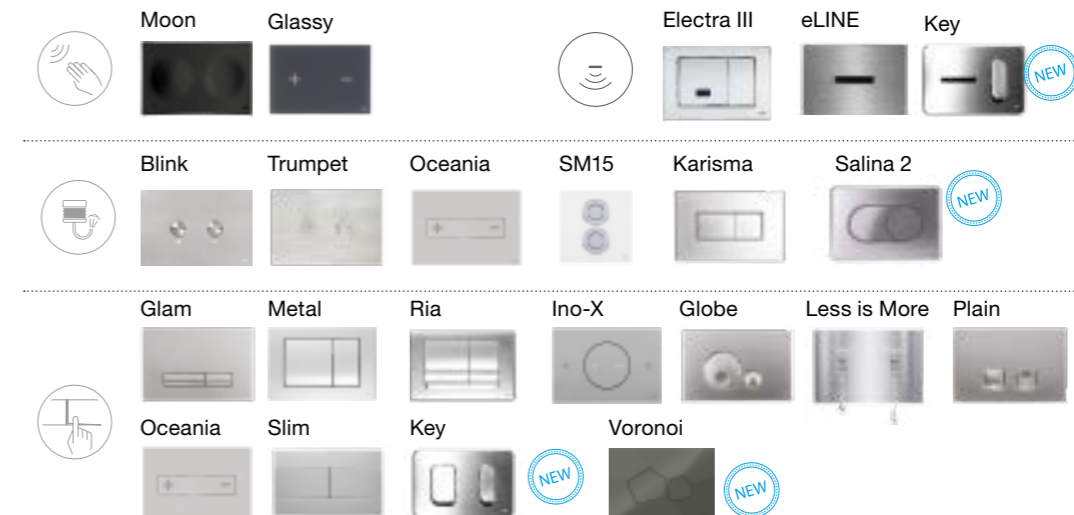

FINISHES
Tempered glass available in white or black

WIRELESS REMOTE CONTROL

SUPPORT RAILS
Product is already prepared to receive support bars

FLEXIBLE OUTLET PIPE
Flexible pipe that accompanies the adjustment of the height of the toilet.



FINISHES AVAILABLE

The product is available in both black and white tempered glass with 6mm of thickness.



SILENT MOVEMENT

The motor exerts a lifting force and its sound is almost imperceptible during operation. The speed of movement is 28mm per second, allowing the washbasin to move safely along the frame.



HIDDEN SIPHON

For hidden washbasin connections of ø32, this concealed siphon guarantees the maintenance access through magnets.

EASY MOVE WASHBASIN



FAST-FIT SYSTEM
3 easy steps



ERGONOMIC SYSTEM
Adjustable in height by 300 mm

INSTALLATION SYSTEM

Brick-wall, for wall-hung toilets installation

Drywall, for wall-hung toilets installation



SUPPORTS UP TO 150KG

HIDDEN SIPHON
Guarantees easy access for maintenance

EASY MOVE

Washbasin



GENERAL FEATURES


- Adjustable frame for washbasin;
- Ergonomic system that is adjustable in height by 300mm;
- Compatible with the most wall-hung washbasins;
- Silent electric engine;
- Mains supply 220V/110 (50/60Hz);
- Power: 120 W;
- Insulation rating: IP66;
- Movement speed: of 28mm/s;
- Push power: 6000N (ca 600kgf);
- Limit switch;
- Frame tested for a 150kg load;
- Easy and quick installation with fast fit system;
- Available tempered glass front cover in black or white (6x700x810mm);
- Mirror and glass not included.

INCLUDES

- Concealed siphon;
- Wireless remote control;
- 2x G 1/2" water connections;
- 2x flexible hoses;
- Wall-fixing material and washbasin fixing material.



- cod. **881673** EASY MOVE Washbasin
- cod. **883045** White glass 6x700x810mm
- cod. **883046** Black glass 6x700x810mm
- cod. **883048** Mirror 6x700x800mm

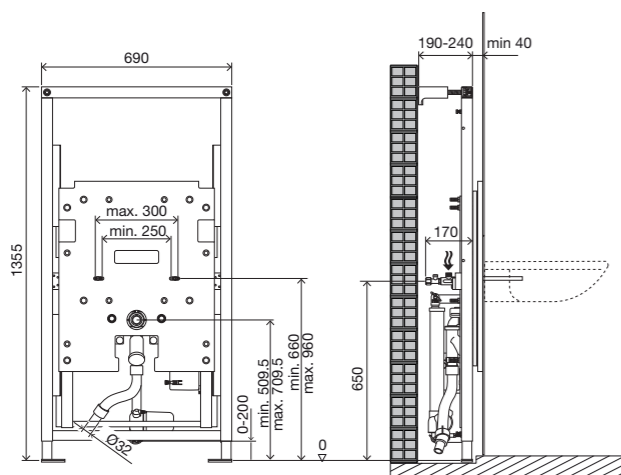

WIRELESS REMOTE CONTROL



NO-TOUCH VERSION

The flush is activated with the approach of the hand, without touching the module, thanks to the use of capacitive sensors. The AC version, with connection of the sensors to the power grid, allowing the flush to be activated with the approach of the hand.



PNEUMATIC VERSION

Comes with a stainless steel swinging selector button in a brushed finish for activating the half flush and the complete flush. The button's rounded shape provides the sanitary modules with nobility and distinctiveness.



STAINLESS STEEL

The edge around the sanitary modules is made of one piece brushed stainless steel.



FLOOR MOUNTED TOILET

QR-Inox Floor is compatible with all floor mounted toilets available in the market.



WALL-HUNG TOILET

QR-Inox Hung toilet is compatible with all Wall-hung toilets available in the market*.

QR-INOX / SEAL BOX



FLUSH VOLUME
Dual flush: 6/3L.
Adjustable to 4.5/3L

SILENT VALVE CLASS 1 CERTIFIED



PLUS
Saves up to 9l of water per day

STAINLESS STEEL EDGE
One piece, brushed stainless steel frame



SUPPORTS UP TO 400KG



5 POSSIBLE WATER CONNECTIONS
Multiple water connections allow a higher adaptability to the installation requirement




PNEUMATIC
The pneumatic version comes with a stainless steel swinging selector button in a brushed finish for activation the flush

FINISHES
6mm tempered glass, bi-parting, available in white and black finish

QR-INOX

Wall-hung

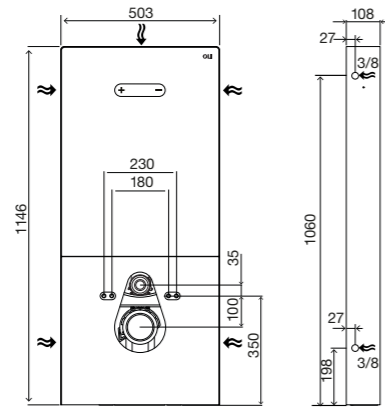

GENERAL FEATURES

- Dual flush Sanitary Module 6/3L;
- Compatible with all wall-hung toilets;
- Delayed refilling – PLUS technology inlet valve;
- 108mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Outlet bend and Ø90/110 adaptor;
- Toilet fixing material;
- EN 14055 CE marking.

INCLUDES IN ALL VERSIONS


- Internal frame fixing material;
- Inlet and outlet toilet connection;
- G ½" stop valve;
- Flexible hose ½" / ¾", 250mm.



- cod. **061568** Black button Pneumatic
- cod. **878641** Black no-touch cap AC
- cod. **061565** White button Pneumatic
- cod. **878640** White no-touch cap AC

SEAL BOX

Wall-hung

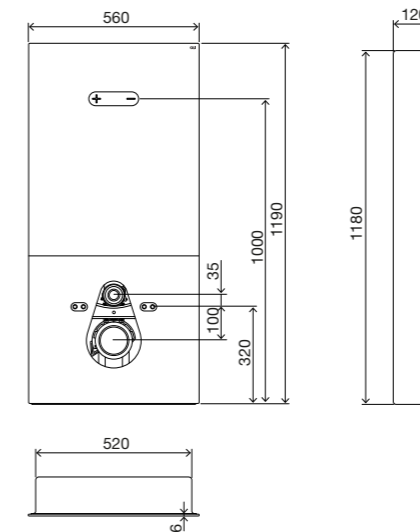

GENERAL FEATURES

- In-wall installation with glass front panel visible;
- Leakage prevention box in ABS and PMMA;
- Dual flush Sanitary Module 6/3L;
- Compatible with all wall-hung toilets;
- Brick-wall and drywall installations;
- Delayed refilling – PLUS technology inlet valve;
- 120mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Outlet bend and Ø90/110 adaptor;
- Toilet fixing material;
- EN 14055 CE marking.

INCLUDES IN ALL VERSIONS


- Internal frame fixing material;
- Inlet and outlet toilet connection;
- G ½" stop valve;
- Flexible hose ½" / ¾", 250mm.



- cod. **880450** Black button Pneumatic
- cod. **880372** White button Pneumatic

QR-INOX

Floor

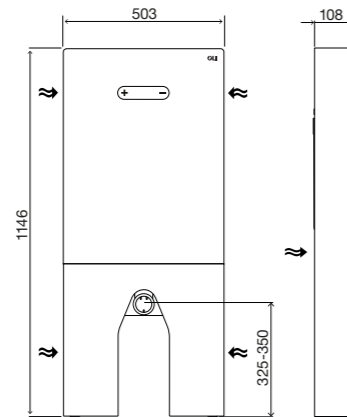

GENERAL FEATURES

- Dual flush Sanitary Module 6/3L;
- Compatible with all floor mounted toilets;
- Delayed refilling – PLUS technology inlet valve;
- 108mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Flexible outlet WC (min 220 to 570mm);
- EN 14055 CE marking;
- Solid and drywall installations.

INCLUDES IN ALL VERSIONS


- Internal frame fixing material;
- Inlet and outlet toilet connection;
- G ½" stop valve;
- Flexible hose ½" / ¾", 250mm.



- cod. **061563** Black button Pneumatic
- cod. **878643** Black no-touch cap AC
- cod. **061562** White button Pneumatic
- cod. **878642** White no-touch cap AC

SEAL BOX

Floor

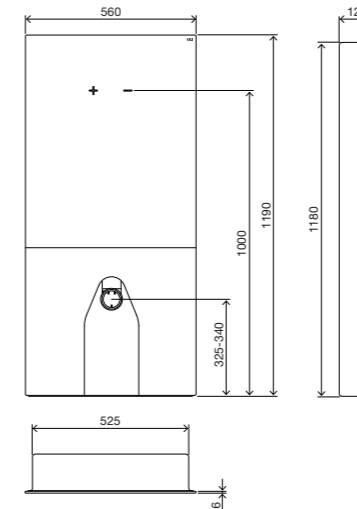

GENERAL FEATURES

- In-wall installation with glass front panel visible;
- Leakage prevention box in ABS and PMMA;
- Dual flush Sanitary Module 6/3L;
- Compatible with all floor mounted toilets;
- Brick-wall and drywall installations;
- Delayed refilling – PLUS technology inlet valve;
- 120mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Flexible outlet WC (min 220 to 570mm);
- EN 14055 CE marking.



- cod. **880456** Black button Pneumatic
- cod. **880455** White button Pneumatic

ACCESSORIES EASY MOVE RANGE



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

601527

Pneumatic Conversion Kit



- Pre-installation of the electronic connection is needed;
- Power Supply included is supplied.

COD

878292

Ac conversion kit



- Uses the energy of water in motion;
- No need to connect to the power grid;
- **Suitable for intensive use.**

COD

878285

Hydroboost conversion kit



- Pre-installation of the electrical connection is needed;
- Power Supply is not included;
- Compatible: ELECTRA III flush plate.

COD

077754

Electronic conversion kit



- Brushed 304 stainless steel tube Ø 30 mm;
- Synthetic resin flange;
- Vertical locking;
- Maximum weight capacity, 120kg;
- Laboratory tests, 225kg.

COD

879143

Barras de apoio

ACCESSORIES SANITARY MODULES



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110



- Length 175mm to 385mm;
- Exit Ø90/110;
- Toilet connection Ø90.

COD

108185

S-bend outlet toilet



- Length 220mm to 570mm;
- Exit Ø90/110;
- Toilet connection Ø80/100.

COD

079929

Flexible outlet bend toilet



- Height 118mm;
- Exit Ø100;
- Toilet connection Ø90/110.

COD

881608

Eccentric 20mm



- Height 125mm;
- Exit Ø110;
- Toilet connection Ø90/110.

COD

881613

Eccentric 40MM





- Length 300mm;
- Exit Ø110;
- Toilet connection Ø90.


COD

108380


Horizontal outlet toilet


PART NUMBER GUIDE SANITARY MODULES

MODEL	 Pneumatic	 Cap AC
	QR-INOX White □	061565 Hung wc
061562 Floor		878642 Floor
QR-INOX Black ■	061568 Hung wc	878641 Hung wc
	061563 Floor	878643 Floor
SEAL BOX White □	880372 Hung wc	-
	880455 Floor	-
SEAL BOX Black ■	880450 Hung wc	-
	880456 Floor	-

WxDxH	Weight	Qt.			Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
			Multiple Box Dim	Weight					
687x517x100	25.67	1	-	25.67	5	1.2	0.8	1.57	148.35
687x517x100	20.873	1	-	20.873	5	1.2	0.8	1.57	124.365
697x529x90	25.65	1	-	25.65	5	1.2	0.8	1.57	148.25
687x517x100	22.005	1	-	22.005	5	1.2	0.8	1.57	130.025
1206x601x282	28.017	1	-	28.017	5	1.2	0.8	1.57	160.085
1206x601x282	24.945	1	-	24.945	5	1.2	0.8	1.57	144.725
730x571x100	25.917	1	-	25.917	5	1.2	0.8	1.57	149.585
1206x601x282	20.12	1	-	20.12	5	1.2	0.8	1.57	120.6

PART NUMBER GUIDE EASY MOVE RANGE


	Glass Black	Glass White	Mirror	Lift-up support rails
EASY MOVE WC 	EASY MOVE WC 048159	EASY MOVE WC 048159	-	879143
EASY MOVE WC Glass	GLASS 021408	GLASS 021409	-	879143
EASY MOVE WASHBASIN 	EASY MOVE WASHBASIN 881673	EASY MOVE WASHBASIN 881673	-	-
EASY MOVE WASHBASIN Glass	GLASS 883046	GLASS 883045	-	-
EASY MOVE WASHBASIN Mirror	-	-	883048	-

WxDxH	Weight	Qt.			Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
			Multiple Box Dim	Weight					
1490x220x765	40.956	1	-	40.956	5	1.2	0.8	1.65	224.78
1420x66x495	9.176	1	-	9.176	10	1.2	0.8	0.85	111.76
1400x250x725	32.923	1	-	32.923	5	1.2	0.8	1.56	184.615
908x110x813	9.815	1	-	9.815	5	1.2	0.8	0.71	69.075
908x110x813	10.029	1	-	10.029	5	1.2	0.8	0.71	70.145







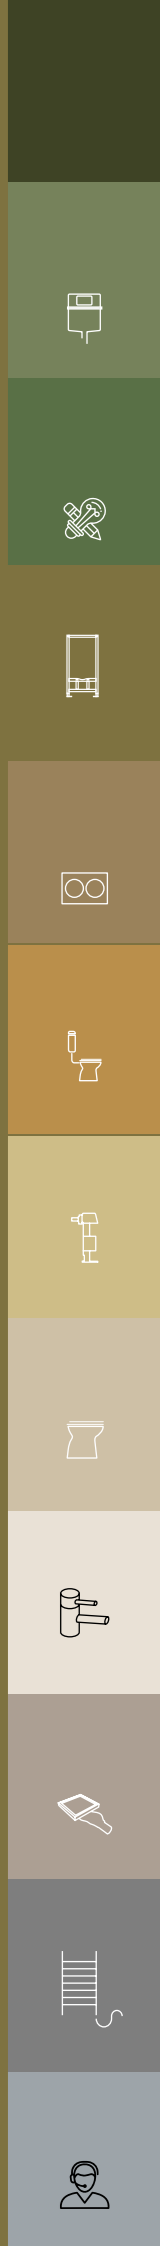



WC SANITARBLOCK	100
WC FREE-STANDING	100
CERAMIC SEPARATOR	101
URINAL DIVIDER	101
URINAL	101
WC FRAME	102
EASY	102
ECO WC/BIDET	103
BIDET SIMFLEX	103
BIDET SANITARBLOCK	104
WASHBASIN SIMFLEX	105
WASHBASIN SANITARBLOCK	105
SHOWER FRAME	106
CONCEALED SIPHON	106


















- | | | | | | |
|--|--|--|-----------------------|--|----------------------|
| | Brick-wall, wall-hung toilet and bidet | | Brick-wall | | One man assembly |
| | Drywall, wall-hung toilet and bidet | | Drywall | | Economic |
| | Brick-wall, urinal | | Brick-wall, washbasin | | Supports up to 400kg |
| | Drywall, urinal | | Drywall, washbasin | | |




COMPATIBILITY

COMPLEMENTARY FRAMES / SANITARY WARE

		WC			URINAL
					
		SANITARBLOCK	FREE-STANDING	FLUSH VALVE	SANITARBLOCK
		•		•	•
		•	•	•	•
					•
		•	•	•	
RIVER	BIDET				
	WC	•	•	•	
LAKE	BIDET				
	WC	•	•	•	
LAGOON	BIDET				
	WC	•	•	•	
KAI	URINAL				•
URINAL DIVIDER					

		BIDE					
							
		SIMFLEX	ECO	SANITARBLOCK	SANITARBLOCK	FREE-STANDING	EASY
		•	•	•	•		•
				•	•	•	•
							•
		•	•	•	•	•	
		•	•	•	•	•	
							
		•	•	•	•	•	
							
		•	•	•	•	•	
							
							•



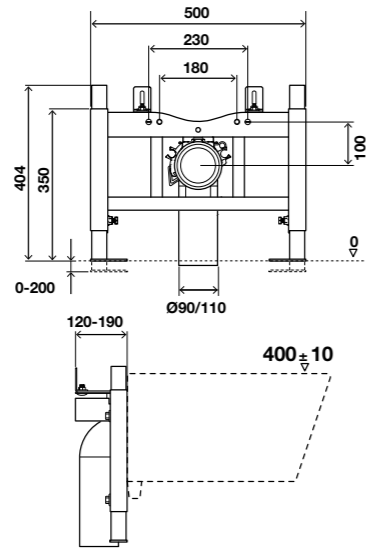

SPECIFIC FEATURES

- Compatible with wall-hung toilets;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 120mm thick.


INCLUDES

- Toilet fixing material;
- Frame fixing material;
- Outlet bend and Ø90/110 adaptor.



cod. 714001

CERAMIC SEPARATOR NEW

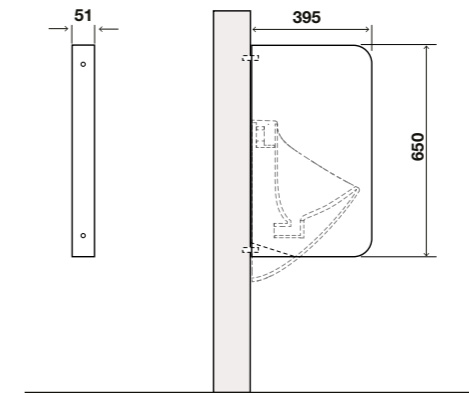

GENERAL FEATURES

- Material: Vitreous China;
- Hidden fixing;
- Shape: Rectangular;
- Compatible with the Easy structure.


INCLUDES

- Installation accessories.

cod. RE30100889764 White

cod. RE30100889765 Black

URINAL DIVIDER

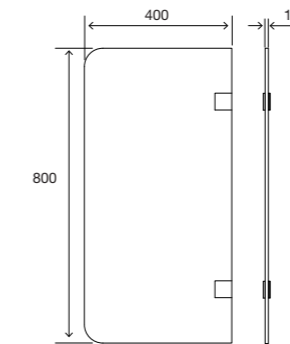


SPECIFIC FEATURES

- Frosted glass;
- Tempered Glass 8mm thick;
- Stainless steel fixing accessories;
- Fixation directly to the wall, drywall or Brick-wall;
- Compatible with Easy Structure.

INCLUDES

- Urinal divider fixing material.

cod. 000079

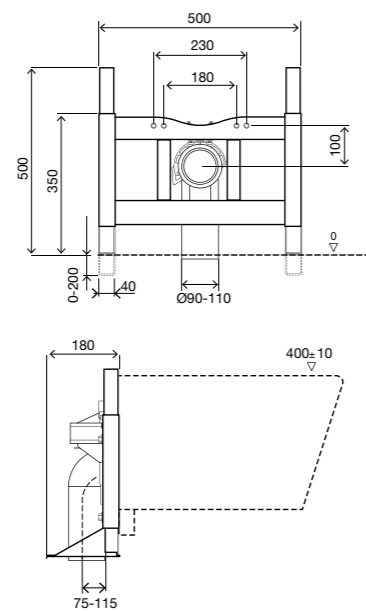

SPECIFIC FEATURES


- Compatible with wall-hung toilets;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 180mm thick.

INCLUDES

- Toilet fixing material;
- Frame fixing material (floor);
- Outlet bend and Ø90/110 adaptor.



cod. 616042

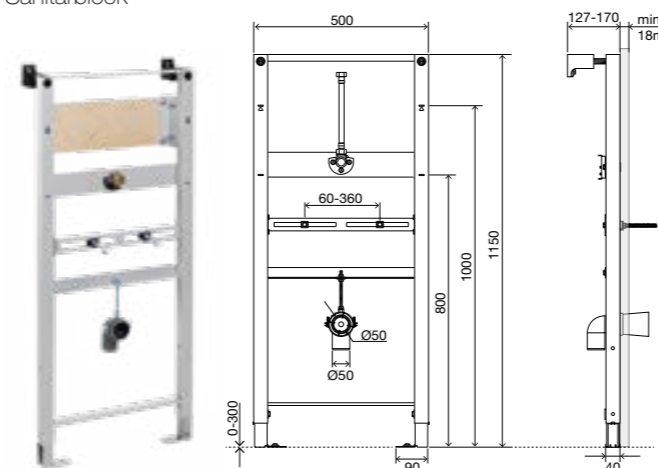

SPECIFIC FEATURES

- Frame for wall-hung urinals;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Frame tested for a 130kg load;
- Height adjustable from 0 to 200mm;
- Adjustable attachment plates;
- The flush valve has to be installed before closing the wall;
- One man assembly;
- Flush valve not included;
- 120mm thick.

INCLUDES


- Frame fixing material;
- Outlet bend Ø 50/50;
- G 1/2" fitting for tap connection (adjustable);
- 1/2" flexible hose.



cod. 136179

WC FRAME

Flush valve

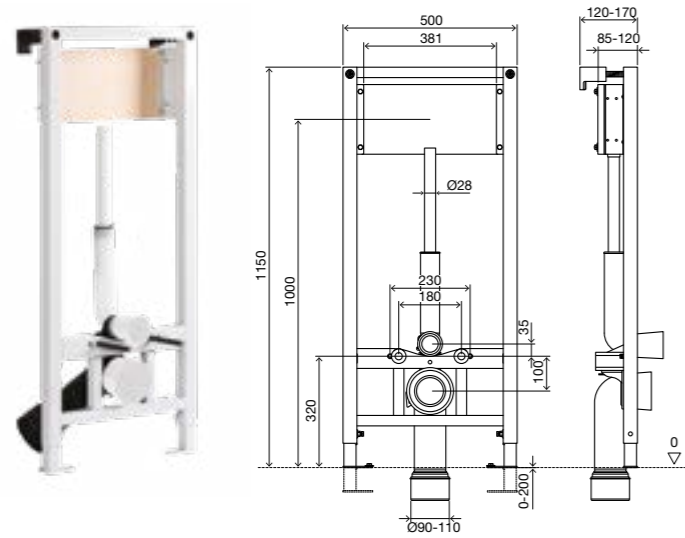

SPECIFIC FEATURES

- Compatible with wall-hung toilets;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Frame tested with 400kg load;
- Height adjustable from 0 to 200mm;
- Adjustable mounting plate;
- The has to be installed before closing the wall;
- Fluxometer not Included.


INCLUDES

- Toilet fixing material;
- Frame fixing material;
- Inlet and outlet toilet connection;
- Outlet bend and Ø90/110 adaptor.



cod. 880462

ECO WC/BIDET

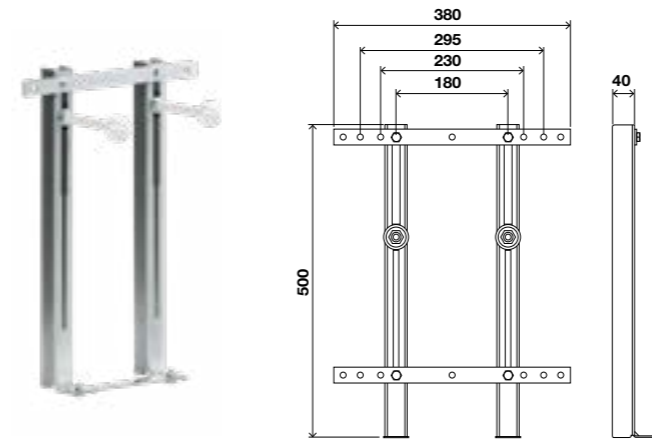

SPECIFIC FEATURES

- Frame for wall-hung toilet or bidet;
- Brick-wall installation;
- Galvanized frame;
- Adjustable in width.

INCLUDES


- Toilet/bidet fixing material;
- Frame fixing material.



cod. 883176

EASY

Sanitarblock

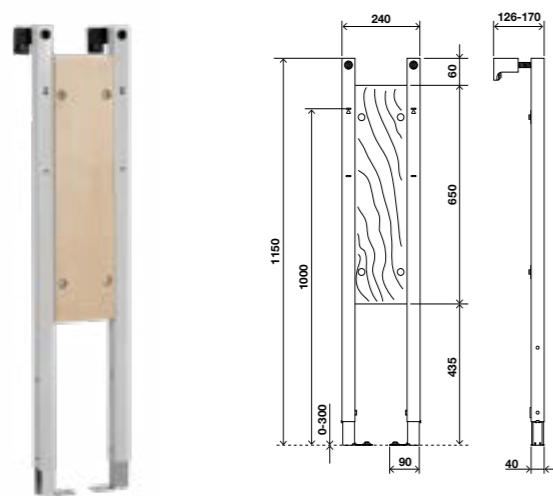

SPECIFIC FEATURES

- Frame for wall-hung urinal dividers;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Adjustable height from 0 to 200mm;
- Reinforced wood panel;
- One man assembly.

INCLUDES


- Frame fixing material.



cod. 032714

BIDET

Simflex

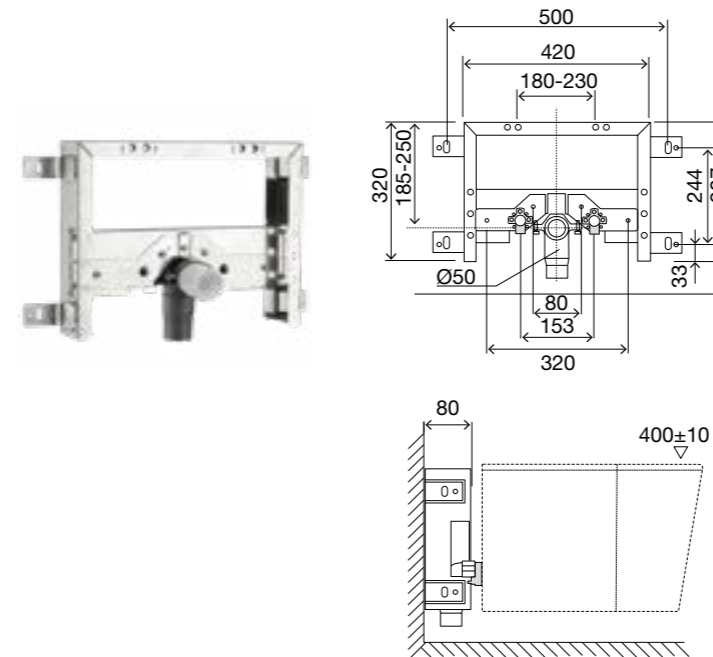

SPECIFIC FEATURES


- Frame for wall-hung toilet;
- Brick-wall installation;
- Galvanized frame;
- Adjustable attachment plate;
- 80mm thick.

INCLUDES


- Bidet fixing material;
- Frame fixing material;
- Outlet bend and Ø40/32-50.



cod. 610010

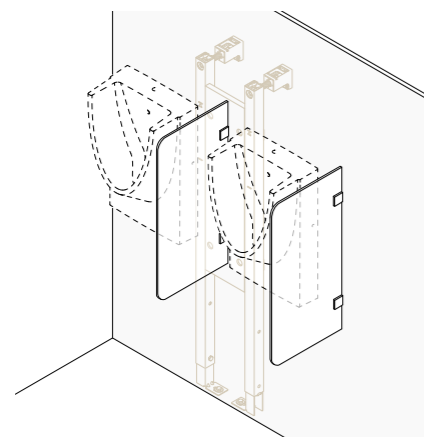

BIDET
Sanitarblock

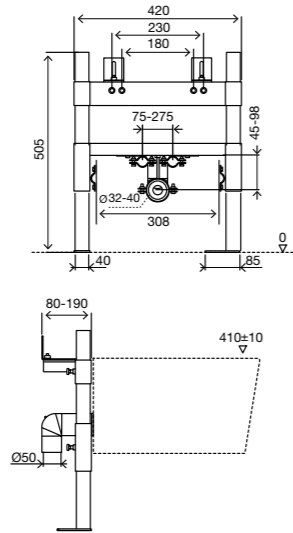

SPECIFIC FEATURES

- Frame for wall-hung bidet;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Adjustable attachment plates;
- 80mm thick.



INCLUDES

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø 40 32/50.



cod. **008908**

WASHBASIN
Simflex

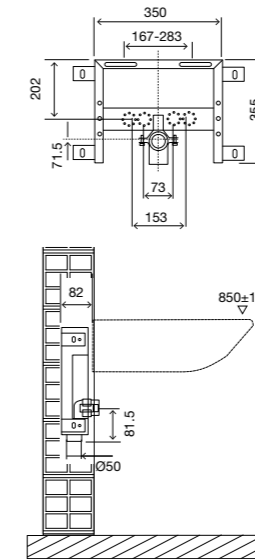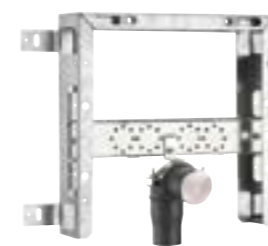

SPECIFIC FEATURES

- Frame for wall-hung washbasin;
- Brick-wall installation;
- Galvanized frame;
- Adjustable attachment plate;
- 80 mm thick.


INCLUDES

- Frame fixing material;
- Washbasin fixing material;
- Outlet bend Ø 40-32/50.



cod. **611011**

BIDET
Sanitarblock

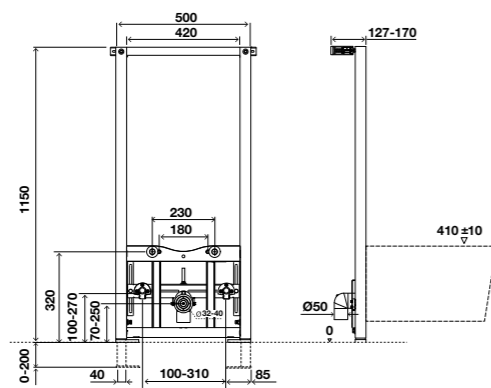

SPECIFIC FEATURES

- Frame for wall-hung bidet;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Frame tested for 400kg load;
- Height adjustable from 0 to 200mm;
- Adjustable mounting plates;
- 127mm thick.


INCLUDES

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø40mm 32/50mm;
- Two G ½ fittings for water connection.



cod. **136078**

WASHBASIN
Sanitarblock

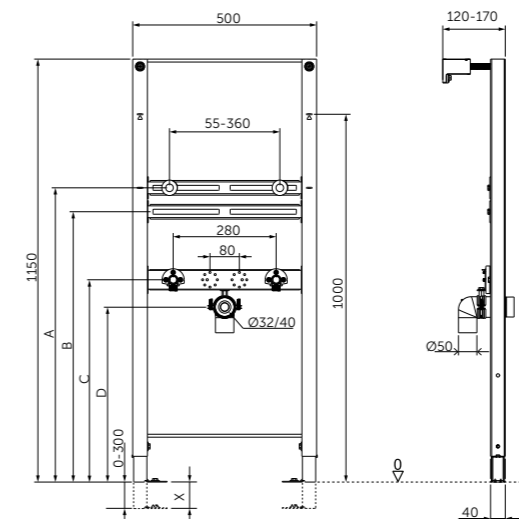

SPECIFIC FEATURES

- Frame for wall-hung washbasin;
- Brick wall or drywall installation;
- Easy and quick installation with Fast Fit system;
- Height adjustable from 0 to 300mm;
- Fully adjustable mounting plates;
- One man assembly;
- Frame tested for 150kg load;
- 120mm thick.

INCLUDES


- Washbasin fixing material;
- Frame fixing material;
- Outlet bend Ø40mm 32 / 50mm;
- Two G ½ fittings for water connection.



cod. **881857**

SHOWER FRAME

Sanitarblock

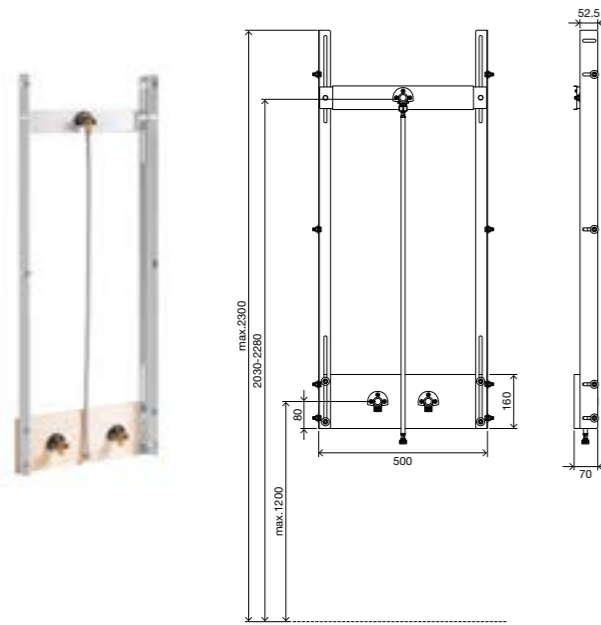

SPECIFIC FEATURES

- Frame for shower and taps;
- Brick-wall or drywall installation;
- 70mm thick;
- Height adjustable;
- Adjustable attachment plate.


INCLUDES

- 3 water connections F/M 1/2"x1/2" with seal and screws;
- Flexible tube F/Mx1/2";
- Frame fixing material.



cod. **880461**

CONCEALED SIPHON

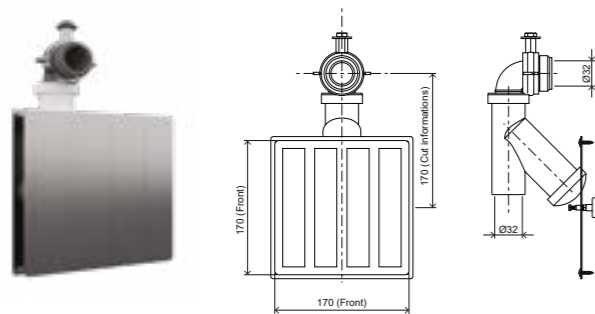

SPECIFIC FEATURES

- Hidden siphon for wall-hung washbasin;
- Hidden connections ø32;
- Concealed siphon guarantees the maintenance access through suction cups;
- Possibility to customize the stainless steel cover with the wall covering.

INCLUDES

- Stainless steel plate 170x170mm;
- Outlet bend Ø 32/32;
- 2 suction cups;
- 4 glue strips.

cod. **883081**

FRAME ACCESSORIES



- Toilet outlet bend for wall-hung toilets;
- Length:340mm;
- Exit Ø90;
- Toilet connection Ø90.

COD

622002

Wc outlet bend



- Toilet outlet bend for wall-hung toilets;
- Length: 300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD

036888

wc outlet bend Ø90x90



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection Toilet connection pipe Ø45x180;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection Toilet connection pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD

885108

Eccentric set connection 25mm



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110

FRAME ACCESSORIES



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD
885233 Bypass conector



- Accoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD
620071 Accoustic insulation for Wall-hung toilet and bidet



- Accoustic insulation in expanded polyethylene;
- Avoids direct contact between the washbasin and tile.

COD
620072 accoustic insulation washbasin



- Lenght: 300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD
108380 Horizontal outlet wc



- Flexible connection;
- Lenght: Min 220mm/ Max 570mm;
- Exit Ø90/110;
- Toilet connection Ø80/100.

COD
079929 Flexible outlet wc



- 2 protections set for sanitarblock frames.

COD
167288 Accoustic Insulation



- Compatible with all taps and urinal concealed flush valve;
- Adjustable mounting wood panel;
- Fixing material.

COD
881858 Wall tap/concealed flush valve













- Double outlet bend for wall-hung toilets with horizontal installation.

COD
622022 90/110
622023 110/110













PART NUMBER GUIDE FRAMES

	WC	BIDET	WASHBASIN	URINAL
 WC Sanitarblock	714001	-	-	-
 WC Free-standing	616042	-	-	-
 WC frame	880462	-	-	-
 Urinal Sanitarblock	-	-	-	136179
 Ceramic Urinal divider	-	-	-	RE30100889764 white RE30100889765 black
 Urinal divider	-	-	-	000079
 Easy frame structure	-	-	-	032714

									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
625x172x450	7.676	1	0	7.676	36	1.25	0.8	1.96	296.336
535x211x540	10.962	1	0	10.962	28	1.2	0.8	2.32	326.936
1180x140x530	12.462	1	0	12.462	20	1.2	0.8	2.35	269.24
1175x96x550	10.243	1	0	10.243	32	1.2	0.8	2.52	347.776
717x182x519	0	0	0	0	48	1.2	0.8	2.19	20
-	0.0	1	-	-	0	0.000	0.000	0.000	20
1200x65x260	1.255	1	0	1.255	48	1.2	0.8	1.37	80.24














PART NUMBER GUIDE FRAMES


	WC	BIDET	WASHBASIN	URINAL
Eco Wc/Bide 	883176		-	-
Bidet 	-	610010	-	-
Eco bidet 	-	008908	-	-
Bidet Sanitarblock 	-	136078	-	-
Washbasin Simflex 	-	-	611011	-
Washbasin Sanitarblock 	-	-	881857	-
Shower frame 	880461	-	-	-

									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
547x151x60	1.995	1	0	1.995	110	1.2	0.8	0.776	239.45
441x333x97	2.979	1	0	2.979	100	1.22	0.8	1.712	317.9
513x126x180	5.279	1	0	5.279	120	1.2	0.8	1.78	653.48
1175x96x550	10.538	1	0	10.538	24	1.2	0.8	1.81	272.912
-	0.0	1	-	0	0	0.000	0.000	0.000	20
1175x96x550	9.796	1	0	9.796	32	1.2	0.8	0	333.472
1200x65x260	4.37	1	0	4.37	48	1.2	0.8	1.37	229.76



VORONOI	121
LESS IS MORE	122
INO-X 02 / INO-X 06	123
KEY	124
OCEANIA	125
OCEANIA MIA	125
SLIM INOX	126
SLIM MATTE COLLECTION	127
SLIM	127
GLAM OLIPURE	128
GLAM	128
GLOBE	129
PLAIN	130
RIA START/STOP	130
METAL	130
RIA	131
TRUMPET	132
BLINK MATTE	133
BLINK	134
SM15	135
KARISMA	137
SALINA 2	137
OCEANIA	138
OCEANIA MIA	138
MINI TREND	139
MONO TREND	139
EASY DUAL	139
PNEUMATIC ACTUATOR FOOT OPERATED	141
PNEUMATIC ACTUATORFOOT OPERATED	141
SPHERA	142
PNEUMATIC ACTUATOR	142
PNEUMATIC ACTUATOR	142
ELECTRA III	143
KEY	145
HALLO	147
HALLO PRO	147
MOON	148
GLASSY	149
ELINE	150
BLINK URINAL	151
GLOBE URINAL	153
EAQUA URINAL	153

-  Mechanic actuation
-  Pneumatic actuation
-  Electronic actuation
-  Capacitive sensor
-  AC power-mains
-  Reduced mobility
-  Hydroboost
-  OLIpure
-  Anti-theft
-  Stop Fire
-  Single flush
-  Dual flush
-  100% Hygienic

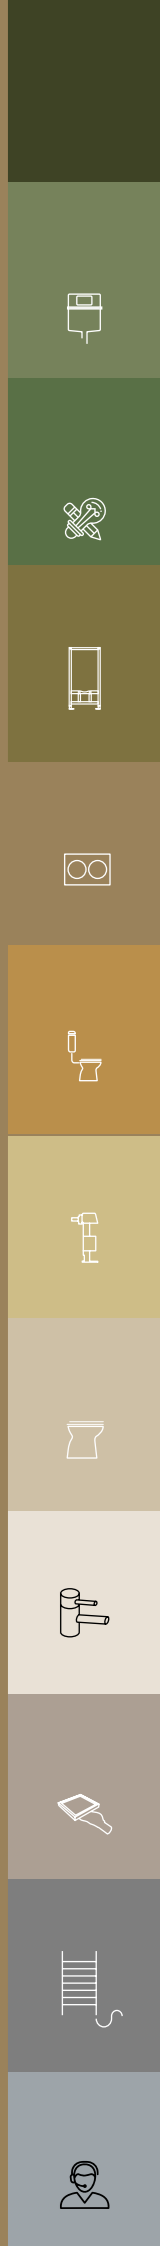

COMPATIBILITY MATRIX

FLUSH PLATES / IN-WALL CISTERNS

With a wide range of flush plates, OLI offers innovative solutions in terms of technology and design that are versatile for any bathroom. For the correct installation and operation of the product, we have identified the minimum height required for each cistern model.

	SOME VERSIONS COMPLIANT WITH	Mechanical VERSION											PNEUMATIC VERSION					ELECTRONIC VERSION							
		LESS IS MORE	GLOBE	SLIM	OCEANIA	INO-X	GLAM	PLAIN	METAL	RIA	KEY	VORANOI	TRUMPET	OCEANIA	BLINK	SM15	KARISMA	SALINA 2	MOON	GLASSY	eLINE	ELECTRA III	KEY	HALLO	
OLI170 PLUS		10mm	0mm	15mm	-	-	10mm	0mm	10mm	10mm	15mm														
OLI174 PLUS	WaterMark, SABS, WRAS, kiwa	5mm	0mm	15mm	0mm	0mm	with OLIPURE 0mm without OLIPURE 0mm	0mm	0mm	5mm	5mm														
OLI120 PLUS	WRAS, NF, DELGARDIA, kiwa, SINTEP	10mm	10mm	15mm	-	-	with OLIPURE 20mm without OLIPURE 25mm	10mm	15mm	10mm	15mm														
QUADRA PLUS	NF	15mm	5mm	15mm	15mm	15mm	10mm	10mm	0mm	5mm	-														
OLI180	DELGARDIA	-	0mm	15mm	-	-	-	0mm	0mm	0mm	10mm														
EXPERT PLUS	Top	-	* 0mm	0mm	-	-	* 0mm	* 0mm	0mm	0mm	5mm														
	Front	WaterMark	5mm	0mm	0mm	-	-	0mm	* 0mm	0mm	0mm														

FLUSH PLATE

MECHANICAL VERSION

LESS IS MORE



883526 White
883524 Polished chrome
883525 Brushed
883527 Black
888573 Gold

KEY



889101 Polished chrome
890120 Black matte

VORONOI



890370 Burnt Terra
890364 Black Dark Carbon
890371 Organic Gold
890367 Arabic Stone
890368 Urban Concrete
890351 White Pure Glacier
890369 Forest Terra
890372 Raw Umber

OCEANIA



054564 Stainless steel - Brushed
054554 Glass White
054557 Glass Black
054558 Stainless steel button - glass White
054562 Stainless steel button - glass Black
054561 Stainless steel - Polished chrome
882412 Stainless steel Gold

OCEANIA MIA



054563 Mech (customizable)

SLIM



659041 White
659044 Polished chrome
659046 Matte chrome
659056 Black matte
659042 White matte
659058 Grey matte

METAL



656004 Polished chrome
656006 Matte chrome

SLIM INOX




057141 Inox
889313 Inox Gun Metal
889312 Copper
888565 Inox Gold Plated
888561 White Gold Plated

INO-X




660002 INO - X 02 Polished chrome
661006 INO - X 06 Brushed

GLOBE




152949 White
885464 White Antibacterial
152950 Polished chrome
152951 Matte chrome
152952 Black soft-touch
152954 Gold plated
152953 Grey soft-touch

GLAM OLPure



139178 White OLPure Antibacterial
139179 Polished chrome OLPure
139180 Matte chrome OLPure
139181 Black soft-touch OLPure

GLAM



139184 White
885578 Antibacterial
139185 Polished chrome
139186 Matte chrome
139187 Black soft-touch

PLAIN



070826 White
070827 Polished chrome
070828 Matte chrome
070829 Black soft-touch

RIA



010230 White
640584 Polished chrome
640586 Matte chrome
640591 White Antibacterial


PNEUMATIC VERSION

TRUMPET



046199 Polished chrome
046198 Brushed
883245 Gold plated
878783 White Gold plated
887609 Copper

BLINK



216622 White
154963 Polished chrome
093399 Brushed
882567 Gun Metal
878490 Black
883246 Gold plated
878781 White Gold plated
887610 Copper

BLINK matte



889873 Brushed Gold matte
889872 Brushed white gold matte
889874 Brushed copper matte
889875 Brushed matte
889871 Brushed Gun Metal matte

SM15



022238 White tempered glass

OCEANIA



054988 Stainless steel - Brushed
054989 Glass White
054992 Glass Black
054993 Stainless steel button - glass White
054996 Stainless steel button - glass Black
054998 Stainless steel - Polished chrome

OCEANIA MIA




054997 Pneu (customizable)

KARISMA



641001 White
641004 Polished chrome
641006 Matte chrome
641015 Black soft-touch

SALINA 2



890376 White
890416 Polished chrome
890417 Matte chrome
890375 Black matte

ELECTRONIC VERSION

MOON



878848 White
878981 Black

GLASSY



878849 White
878850 Black
878702 Anthracite
878701 Taupe

HALLO




889349 White
889350 Black

eLINE



880876 Brushed
883585 Brushed Radio and Bluetooth

ELECTRA III



079206 Polished chrome zamac

KEY



889102 Polished chrome Electronic/Mechanics
890121 Black matte Electronic/Mechanics

URINAL

eAQUA urinal



879120 Inox AC
879119 Inox BATT

BLINK urinal



882264 Polished chrome

GLOBE urinal



878466 White
885580 White Antibacterial
878818 Polished chrome
878819 Matt chrome
878822 Gold plated




VORONOI
Mechanical flush plate



Burnt Terra



Black Dark Carbon



Organic Gold




Arabic Stone



Urban Concrete



White Pure Glacier




Forest Terra



Raw Umber



- cod. **890351** White Pure Glacier
- cod. **890364** Black Dark Carbon
- cod. **890367** Arabic Stone
- cod. **890368** Urban Concrete
- cod. **890369** Forest Terra
- cod. **890370** Burnt Terra
- cod. **890371** Organic Gold
- cod. **890372** Raw Umber

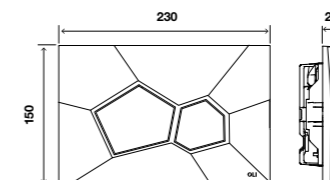


GENERAL FEATURES

- Mechanical actuation;
- Commitment to sustainability;
- Made from Biobased ABS;
- Mechanical actuation;
- Actuation force <20 N;
- Multiple finishes.

OLI's Voronoi flush plate is a celebration of design inspired by polygonal shapes, bringing the fluid, organic geometry of the Voronoi pattern into the bathroom. Its two-dimensional and faceted form, gives it a unique design and a sculptural presence that transcends functionality, making it a standout element in contemporary architectural projects.


More than a functional object, Voronoi reflects a commitment to sustainability. Made from biobased ABS, it uses recycled raw materials from biological sources, significantly reducing its environmental impact. This material, besides its sustainable feature, offers a smooth, high-quality finish that makes it easy to clean and preserves visual sophistication. Its exhaustive and detailed development process enables this piece to use 20 per cent less raw material and guarantees the same resistance, making it a statement of innovation and sustainability.

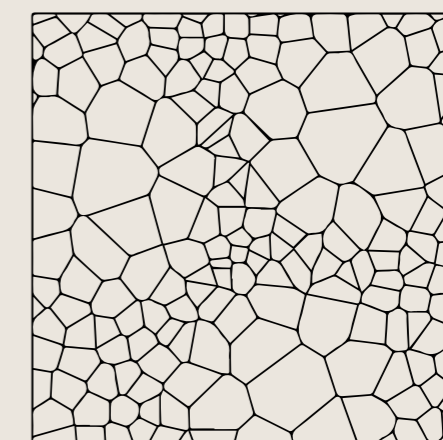



LESS IS MORE

Mechanical flush plate

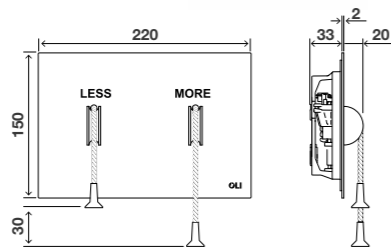

GENERAL FEATURES


- Design by Architect Alessio Pinto;
- Mechanical actuation;
- Stainless steel material;
- Nylon cords on grey;
- Mechanical actuation;
- Front application;
- Low actuation force <17 N;
- 2mm thick.



- cod. **883527** Black
- cod. **883525** Brushed
- cod. **883524** Polished chrome
- cod. **883526** White
- cod. **888573** Gold

INO-X 02 / INO-X 06

Mechanical flush plate

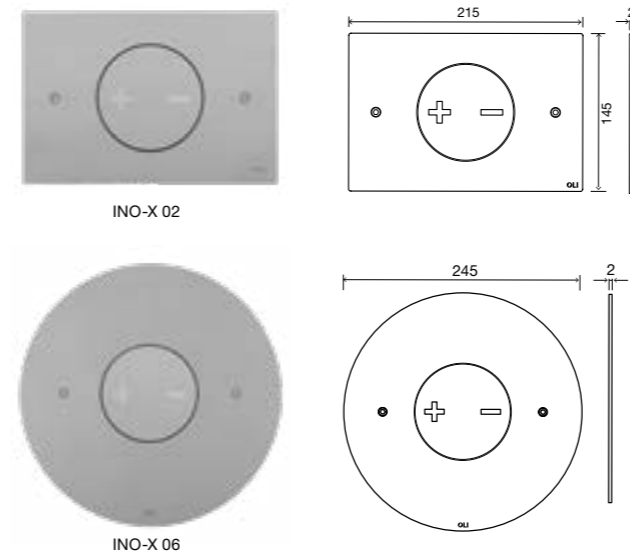

GENERAL FEATURES

- Designed by Architect Romano Adolini;
- Stainless steel material;
- Mechanical actuation;
- Actuation force < 20 N;
- Tiltable button;
- Anti-theft;
- 2mm thick.



- cod. **660002** Polished chrome
- cod. **661006** Brushed



ALESSIO PINTO

Alessio Pinto architect designed this amazing flush plate. Born in Rome on the 12th of July 1968, Alessio Pinto architect states:

"At a glance we realise the meaning of Plus and Minus. All it takes is viewing the cords as analogue signs"

Alessio Pinto



ROMANO ADOLINI


The Ino-x flush plate collection was designed by Romano Adolini, an Italian architect and designer who is an influential figure in bathroom design.

"A simple sheet of steel that is only 2mm thick cut with a precise laser".

Romano Adolini



KEY NEW
Mechanical flush plate

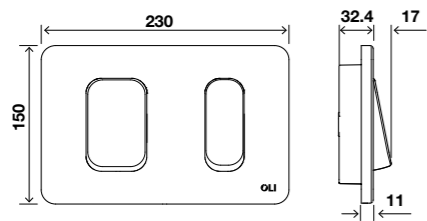

- cod. **889101** Mechanic Stainless steel brushed
- cod. **890120** Mechanic black matte



GENERAL FEATURES

- Dual flush;
- Mechanical actuation;
- Material: Brushed stainless steel;
- Finish: Brushed and PVD black matte;
- High resistance to impact and scratches;
- 11mm thick (front);
- Safe and inclusive actuation;
- Safe and inclusive system;
- Suitable for public spaces*.



Public spaces

OCEANIA
Mechanical flush plate

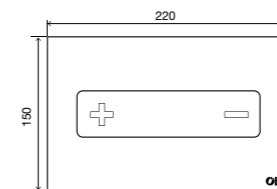

- cod. **054557** Glass black
- cod. **054554** Glass white
- cod. **054564** Stainless steel brushed
- cod. **054561** Stainless steel polished chrome
- cod. **054562** Stainless steel button glass Black
- cod. **054558** Stainless steel button glass White
- cod. **882412** Stainless steel gold



GENERAL FEATURES

- Stainless steel or tempered glass material;
- Mechanical actuation;
- Actuation force < 20 N;
- Tilttable button;
- Anti-theft;
- Different combinations of materials and finishes;
- 4mm thick (steel);
- 6mm thick (glass).

Note: Only compatible with OLI74 PLUS and QUADRA PLUS



OCEANIA MIA
Mechanical flush plate

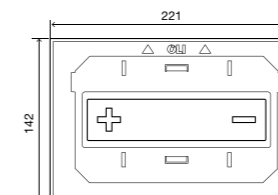

- cod. **054563** mech (customizable)

GENERAL FEATURES


- Customizable flush plate;
- 10mm material thick for the finishing;
- Stainless steel frame;
- Different finishing possibilities;
- Mechanic actuation;
- Actuation force < 20 N;
- Tilttable button;
- Anti-theft;
- 12mm thick.





SLIM INOX

Mechanical flush plate

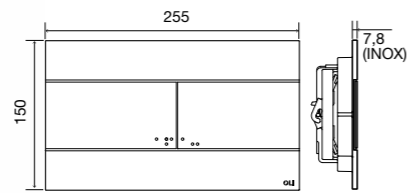

GENERAL FEATURES

- Dual flush;
- Mechanical actuation;
- Material: ABS coated with brushed stainless steel;
- Available in PVD finishes;
- High resistance to impact and scratches;
- Actuation force: < 20 N;
- 7.8mm thick;
- Suitable for public spaces*.



Public spaces



- cod. **888565** Gold plated
- cod. **888561** White gold plated
- cod. **889312** Copper
- cod. **889313** Gun metal
- cod. **057141** Inox

SLIM MATTE COLLECTION

Mechanical flush plate



GENERAL FEATURES


- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick.



- cod. **659056** Black matte
- cod. **659058** Grey matte
- cod. **659042** White matte

SLIM

Mechanical flush plate

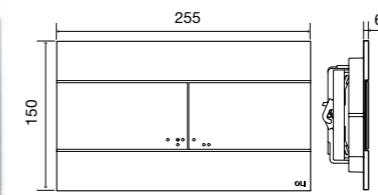

GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick.



- cod. **659046** Matte chrome
- cod. **659044** Polished chrome
- cod. **659041** White

ANTI-THEFT LOCKER*



- Compatible with the SLIM INOX flush plate;
- It makes the flush plate more resistant to theft;
- Ideal for application in public spaces.




- cod. **883640** Anti-theft locker




GLAM OLIpure

Mechanical flush plate

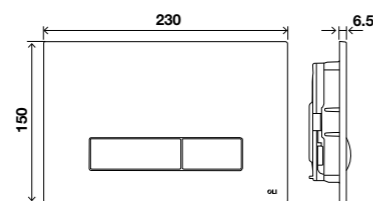

- cod. **139181** Black soft-touch OLIpure
- cod. **139180** Matte chrome OLIpure
- cod. **139179** Polished chrome OLIpure
- cod. **139178** White OLIpure Antibacterial

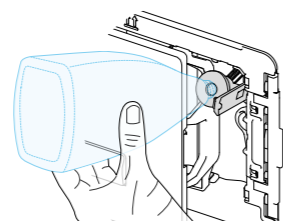

GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- OLIpure* compatible version;
- Actuation force < 20 N;
- 6.5mm thick;
- Antibacterial finish available.
- Opening and closing of the front plate by a click system on the side.

* AmbiWave liquid is sold separately.




OLIPURE IS A CLOSED STORAGE SYSTEM THAT WITH EACH FLUSH RELEASES A CONTROLLED AMOUNT OF CLEANER INTO THE TOILET.

This reduces the risk of the disinfectant damaging components in the cistern.

GLAM

Mechanical flush plate

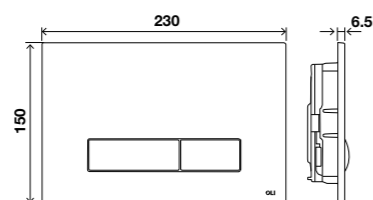

- cod. **139187** Black soft-touch
- cod. **139186** Matte chrome
- cod. **139185** Polished chrome
- cod. **139184** White
- cod. **885578** White Antibacterial

GENERAL FEATURES


- ABS: high resistance to scratches;
- Mechanical actuation;
- OLIpure* compatible version;
- Actuation force < 20 N;
- 6.5mm thick;
- Antibacterial finish available;
- Opening and closing of the front plate by a click system on the side.

* AmbiWave liquid is sold separately.



GLOBE

Mechanical flush plate

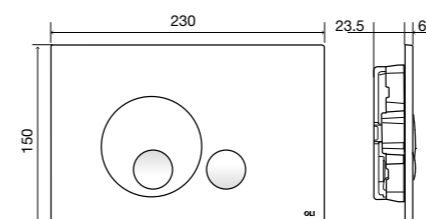

- cod. **152952** Black soft-touch
- cod. **152954** Gold plated
- cod. **152953** Grey soft-touch
- cod. **152951** Matte chrome
- cod. **152950** Polished chrome
- cod. **152949** White
- cod. **885464** White antibacterial

GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Antibacterial finish available.




COMBINATION



PLAIN

Mechanical flush plate

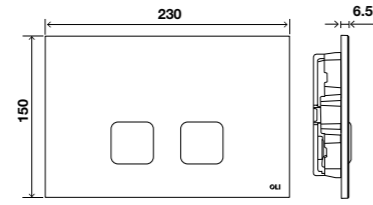

GENERAL FEATURES


- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing of the front plate by a click system on the side.



- cod. **070829** Black soft-touch
- cod. **070828** Matte chrome
- cod. **070827** Polished chrome
- cod. **070826** White

RIA START/STOP

Mechanical flush plate

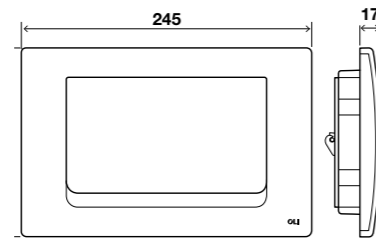



GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- Single flush;
- Actuation force < 20 N;
- 17mm thick.

- cod. **010234** White

METAL

Mechanical flush plate

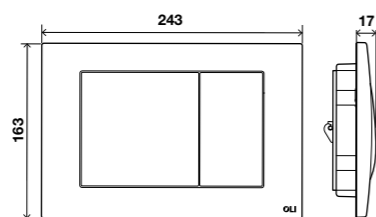

GENERAL FEATURES

- Zamac material;
- Mechanical actuation;
- Actuation force < 20 N;
- Anti-theft;
- 17mm thick.




- cod. **656006** Matte chrome
- cod. **656004** Polished chrome



RIA

Mechanical flush plate

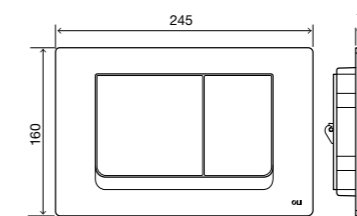

GENERAL FEATURES

- ABS: high resistance to scratches;
- Antibacterial finish available;
- Mechanical actuation;
- Dual flush;
- Actuation force < 20 N;
- 17mm thick.



- cod. **640586** Matte chrome
- cod. **640584** Polished chrome
- cod. **640591** White Antibacterial
- cod. **010230** White

BATHROOMS WITH ANTIBACTERIAL SURFACES

There are various bacteria that can be found when a toilet is flushed. These microscopic particles carry bacteria such as E coli, Salmonella and Staphylococcus aureus. All of these can cause symptoms such as diarrhoea and stomach pains.

OLI has developed a version of flush plates that responds to the concern of protecting any bathroom against the proliferation of bacteria.




"ABS raw material + treatment with antimicrobial activity (> 99.99%)", according to the German laboratory QualityLabs BT.

HIGH PERFORMANCE

The tests, conducted and supervised in accordance with the ISO 22196 standard, were carried out by the German laboratory QualityLabs BT.



TRUMPET
Pneumatic flush plate

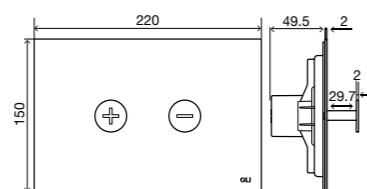

GENERAL FEATURES


- Designed by Architect Siza Vieira;
- Stainless steel material;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick.



- cod. **883245** Gold plated
- cod. **878783** White gold plated
- cod. **887609** Copper
- cod. **046198** Brushed
- cod. **046199** Polished chrome



BLINK
Pneumatic flush plate

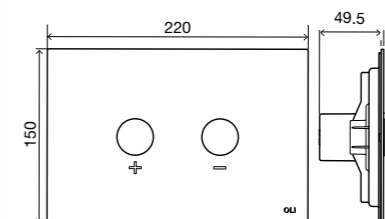

GENERAL FEATURES

- Dual flush;
- Pneumatic actuation;
- Material: Stainless steel;
- Finish: Brushed and PVD with varnish;
- Anti-fingerprint (front);
- Buttons with radial effect;
- Actuation force: < 20 N;
- 2mm thick.



- cod. **889875** Brushed matte
- cod. **889873** Brushed gold matte
- cod. **889872** Brushed white gold matte
- cod. **889874** Brushed copper matte
- cod. **889871** Brushed gun metal matte



**THE PERFECT COMBINATION OF
MATTE AND GLOSS, WITHOUT
LEAVING MARKS**




ÁLVARO SIZA

"I am very pleased with the prestigious "Best of Category 2016" award for the Trumpet flush plate. The quality achieved is due to the competent and committed contribution of the technicians at OLI. It was a pleasure to evolve the design of the flush plate with them."

Álvaro Siza



BLINK
Pneumatic flush plate

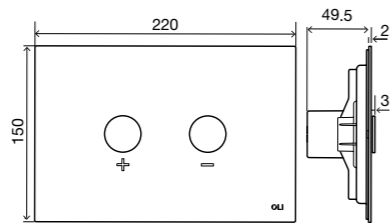

GENERAL FEATURES

- Stainless steel material;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick.




- cod. **883246** Gold plated
- cod. **878490** Black
- cod. **887610** Copper
- cod. **093399** Brushed
- cod. **154963** Polished chrome
- cod. **216622** White
- cod. **878781** White Gold plated
- cod. **882567** Gun Metal



COMBINATION



SM15
Pneumatic flush plate

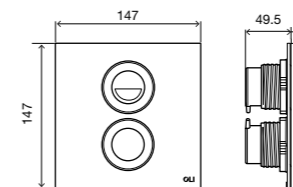

GENERAL FEATURES

- Designed by Architect Souto de Moura;
- White tempered glass material;
- Installation in the surface wall with 150x150mm tiles;
- Pneumatic actuation;
- Actuation force <20N;
- 5mm thick.



- cod. **022238** White tempered glass

COMBINATION




SOUTO DE MOURA

Souto de Moura is a renowned Portuguese architect who has been presented with various international awards, such as, the Gold Medal of Heinrich Tessenow Foundation in 2001; the Pritzker Award in 2011; the Wolf Prize of Arts in 2013; just to name a few.



NEW DESIGN ABS FLUSH PLATES

KARISMA NEW
Pneumatic flush plate

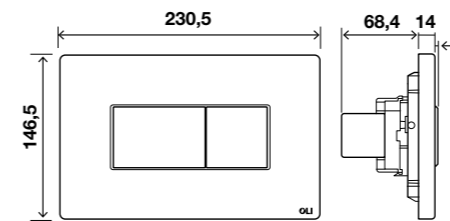


- cod. **641006** Matte chrome
- cod. **641004** Polished chrome
- cod. **641001** White
- cod. **641015** Black soft-touch

GENERAL FEATURES

- Dual flush;
- Pneumatic actuation;
- Material: ABS (high resistance to scratches);
- Actuation force: < 20 N;
- 14mm thick.



SALINA 2 NEW
Pneumatic flush plate

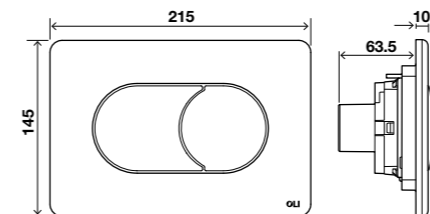

- cod. **890375** Black Matte
- cod. **890376** White chrome
- cod. **890417** Matte chrome
- cod. **890416** Polished chrome


GENERAL FEATURES

- ABS: high resistance to scratches;
- Pneumatic actuation;
- Actuation force < 20 N;
- 10mm thick.



OCEANIA

Pneumatic flush plate

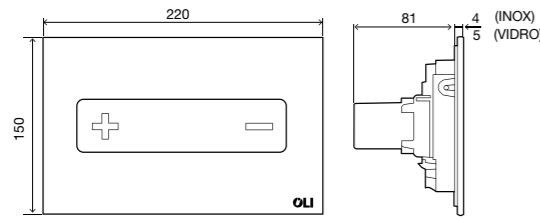

- cod. **054992** Glass Black
- cod. **054989** Glass White
- cod. **054988** Stainless steel Brushed
- cod. **054996** Stainless steel glass Black
- cod. **054993** Stainless steel glass White
- cod. **054998** Stainless steel Polished chrome

GENERAL FEATURES


- Stainless steel or tempered glass material;
- Pneumatic actuation;
- Actuation force < 20 N;
- Tilttable button;
- "Gull wing" opening system;
- Anti-theft;
- Different finishing possibilities and combinations:
- 4mm thick (steel);
- 6mm thick (glass).

Note: Compatible with all in-wall cisterns except OLI80.



MINI TREND*

Pneumatic flush plate

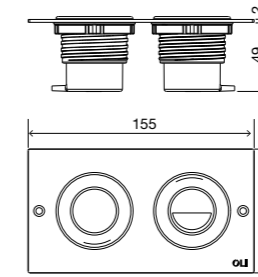

cod. **605294** Polished chrome


GENERAL FEATURES

- Polished chrome stainless steel material;
- Pneumatic actuation;
- For drywall installations;
- Anti-theft;
- Pneumatic connectors supplied;
- An inspection plate should be applied to ensure the access to the cistern*;
- 2mm thick.



MONO TREND*

Pneumatic flush plate



cod. **605254** Polished chrome


GENERAL FEATURES

- Polished chrome stainless steel material;
- Single flush;
- Pneumatic actuation;
- For drywall installations;
- Anti-theft;
- An inspection plate should be applied to ensure the access to the cistern*;
- 2mm thick.



OCEANIA MIA

Pneumatic flush plate

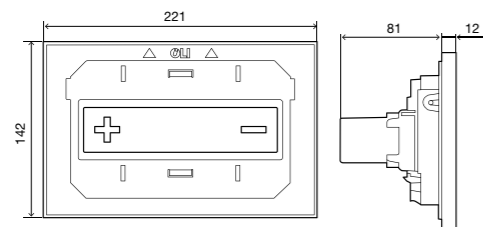

cod. **054997** Pneumatic

GENERAL FEATURES


- Customizable flush plate;
- 10mm material thick for the finishing;
- Stainless steel frame;
- Finished in any material as long as it is 10mm thick;
- Pneumatic actuation;
- Actuation force < 20 N;
- Tilttable button;
- Anti-theft;
- 12mm thick.

Note: compatible with all in-wall cisterns except OLI80.



EASY DUAL

Pneumatic flush plate

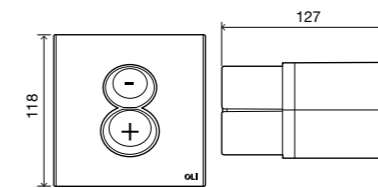

cod. **011640** White

GENERAL FEATURES

- ABS: high resistance to scratches;
- Pneumatic actuation;
- Anti-theft;
- Adjustable buttons: 0mm, 18mm or 32mm;
- Compliant with safety regulations against fire (ERP) Article CO 31.




* Not meant to be used in the opening of the in-wall cistern. An inspection plate (see page 155) should be applied to ensure access to the cistern. Pre-installation necessary.



PNEUMATIC ACTUATOR FOOT OPERATED *



Pneumatic flush plate

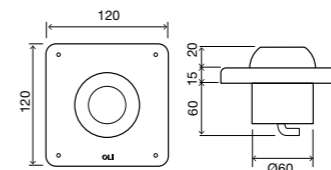

cod. **605201** Brushed

GENERAL FEATURES


- Stainless steel material;
- Floor installation;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- Anti-sliding push button;
- Anti-theft;
- 35mm thick.

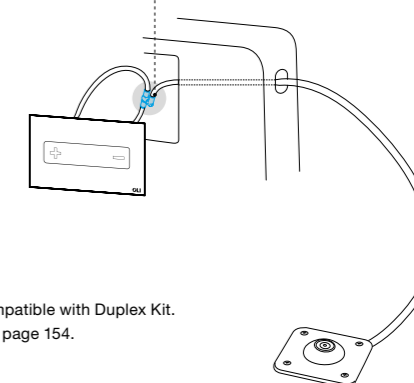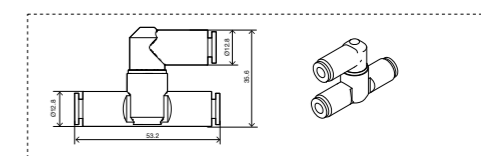

Compatible with Duplex Kit.
See page 154.

PNEUMATIC ACTUATOR FOOT OPERATED *

Pneumatic flush plate

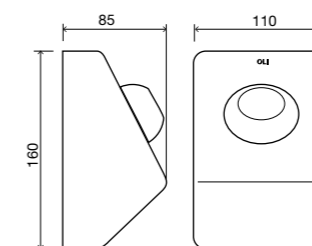

cod. **605301** Brushed


GENERAL FEATURES

- Stainless steel material;
- Wall installation;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- Anti-sliding push button;
- Anti-theft;
- 85mm thick.



SPHERA*


Pneumatic flush plate

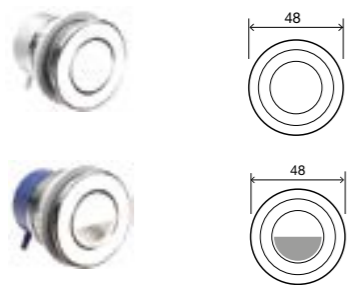

cod. **605274** SPHERA -
cod. **605264** SPHERA +


GENERAL FEATURES

- Polished chrome ABS material;
- Single flush;
- Pneumatic actuation;
- For drywall installations;
- An inspection plate should be applied to ensure the access to the cistern*;
- 20mm thick.

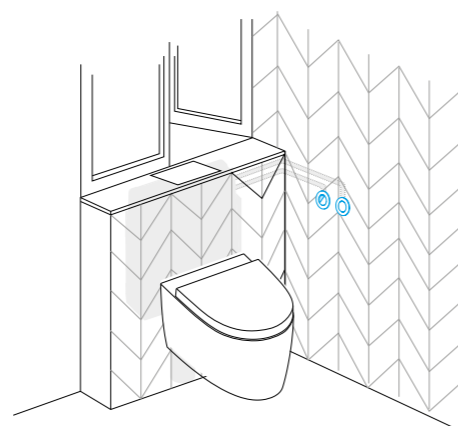

PNEUMATIC ACTUATOR*

In-wall salient pneumatic button

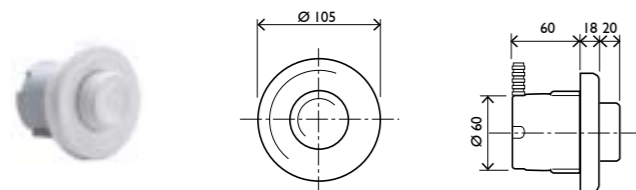

cod. **718063** White


GENERAL FEATURES

- White ABS material;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- 38mm thick.



ELECTRA III

Electronic/mechanical flush plate

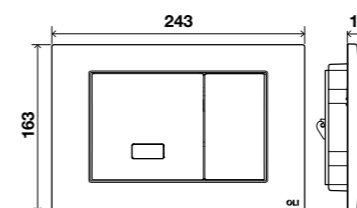

cod. **079206** Polished chrome zamac

GENERAL FEATURES


- Polished chrome Zamac material;
- Dual flush (<60s half flush; >60s full flush);
- Infrared sensor or mechanical actuation;
- Compatible with electronic in-wall cisterns;
- Electric power connection (adaptor 230V/12V not Included);
- Anti-theft;
- 17mm thick.

Note: Compatible with mechanical cistern + electronic conversion kit.



PNEUMATIC ACTUATOR*

In-wall pneumatic push button

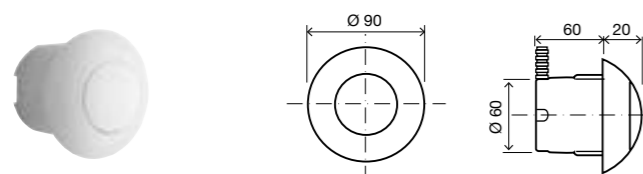

cod. **605001** White
cod. **605004** Polished chrome


GENERAL FEATURES

- White ABS material;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- 20mm thick.





KEY NEW
 Mechanical / Electronic flush plate

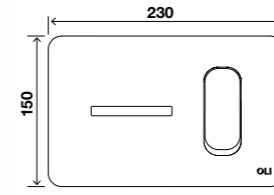

	Recetor Bluetooth
REMOTE CONTROL*	•

* Accessories not included. See page 154.

- cod. **889102** Electronic/Mechanic Stainless steel brushed
- cod. **890121** Electronic/Mechanic black Matte

GENERAL FEATURES

- Automatic dual flush;
- Possibility of changing to Single flush;
- Electronic actuation: infrared sensor;
- Sensor detection distance up to 900mm;
- Material: Brushed stainless steel;
- Finish: Brushed and PVD black matte;
- Power supply: AC;
- Anti-fingerprint (front);
- Configurable hygienic flushing via APP in Bluetooth version (OFF 24h from factory);
- Configurable pre-flush (factory OFF);
- Anti-theft;
- "Gull-Wing" opening system;
- 11mm thick (front);
- Suitable for public spaces*.

The Bluetooth version allows you to calibrate the motor, monitor flushes and change the main settings.
 Note: Compatible with AC version cisterns or mechanical cisterns + AC conversion kit.




DOWNLOAD THE OLI IR APP





HALLO ^{NEW}

Electronic flush plate

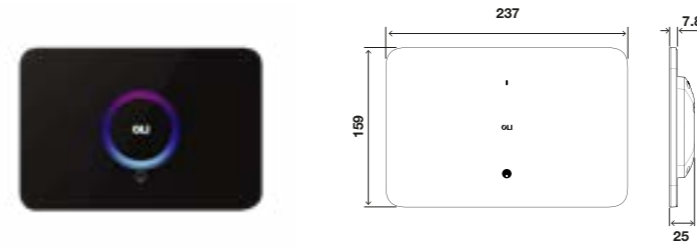

- cod. **889349** White
- cod. **889350** Black
- cod. **889351** Power supply HALLO

GENERAL FEATURES

- Dual flush;
- Material: Corner gorilla glass;
- Precise user detection via 2 'TOF (time of flight) sensors;
- No-touch flushing control;
- Mobile app, personalisation and statistics;
- Bluetooth communication;
- 7.2mm thick;
- Power supply not included;
- AC connection source.

Note: compatible only with OLI120 plus.



CONNECTIVITY AND MONITORING VIA THE OLI CONNECT APP

Google Play App Store

With direct access to utilisation and performance data, users can control their flushes simply and efficiently. It guarantees maximum performance and minimises water consumption. Control via the OLI CONNECT app enables greater efficiency and facilitates daily management.

HALLO PRO ^{NEW}

- cod. **890096** Lake white with sensor
- cod. **890097** Lake black with sensor



GENERAL FEATURES

- Ambient lighting under the toilet;
- Usage detection, sensorised toilet;
- Eliminates false flushes;
- Water savings of up to +50%;
- Stopping blockages;
- Flood prevention;
- Mobile app, personalisation and statistics.

Note: compatible only with OLI120 plus.

INCLUDES

- LAKE toilet with sensor;
- Seat & cover;
- Power supply included.




PERFECT COMBINATION OF ELECTRONIC FLUSH PLATE AND TOILET





MOON
No-touch flush plate

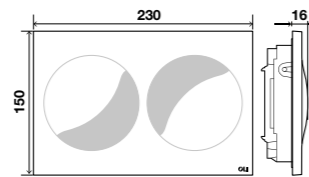

GENERAL FEATURES


- One-piece in white or black ceramic material;
- No-touch actuation through capacitive sensors;
- Hygienic and easy to clean;
- Compatible with Hydroboost or AC system;
- Anti-error electronic connections;
- Waterproof connectors;
- 16mm thick.

*Note: It is necessary to purchase a cistern with Hydroboost actuation (mechanical cistern + Hydroboost conversion kit).



- cod. **878981** Black
- cod. **878848** White

GLASSY
Electronic flush plate

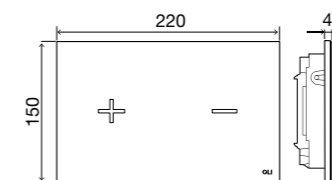


- cod. **878702** Anthracite
- cod. **878850** Black
- cod. **878701** Taupe
- cod. **878849** White

GENERAL FEATURES

- One-piece tempered glass;
- No-Touch actuation through capacitive sensors with led signs, multiple colours available;
- Hygienic and easy to clean;
- Compatible with Hydroboost or AC system;
- Anti-error electronic connections;
- Waterproof connectors;
- 4mm thick.


*Note: It is necessary to purchase a cistern with Hydroboost actuation (mechanical cistern + Hydroboost conversion kit).

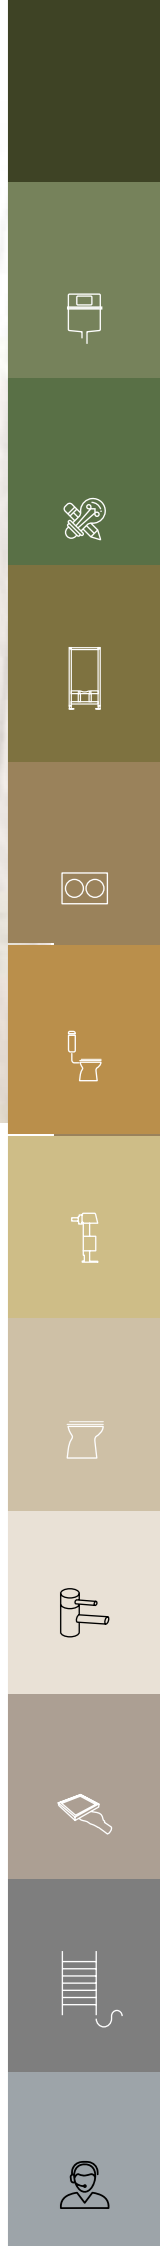




BLINK Urinal

Mechanical flush plate

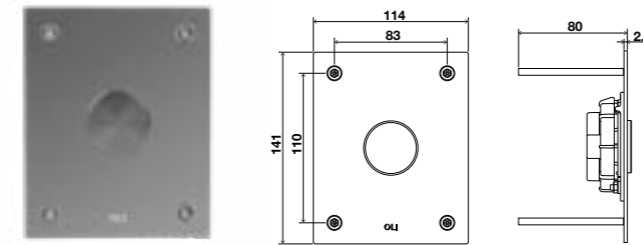

GENERAL FEATURES

- Stainless steel flush plate;
- Single flush;
- Mechanically actuated urinal plate for flush valve;
- Anti-theft;
- TORX security screws (+bit);
- The flush valve has to be installed before closing the wall;
- Compatible with URINAL Sanitarblock and OLI120 Double Frame wc/urinal/washbasin;
- 2.5mm thick.

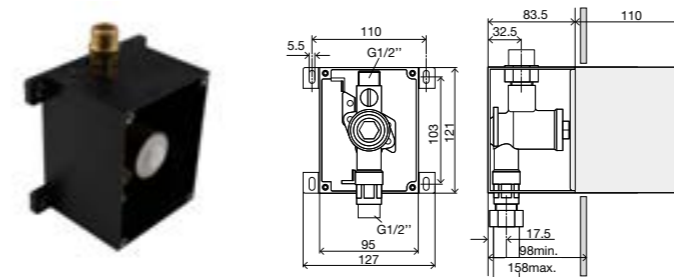

The concealed pre-installation box must be installed before the finished wall phase.


- cod. **882264** Polished chrome
- cod. **883087** Concealed pre installation

CONCEALED PRE-INSTALLATION SOLD SEPARATELY

- Adjustable flow;
- Flow pressure: 0.8 – 5 bar;
- Flow rate: 0.3 l/s;
- G 1/2" water connection;
- Protection cover 110mm;
- Pre-assembled water path with isolating valve;
- Sealing plug.

eLINE

Electronic flush plate

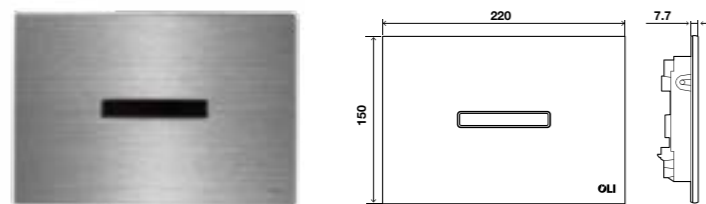

SAME DESIGN, TWO VERSIONS



	Bluetooth receiver	Radio receiver	Radio remote control
ELINE STANDARD*	•		
ELINE RÁDIO*		•	•

* Accesories not Included. See page 154.

- cod. **880876** Brushed
- cod. **883585** Brushed Radio and Bluetooth


GENERAL FEATURES

- Brushed stainless steel material;
- Automatic dual flush;
- Electronic actuation: infrared sensor;
- Compatible with ac in-wall cisterns;
- Electric power connection (adaptor 240V/7V not Included);
- Configurable hygienic discharge;
- Configurable pre-discharge;
- Infrared sensor with detection up to 900mm;
- Bluetooth version allows a statistical record of discharges;
- Radio version allows a remote actuation;
- Anti-theft;
- 8mm thick.
- The Bluetooth version allows you to calibrate the motor, monitor flushes and change the main settings;
- Radio version allows remote operation, via a remote control.

Note: Compatible with AC version cisterns or mechanical cisterns + AC conversion kit.



COMBINATION


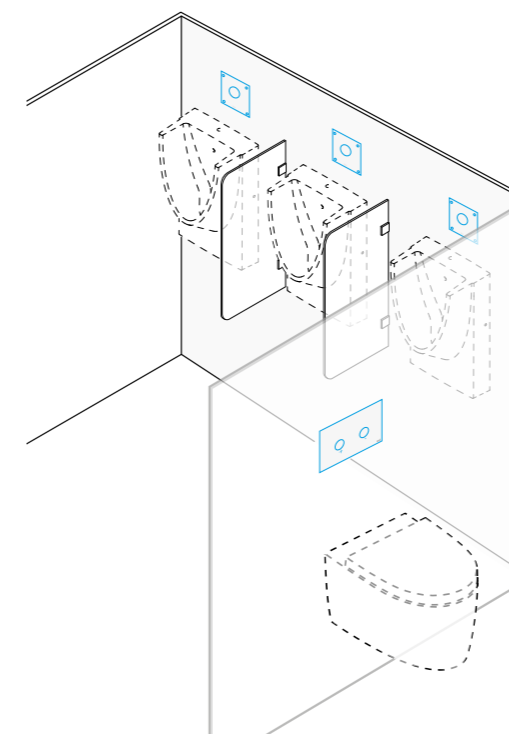


COMBINATION



GLOBE Urinal

Mechanical flush plate

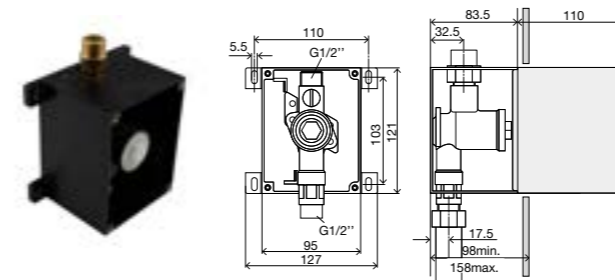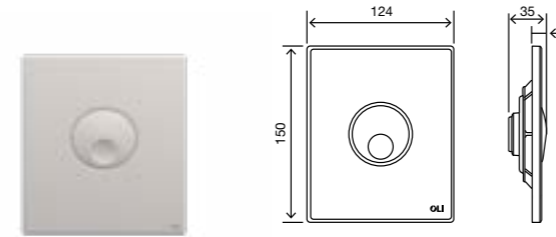

The concealed pre-installation box must be installed before the finished wall phase.

- cod. **878822** Gold plated
- cod. **878819** Matte chrome
- cod. **878818** Polished chrome
- cod. **878466** White
- cod. **885580** White Antibacterial
- cod. **883087** Concealed pre installation

GENERAL FEATURES

- ABS: high resistance to scratches;
- Single flush;
- Mechanically actuated urinal plate for flush valve;
- Anti-theft;
- The flush valve has to be installed before closing the wall;
- Compatible with URINAL Sanitarblock and OLI120 Double Frame wc/urinal/washbasin;
- 12mm thick.

CONCEALED PRE-INSTALLATION SOLD SEPARATELY

- Adjustable flow;
- Flow pressure: 0.8 – 5 bar;
- Flow rate: 0.3 l/s;
- G 1/2" water connection;
- Protection cover 110mm;
- Pre-assembled water path with isolating valve;
- Sealing plug.





COMBINATION



eAQUA Urinal

Electronic flush plate

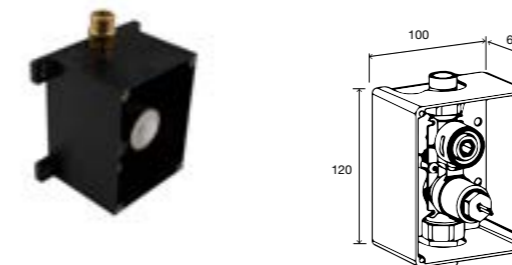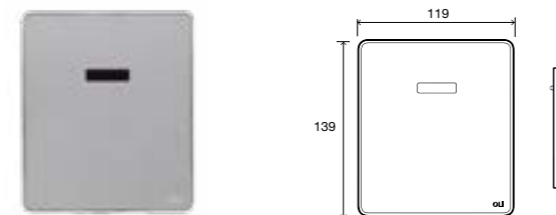

The concealed pre-installation box must be installed before the finished wall phase.

- cod. **879120** eAQUA URINAL Inox AC
- cod. **879119** eAQUA URINAL Inox BATT
- cod. **879123** Urinal concealed pre installation

GENERAL FEATURES

- Brushed stainless-steel;
- Dual flush infrared sensors (with automatic setting feature);
- Cleaning system (factory off);
- Touch-activated short discharge;
- Flush time and sensor sensitivity adjustable with touch;
- 24h/48h hygienic flush and pre-flush activation with touch;
- Compatible with URINAL Sanitarblock and Double Frame wc/urinal/washbasin;
- Anti-theft;
- 6mm thick.

CONCEALED PRE-INSTALLATION SOLD SEPARATELY

- Operating pressure: 0.3-10 bar;
- Flow rate: ca. 20 l/min. (3 bar);
- 6V Lithium CRP 2 (standard: life time up to 4 years) / mains power supply 230V/6V;
- Standards: DIN EN 200;
- CE marking.



COMBINATION



ACCESSORIES FLUSH PLATES



- Protection pipe 1.8m for pneumatic connections.

COD
049544 Protection pipe



- Pneumatic pipes x2;
- 3m each.

COD
043234 Pneumatic pipes 3M



- 2 points of actuation on the same cistern;
- Only for pneumatic flush plates;
- Single flush;
- Compatible with pneumatic systems OLI74 PLUS, OLI120 PLUS, EXPERT PLUS or QUADRA PLUS).

COD
216252 Kit Duplex



- Radio remote control;
- Dual flush;
- Capacitive buttons;
- 2 AAA batteries included.

COD
884193 Remote control



- Radio receptor control;
- Flushing by remote control.

COD
883578 Radio receptor



- Statistical record of discharges;
- App interaction;
- Easy and useful service for facility managers.

COD
883582 eLINE bluetooth receptor




- Input: 100-240 V AC;
- Frequency: 50/60Hz;
- Output: 7 V DC 3A;
- For AC flush plate (MOON, GLASSY, eLINE and KEY).

COD
878674 Power supply eline



- Input: 100-240 V AC;
- Frequency: 50/60Hz;
- Output: 12 V DC 1,5A;
- For use with Electra III.

COD
079260 Power supply



- Input: 100-240V AC;
- Frequency: 50/60Hz;
- Output: 12 V DC;
- Installation for HALLO flush plate;
- Extensible cables up to 260cm.

COD
889351 Power supplyflush plate



- Inspection plate;
- Stainless steel material;
- Customize with your preferred finish;
- Compatible with pneumatic in-wall cisterns;
- Anti-theft;
- 0.5mm thick.

COD
880390 Inspection plate SEAMLESS Brushed





- Inspection plate;
- Stainless steel material;
- Compatible with pneumatic in-wall cisterns;
- Anti-theft;
- 2mm thick.

COD
207893 Inspection plate inox Brushed

207892 Inspection plate inox Chrome

PART NUMBER GUIDE

	White	Black	Anthracite	Gold	White Gold	Taupe	Polished chrome	Brushed	Copper	Gun Metal	Grey soft-touch	Black soft-touch
 Mechanic												
KEY	-	890120 matte	-	-	-	-	-	889101	-	-	-	-
LESS is MORE	883526	883527	-	-	-	-	883524	883525	-	-	-	-
INO-X 02	-	-	-	-	-	-	660002	661002	-	-	-	-
INO-X 06	-	-	-	-	-	-	660006	661006	-	-	-	-
OCEANIA	054558 steel button 054554 glass	054562 steel button 054557 glass	-	-	-	-	054561	054564	-	-	-	-
OCEANIA MIA	054563	-	-	-	-	-	-	-	-	-	-	-
GLOBE	152949	-	-	152954	-	-	152950	152951	-	-	152953	152952
SLIM	659041	-	-	154962	-	-	659044	659046	-	-	010216	659055
GLAM	139184	-	-	-	-	-	139185	139186	-	-	-	139187
PLAIN	070826	-	-	-	-	-	070827	070828	-	-	-	070829
RIA	010230 640591 antibacterial	-	-	-	-	-	640584	640586	-	-	-	-
RIA STOP	010234	-	-	-	-	-	010244	-	-	-	-	-
METAL	-	-	-	-	-	-	011418	656006	-	-	-	-

 Pneumatic												
TRUMPET	-	-	-	-	878783	-	046199	046198	878784	-	-	-
OCEANIA	054993 steel button 054989 glass	054996 steel button 054992 glass	-	-	-	-	054998	054988	-	-	-	-
OCEANIA MIA	054997	-	-	-	-	-	-	-	-	-	-	-
BLINK	216622	878490	-	883246 889873 matte	878781 889872 matte	-	154963	093399 889875 matte	887610 889874 matte	882567 889871 matte	-	-
SM15	022238	-	-	-	-	-	-	-	-	-	-	-
KARISMA	641001	-	-	-	-	-	641004	641006	-	-	-	641015
SALINA 2	890376	890375	-	-	-	-	890416	890417	-	-	-	-
EASY DUAL	011640	-	-	-	-	-	-	-	-	-	-	-
MONO TREND	-	-	-	-	-	-	-	23506	-	-	-	-
SPHERA+	-	-	-	-	-	-	605264	-	-	-	-	-
SPHERA-	-	-	-	-	-	-	605274	-	-	-	-	-
PNEUMATIC HAND	605001	-	-	-	-	-	605004	-	-	-	-	-
PNEUMATIC SALIENT HAND	718063	-	-	-	-	-	-	-	-	-	-	-
ACTUATOR FOOT FLOOR	-	-	-	-	-	-	-	605201	-	-	-	-

WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
255x179x120	0.715	16	595x391x500	12	320	1.2	0.8	2.645	230
252x178x109	0.978	16	595x391x500	15.648	320	1.2	0.8	2.66	332.96
-	0.0	1	-	-	0	1.200	0.800	0.000	20
-	0.0	1	-	-	0	1.200	0.800	0.000	20
252x178x109	0.844	16	595x391x500	13.504	320	1.2	0.8	2.66	290.08
266x190x55	0.323	34	595x391x500	10.982	680	1.2	0.8	2.66	239.64
266x190x55	0.4	34	595x391x500	14	680	1.200	0.800	2.660	284.2
266x190x55	0.386	34	595x391x500	13.124	680	1.2	0.8	2.66	282.48
266x190x55	0.341	34	595x391x500	11.594	680	1.2	0.8	2.66	251.88
266x190x55	0.328	34	595x391x500	11.152	680	1.2	0.8	2.66	243.04
266x190x55	0.415	34	595x391x500	14.11	680	1.2	0.8	2.66	302.2
270x190x52	0.43	22	540x330x392	9.46	550	1.2	0.87	2.12	256.5
266x190x55	1.055	14	595x391x250	14.77	560	1.2	0.8	2.66	610.8

252x178x109	0.577	16	595x391x500	9.232	320	1.2	0.8	2.66	204.64
252x178x109	0.886	16	595x391x500	14.176	320	1.2	0.8	2.66	303.52
252x178x109	0.765	16	595x391x500	12.24	320	1.2	0.8	2.66	264.8
240x162x90	0.764	28	595x391x500	21.392	560	1.2	0.8	2.66	447.84
461x161x71	1.024	8	485x351x345	8.192	192	1.2	1	1.54	216.608
260x180x97	0.449	20	595x391x500	8.98	400	1.2	0.8	2.66	199.6
260x180x97	0.449	20	595x391x500	8.98	400	1.2	0.8	2.66	199.6
230X200X120	0.99	10	595x391x500	9.9	200	1.2	1	1.9	218
260x180x97	0.457	20	595x391x500	9.14	400	1.2	0.8	2.66	202.8
260x180x97	0.377	20	595x391x500	7.54	320	1.2	0.8	1.66	140.64
260x180x97	0.376	20	595x391x500	7.52	320	1.2	0.8	1.66	140.32
260x180x97	0.406	20	595x391x500	8.12	400	1.2	1	2.16	182.4
0	0	0	0	0	0	0	0	0	20
0	0	0	0	0	0	0	0	0	20

PART NUMBER GUIDE

	White	Black	Anthracite	Gold	White Gold	Taupe	Polished chrome	Brushed	Copper	Gun Metal	Grey soft-touch	Black soft-touch
ACTUATOR FOOT WALL	-	-	-	-	-	-	-	605301	-	-	-	-
SEAMLESS	-	-	-	-	-	-	-	880390	-	-	-	-
INSPECTION PLATE	-	-	-	-	-	-	207892	207893	-	-	-	-



Electronic

KEY	-	-	-	-	-	-	-	889102	-	-	-	-
HALLO	889349	889350	-	-	-	-	-	-	-	-	-	-
MOON	878848	878981	-	-	-	-	-	-	-	-	-	-
GLASSY	878849	878850	878702	-	-	878701	-	-	-	-	-	-
eLINE	-	-	-	-	-	-	-	880876 883585 Radio and bluetooth	-	-	-	-
ELECTRA III	-	-	-	-	-	-	079206	-	-	-	-	-



Urinal

BLINK URINAL	-	-	-	-	-	-	Blink 882264	-	-	-	-	-
EAQUA URINAL	-	-	-	-	-	-	883087 Concealed pre-instal- lation	-	-	-	-	-
GLOBE URINAL	878466 883087 Concealed pre-instal- lation	-	-	878822 883087 Concealed pre-instal- lation	-	-	878818 883087 Concealed pre-instal- lation	878819 883087 Concealed pre-instal- lation	-	-	-	-



OLIpure

GLAM	139178	-	-	-	-	-	139179	139186	-	-	-	139181
------	--------	---	---	---	---	---	--------	--------	---	---	---	--------



Anti-theft

SLIM INOX	-	-	-	-	-	-	-	057141	-	-	-	-
METAL	-	-	-	-	-	-	011418	656006	-	-	-	-

	White Pure Glacier	Black Dark Carbon	Arabic Stone	Urban Concrete	F Forest Terra	F Burnt Terra	Organic Gold	Raw Umber
VORONOI	890351	890364	890367	890368	890369	890370	890371	890372

0	0	0	0	0	0	0	0	0	20
266x190x55	0.456	34	595x391x500	15.504	680	1.2	0.8	2.66	330.08
266x190x55	0.657	34	595x391x500	22.338	680	1.2	0.8	2.66	466.76

255x179x120	0.715	12	595x391x500	9	240	1.2	0.8	2.645	172
290x185x147	1.2	8	598x388x320	11.1	96	1.2	0.8	1.1	135
252x178x109	1.347	16	595x391x500	21.552	320	1.2	0.8	2.66	451.04
252x178x109	1.015	16	595x391x500	16.24	320	1.2	0.8	2.66	344.8
260x180x97	0.895	8	595x391x250	7.16	256	1.2	0.8	2.32	249.12
0	0	0	0	0	0	0	0	0	20

266x190x55	0.627	14	595x391x250	8.778	448	1.2	0.8	2.16	300.896
261x187x114	0.799	16	595x391x500	12.784	320	1.2	0.8	2.66	275.68
0	0	0	0	0	240	1.2	0.8	2.66	20
266x190x55	0.299	14	595x391x250	4.186	448	1.2	0.8	2.16	153.952

266x190x55	0.37	34	595x391x500	12.58	680	1.2	0.8	2.66	271.6
------------	------	----	-------------	-------	-----	-----	-----	------	-------


266x190x55	0.509	14	595x391x250	7.126	560	1.2	0.8	2.66	305.04
266x190x55	1.039	14	595x391x250	14.546	560	1.2	0.8	2.66	601.84

266x190x55	0.323	34	595x391x500	10.982	680	1.2	0.8	2.66	239.64



ECO.OPALA	164
QUARZO	165
ONIX PLUS	166
SMERALDO	166
TOPAZIO DD	167
ZAFFIRO DD	167
OLISTYLE	168
TOPAZIO	169
TURCHESE	169

-  Dual flush
-  Single flush
-  Start/Stop flush
-  Close coupled position
-  Medium-low position
-  High position
-  Saves up to 9l of water per day
-  OLIpure System
-  Anti-condensation

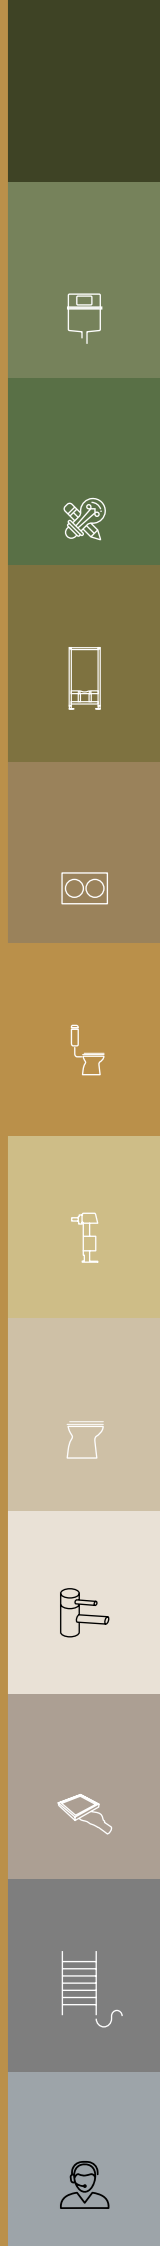

RANGE

NEW

ECO.OPALA

QUARZO

SMERALDO

TOPAZIO DD

ONIX PLUS

ZAFFIRO

TURCHESE

TOPAZIO

OLISTYLE



DUAL FLUSH

• • • • •



SINGLE FLUSH

•



START/STOP

•



MEDIUM-LOW POSITION

• • • •



CLOSE COUPLED POSITION

•



HIGH POSITION

•



OLIPURE

•



PLUS SYSTEM

• • • •



ANTI-CONDENSATION

• • • •

•

•

•

•

•

•

•



ECO.OPALA
Medium-low Position



The first OLI's exposed cistern with 99% recycled polystyrene raw material.

SPECIFIC FEATURES

- Dual flush 6/3 litres;
- 99% recycled polystyrene raw material;
- Colour: black;
- 140mm thick;
- Equipped with PLUS inlet valve (delayed and silent opening);
- Class 1 and NF certified;
- Anti-condensation and acoustic insulation;
- Adjustable wall fixing system (compatible with existing fixings);
- Mains water connection, 3/8" brass, from the left, right or back *;
- All the accessories required for installation are supplied.


* To connect the water in the back position, it is necessary to purchase a flexible or elbow connection.

INCLUDES

- Flush pipe Ø50/40;
- Wall fixing accessories;
- Toilet connection seal.



cod. **889680** Black

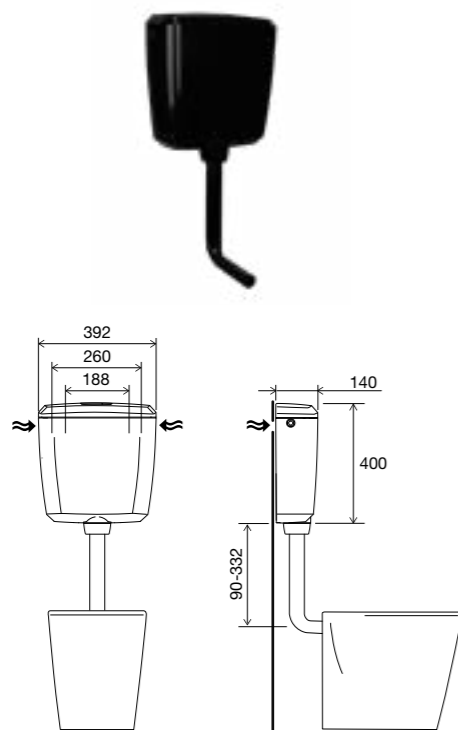

The measurements shown are in millimeters

QUARZO
Medium-low Position

OLIPURE*
the best solution for a perfect hygiene in the bathroom.

Internal system that pumps cleaning liquid in each flush. This way the cleaning liquid is always in a closed circuit, unlike traditional cleaning tablets that are always in contact with water, causing possible damages to components in the cistern.

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 9/4L in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections three positions**;
- EN 14055 CE marking;
- White PS material;
- 145mm thick.

** To connect the water in the back position it is necessary to purchase a flexible or elbow connection.


INCLUDES

- Flush pipe Ø50/40;
- Wall fixation accessories;
- Toilet connection rubber seal.



* We recommend using chlorine-free liquid detergents with a viscosity between 150 and 300 cp (at 20°C). cp stands for "centipoise", a unit of measurement for viscosity.



cod. **124427** White
cod. **154961** OLipure White

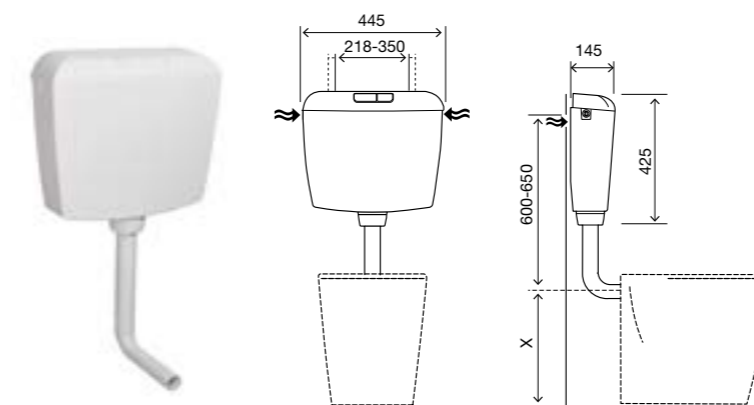

The measurements shown are in millimeters

ONIX PLUS

Medium-low/Close coupled application

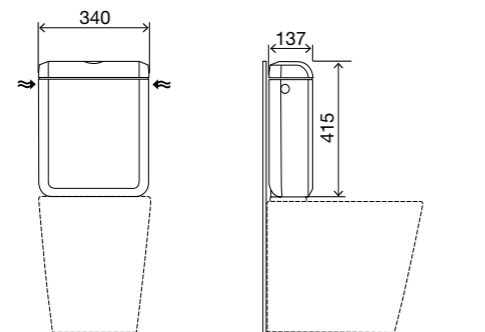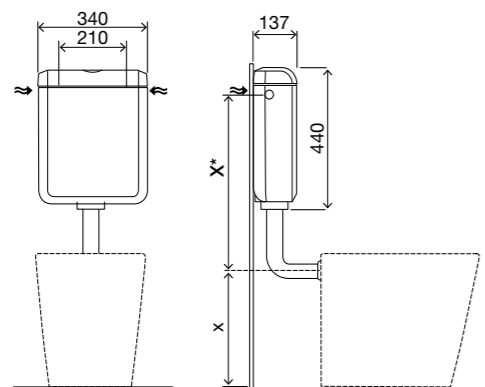

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 4/2L in the outlet valve);
- Medium installation or close couple;
- Acoustic and anti-condensation internal lining;
- Delayed refilling inlet valve;
- Silent inlet valve;
- Water supply connections Three positions;
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- White PS material;
- 137mm thick.

* To connect the water in the back position, it is necessary to purchase a flexible or elbow connection

INCLUDES


- Close couple fixation kit;
- Flush pipe Ø50/40 for medium level installation;
- Wall fixation accessories;
- Toilet connection rubber seal.



cod. **340221** Medium-low/Close coupled application

TOPAZIO DD

Medium-low Position

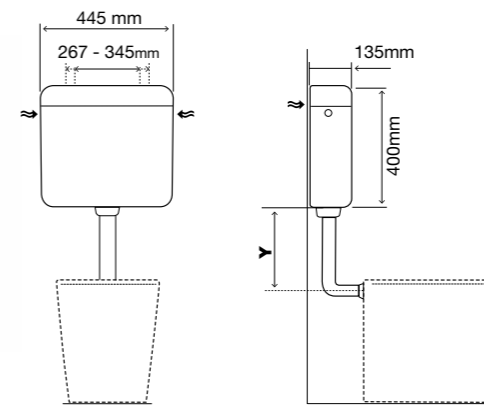

Y
Ø40 MIN 90 MAX 332

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 9/4L in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections Three positions;
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- White PS material;
- 135mm thick.

INCLUDES


- Flush pipe Ø50/40;
- Wall fixation accessories;
- Toilet connection rubber seal.



cod. **416201** With 1/2" stop valve

SMERALDO

Medium-low Position

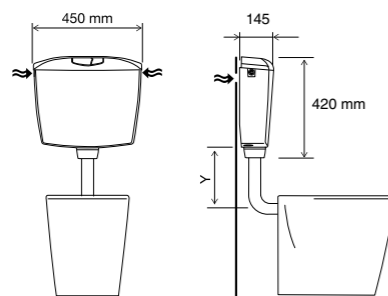

Y
Ø40 MIN 90 MAX 332

SPECIFIC FEATURES

- Dual flush 6/3L;
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections three positions;
- EN 14055 CE marking;
- White PS material;
- 145mm thick;
- 1/2" plastic connection.

INCLUDES


- Flush pipe Ø50/40;
- Wall fixation accessories;
- Toilet connection rubber seal.



cod. **012220** Medium-low position

ZAFFIRO DD

Close-coupled

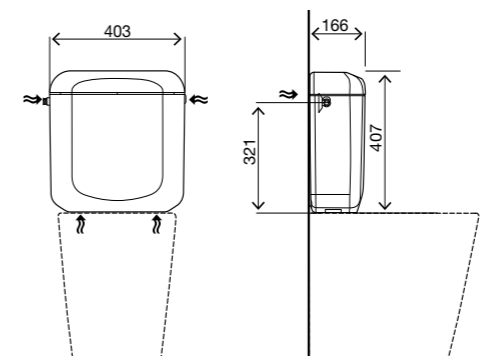

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 9/4L in the outlet valve);
- Close couple installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Water supply connections three positions;
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- White PS material;
- 166mm thick.

INCLUDES

- Close-couple fixation kit.




cod. **002426** bottom connection
cod. **425201** side connection
with 1/2" stop valve



TOPAZIO

High position

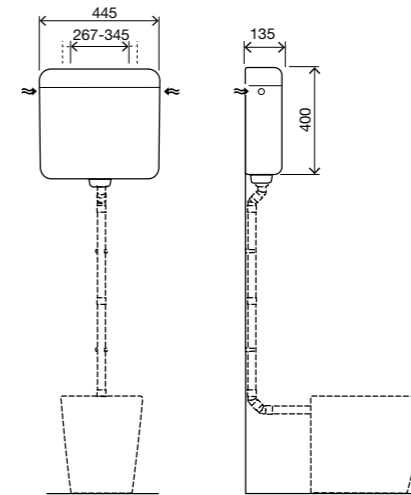

SPECIFIC FEATURES

- High level exposed tank with single flush 9L (adjustable to 6L in the inlet valve);
- Actuation in the Lid push button or pneumatic button (pneumatic push buttons page 142);
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- 135mm thick;
- Adjustable wall fixation system;
- Water supply connections Three positions;
- EN 14055 CE marking;
- White PS material.


INCLUDES

- Wall fixation accessories.

cod. **413781** High position

OLISTYLE

High position

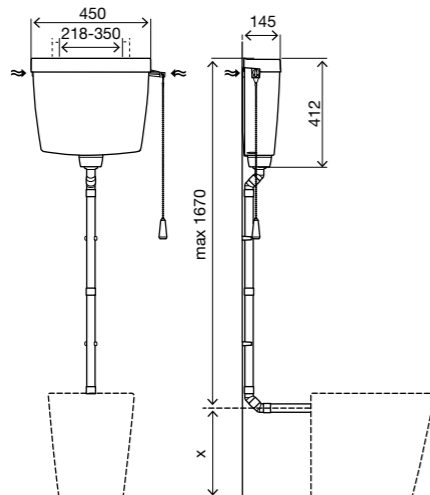

SPECIFIC FEATURES

- High level exposed tank with single flush 9L (adjustable to 6L in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections Three positions;
- EN 14055 CE marking;
- White PS material.

INCLUDES

- Chain for high level installation;
- 4 modular flush pipes Ø32;
- Wall fixation accessories;
- Toilet connection rubber seal Ø32.




cod. **440141** High position

cod. **219759** High position - SASO

TURCHESE

High position

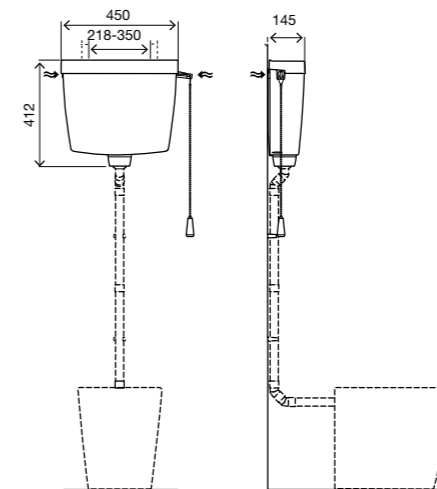

SPECIFIC FEATURES

- High level exposed tank with single flush 6L (adjustable to 9L in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections three positions;
- Compatible with Ø32 flush pipes;
- Pneumatic version available
- EN 14055 CE marking;
- White PS material;
- 145mm thick.

INCLUDES

- Chain for high level installation;
- Wall fixation accessories;
- Toilet connection rubber seal Ø32.



cod. **440881** pneumatic version

ACCESSORIES EXPOSED FLUSH CISTERNS



- Flush pipe set for high exposed cisterns;
- Height 1000mm;
- Toilet connection Ø32;
- Cistern connection Ø50.

COD	
490601	Medium/high cisterns (complete)
490501	Medium/high cisterns (split)



- Medium/high installations.

COD	
490301	H600, L 210 Ø 32 White
490151	H600, L 210 Ø 40 White
490401	H1000, L 210 Ø 40 White



- Medium/Low installations.

COD	
490001	H325, L 210 Ø 32 White
490681	H325, L 210 Ø 40 White
490130	H325, L 350 Ø 40 White



- Internal hygienic system;
- 3/8" brass side seal;
- Refill pipe connection 350 mm;
- 130 mm flush valve pipe connection;
- for use with ceramic with side connections and Quarzo cisterns.

COD	
157022	OLIpure Kit AZOR



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD	
889944	AMBIWAVE



- Flush pipe modules for high exposed cisterns;
- 5 flush pipes Ø32;
- 3 flush pipe bend Ø32;
- Flush pipe bend connection Ø32/50;
- Flush pipe support with fixation screw.

COD	
490881	Modular flush pipe



- Set for high exposed cisterns;
- 1 flush pipe 350mm Ø32;
- 1 flush pipe 500mm Ø32;
- 1 flush pipe 1000mm Ø32.

COD	
490701	Flush pipe Ø32



- Pneumatic kit for Topazio exposed cistern;
- Push button not supply.

COD	
087617	Topazio pneumatic kit



- Single flush;
- Pneumatic actuation;
- ABS material.
- Fixing material;
- Aesthetic covering pipe 1000m
- Pneumatic flexible pipe 2500mm

COD	
605101	Pneumatic push button actuator



- Can be installed after the cistern is installed inside the wall.

COD	
883088	Flow rate reducer


PART NUMBER GUIDE


	Dual Flush	OLipure	Start/Stop	Medium-low position	Close coupled position	High position	Pneumatic version	Silent inlet valve	Anti-condensation lining	kiwa
ECO.OPALA	889680			●				●		
QUARZO	124427	154961	-	●	-	-	-	●	●	-
SMERALDO	012220	-	-	●	-	-	-	●	●	-
ONIX PLUS	340221	-	-	●	●	-	-	●	●	●
TOPAZIO DD	416201 with stop valve	-	-	●	-	-	-	●	●	●
TOPAZIO	-	-	413781	●	-	●	●	●	●	-
ZAFFIRO DD	425201 with stop valve	-	-	-	●	-	-	●	●	●
	002426 Bottom connection									
TURCHESE	-	-	440201 with stop valve	●	-	●	440881	●	●	-
OLISTYLE	-	-	440141	●	-	●	-	-	-	-
KIT OLIPURE	-	101768	-	-	-	-	-	-	-	-

WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
400x150x450	2.362	1	0	2.362	80	1.2	0.81	2.43	208.96
453x143x441	2.798	5	764x474x460	13.99	75	1.24	1	2.45	229.85
463x143x431	2.655	1	0	2.655	65	1.2	0.8	2.36	192.575
353x143x456	2.655	5	767x380x491	13.275	75	1.2	0.8	2.44	219.125
446x144x446	3.312	1	0	3.312	65	1.2	0.8	2.385	235.28
446x144x446	3.244	1	0	3.244	65	1.2	0.8	2.385	230.86
408x176x431	3.09	1	0	3.09	60	1.2	0.8	2.305	205.4
408x176x431	2.892	5	916x430x459	14.46	75	1.35	0.86	2.455	236.9
456x146x430	2.637	1	0	2.637	65	1.2	0.8	2.31	191.405
456x146x430	2.751	1	0	2.751	80	1.2	1	2.31	240.08
161x116x261	0.479	17	595x391x500	8.143	340	1.2	0.8	2.16	182.86




EATLAS	176
ATLAS	177
ATLAS CABLE	177
APOLO	178
BETA	178
FAST START/STOP	179
PUSH ECO	179
ECO TIRETTE	180
HANDLE	180
AG104 PLUS	181
AZOR PLUS	181
IVC100 PLUS	182
OLI ONE	182
JOLLY UNI	183
UNI BOTTOM	183
COMPACT	183
ECO	184
IVC102 PLUS	184
OLIPURE KIT	184

 Side water supply connection


 Bottom water supply connection

 Saves up to 9l of water per day

 Dual flush

 Single flush

 Start/Stop flush

 Bottom and side water supply

 Universal





NO-TOUCH ACTUATION

An infrared sensor with a detection range of up to 50mm to activate the flush. The NO-TOUCH actuation guarantees maximum hygiene, promoting a safer and cleaner experience.

Designed for durability and efficiency, the support can be powered by 6 long-lasting AA batteries.




BATTERY HOLDER*

Designed for durability and efficiency, the support can be powered by 6 long-lasting AA batteries.

Battery power provides continuous and reliable performance, ideal for maintaining system functionality over a long period.

*Batteries not included.

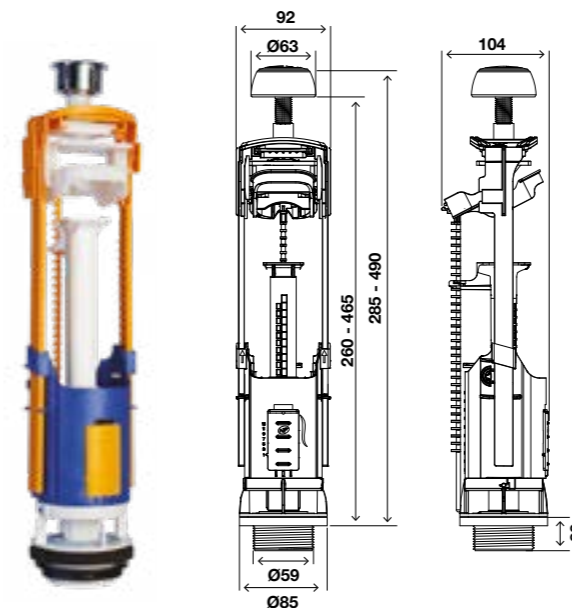

GENERAL FEATURES


- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Allows the off center of the button on the ceramic lid (25mm on each axis);
- Mechanical actuation <20N;
- Efficient flush with high flow rate;
- Damping system silent operation;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Silicone seal;
- Upon request some versions compliant with: NF, SAI and WATERMARK.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.



cod. 011967 Box
cod. 135948 Bag

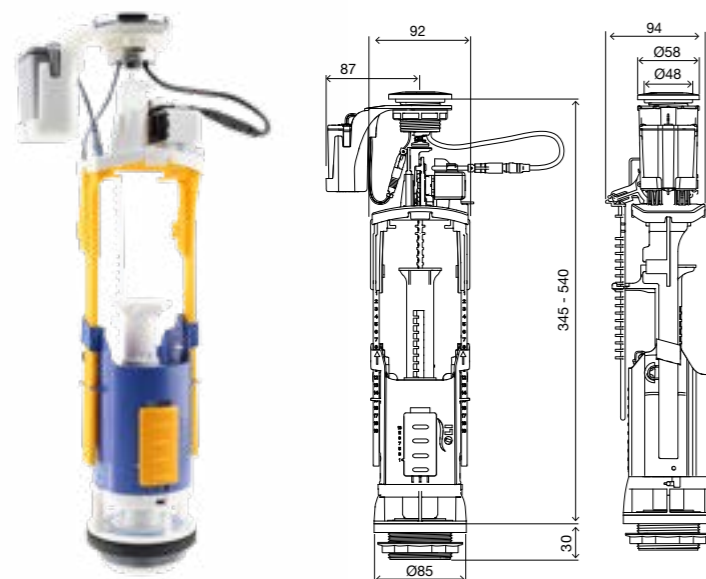

GENERAL FEATURES


- No-touch actuation through hand proximity, built-in infrared sensor;
- Powered by 6 AA batteries (not included);
- Low battery indication via LED signaling;
- Dual flush valve with half and full flush volume regulation;
- Infrared sensor with detection up to 50mm;
- Selection of the discharge through the occlusion time of the infrared sensor;
- Application of the universal top infrared sensor, which does not block the ceramic cover;
- Silent close;
- Telescopic overflow pipe;
- Silicone seal;
- Easy installation and maintenance (click system);
- Certified in accordance with NF and SAI norms.

INCLUDES

- Accessories for fixing the ceramic tank to the toilet;
- Sponge for sealing between the ceramic tank and the toilet (which compensates for ceramic irregularities);
- Chrome sensor button, compatible with ceramic lid holes between Ø38 and Ø50mm;
- Battery holder and box with IP67 protection rating.



cod. 884595 box

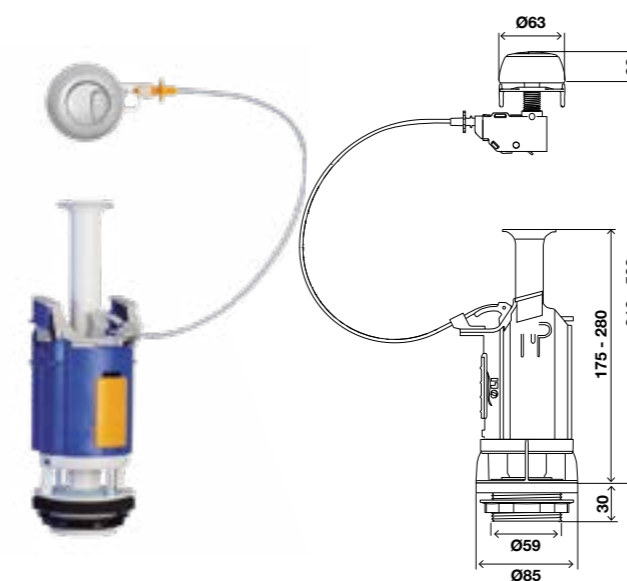

GENERAL FEATURES

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal and flexible application (front, top or side push button position);
- Cable actuation < 20 N;
- Efficient flush with high flow rate;
- Damping system silent operation;
- Adjustable telescopic overflow pipe;
- Silicone seal;
- Upon request some versions compliant with: NF.

INCLUDES


- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.



cod. 022369 Bag
cod. 501120 Box

APOLO

Outlet valve

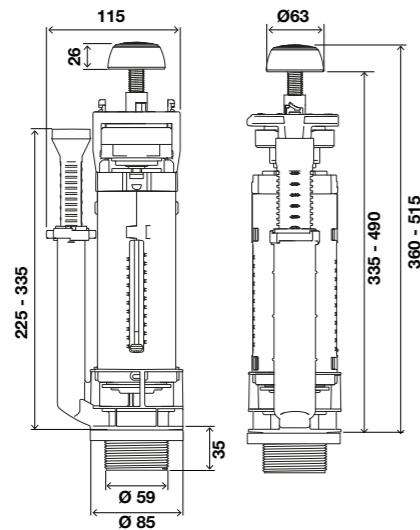

SPECIFIC FEATURES

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Lateral overflow pipe, higher and easy adjustment;
- Lock/unlock system at the top, one step;
- Allows the off center of the button in ceramic lid 360° with 10° of inclination for each axis
- Mechanical actuation <20N;
- Efficient flush with high flow rate;
- Damping system – silent operation;
- Easy maintenance (bayonet system);
- Silicone seal;
- Compliant with: Watermark, NF.

INCLUDES


- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.



cod. **883098**

BETA

Outlet valve

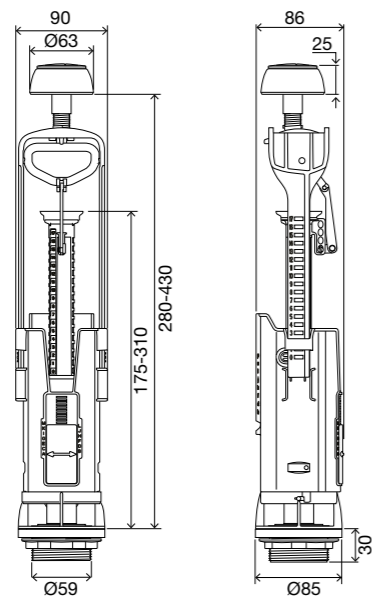

SPECIFIC FEATURES

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Simpler adjustment of full / half flush;
- Efficient flush with high flow rate;
- Silent operation (damping system);
- According with NF.

INCLUDES


- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø 16 to Ø 60mm.



cod. **884443** Box

FAST START/STOP

Outlet valve

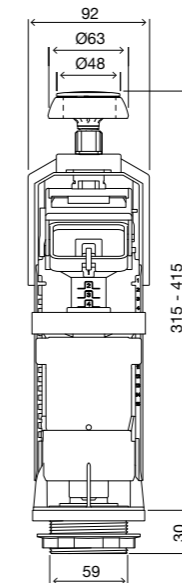

GENERAL FEATURES

- Single flush outlet valve with start/stop system;
- Universal top push button position that locks the ceramic lid;
- Allows the off center of the button on the ceramic lid (20mm on one axis);
- Mechanical actuation <20N;
- Efficient flush with high flow rate;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- Adaptors for older mechanism ceramic support*.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.




*Adaptors Included in the outlet valve FAST START/STOP. These adaptors are compatible with ROCA ceramic tanks and allow the replacement of the outlet valve without the need to remove the ceramic cistern.

cod. **886421** Bag
cod. **887291** Box*

PUSH ECO

Outlet valve

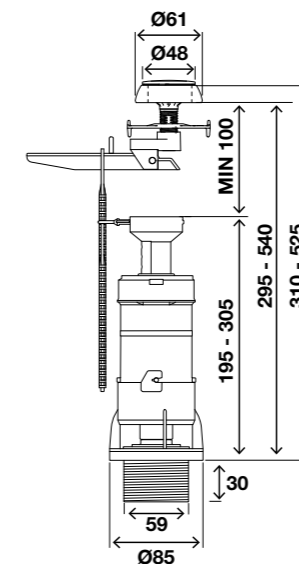

GENERAL FEATURES

- Single flush outlet valve;
- Universal top push button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance;
- EPDM seal.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø50mm.




* Adaptor only in box version.

cod. **886108** Box
cod. **887290** Bag

ECO TIRETTE

Outlet valve

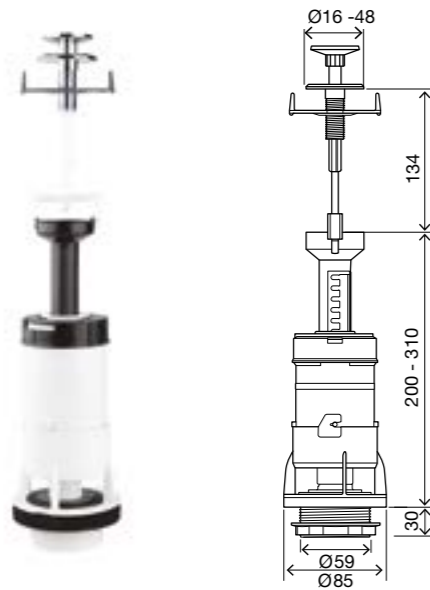

GENERAL FEATURES

- Single flush outlet valve;
- Universal top pull button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance;
- EPDM seal.

INCLUDES


- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Chrome pull button for cisterns with lid holes from Ø16 to Ø40mm.



- cod. **886387** Box for high ceramic tanks
- cod. **886378** Box

AG104 PLUS

Inlet valve

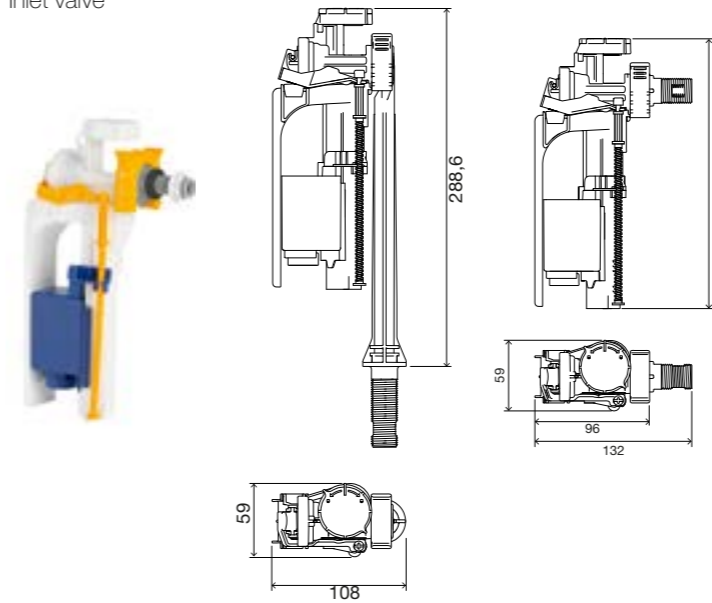

SPECIFIC FEATURES


- New back flow protection to prevent contamination;
- Compliant with UK standards, WRAS;
- Side or bottom water supply with ½" plastic connection;
- Delayed refilling inlet valve: it starts after the outlet valve is in the closed position;
- Easy maintenance without the need to disconnect from the water connection;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar.



- cod. **883099** ½" Plastic bag
- cod. **883103** ½" Plastic bottom bag

AZOR PLUS

Inlet valve

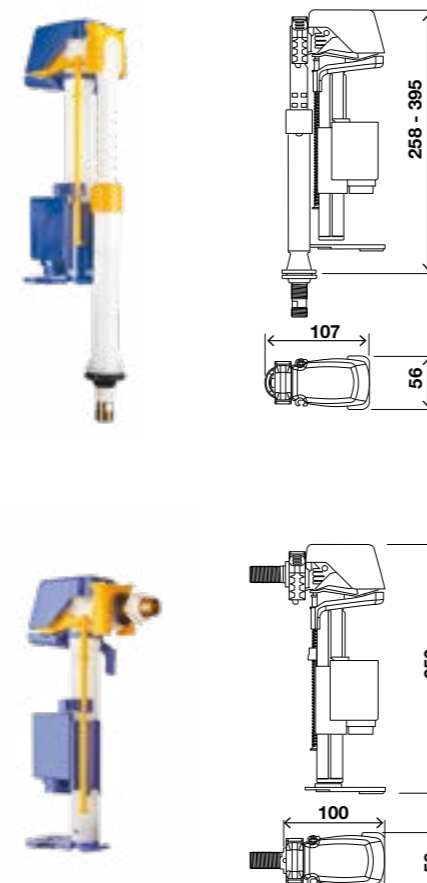

SPECIFIC FEATURES


- Delayed refilling inlet valve: it starts after the outlet valve is in the closed position;
- Side or bottom water supply with ¾" brass and ½" plastic or brass;
- Adjustable height in the bottom connection;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 14 bar;
- Maximum static pressure: 20 bar;
- Silent valve class I;
- Easy maintenance without the need to disconnect from the water connection;
- Anti-backflow function;
- Some versions compliant with, KIWA, UPC, NF (side version), WATERMARK or SABS.



- cod. **020864** Bottom ¾" brass box
- cod. **020863** Side ¾" brass box

HANDLE

Outlet valve

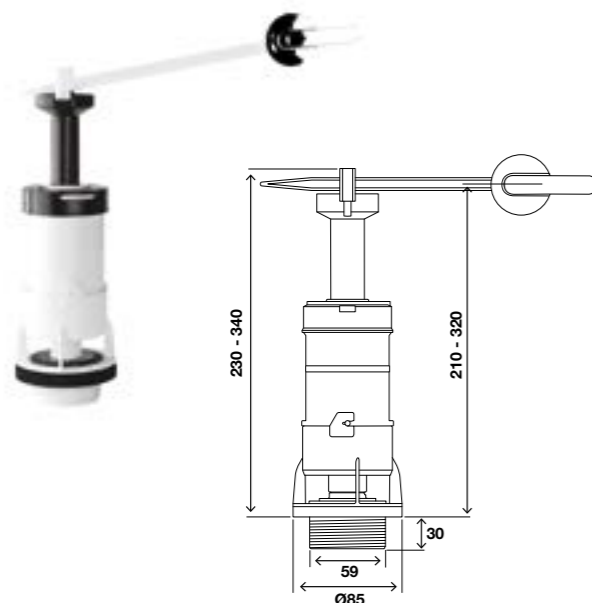

GENERAL FEATURES

- Single flush outlet valve;
- Universal front handle button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance;
- EPDM seal.

INCLUDES



- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Chrome handle button for cisterns with Ø16 hole.



- cod. **886428** box Pilete 43
- cod. **887294** box

VC100 PLUS

Inlet valve

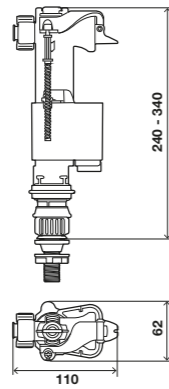

GENERAL FEATURES


- Side or bottom water supply connection in the same inlet valve;
- Integrated filter that can be cleaned without removing the water connection;
- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Side and bottom inlet valve, with 3/8" brass;
- Adjustable height in the bottom connection;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 8 bar;
- Maximum static pressure: 8bar;
- Easy maintenance, no need to disconnect water connection;
- Anti-backflow function.



- cod. **883706** 3/8" brass box
 cod. **883818** 3/8" brass bag

JOLLY UNI

Inlet valve

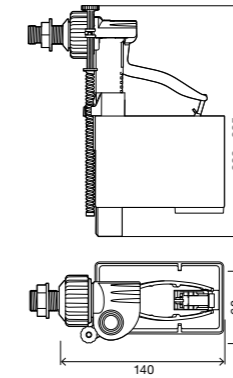

SPECIFIC FEATURES


- Piston closing system (mechanical);
- Side inlet valve, with 3/8" or 1/2" brass or plastic connection;
- Silent valve, NF class I certified;
- Dynamic pressure functioning range: 0.5 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-Backflow function;
- Some versions compliant with: NF or KIWA.



- cod. **560170** 1/2" brass box
 cod. **561460** 3/8" brass box

UNI BOTTOM

Inlet valve

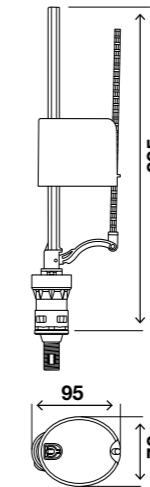

GENERAL FEATURES


- Bottom inlet valve, with 3/8" or 1/2" in brass or plastic connection;
- Piston closing system (mechanical);
- Dynamic pressure functioning range: 0.5 – 8 bar;
- Maximum static pressure: 10 bar.



- cod. **022371** 1/2" brass bag
 cod. **044995** 1/2" plastic bag
 cod. **879622** 3/8" brass bag
 cod. **562160** 3/8" brass box
 cod. **563571** 3/8" plastic bag

OLI ONE

Inlet valve

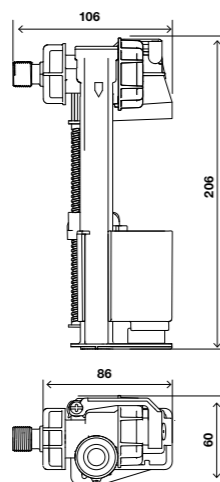

GENERAL FEATURES


- Compatible with in-wall cisterns, exposed and ceramic cisterns, adaptors for competitors compatibility;
- Side water connection with 3/8" brass or 3/8" plastic;
- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Silent inlet valve, class I;
- High performance on dirty waters;
- Counter pressure closing system (hydraulic);
- Effective with any flow pressure;
- Dynamic pressure functioning range: 0.5-10bar;
- Maximum static pressure: 16bar;
- Anti-backflow function.



- cod. **884379** OLI ONE

COMPACT

Inlet valve

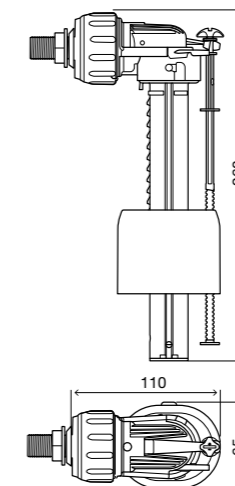


SPECIFIC FEATURES

- Side inlet valve, brass connection;
- Reduced dimensions;
- Silent valve, class I;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-backflow function;
- Some versions compliant with: KIWA, NF.



- cod. **561598** 3/8" brass bag
 cod. **880305** 3/8" brass box

ECO Inlet valve

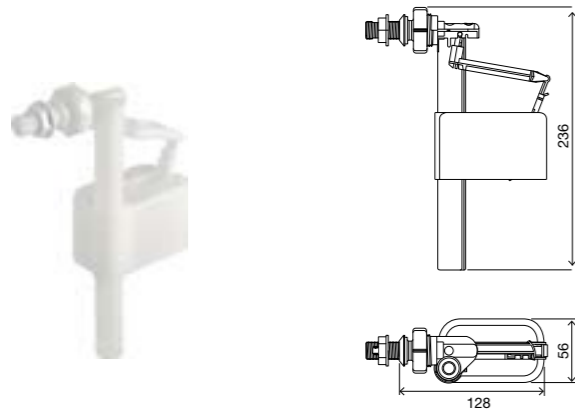


SPECIFIC FEATURES

- Piston closing system (mechanical);
- Side inlet valve, with 3/8" plastic connection;
- Dynamic pressure functioning range: 0.5 - 8 bar;
- Maximum static pressure: 10 bar;
- Anti-backflow function.



cod. **561058** 3/8" plastic bag

IVC102 PLUS Inlet valve

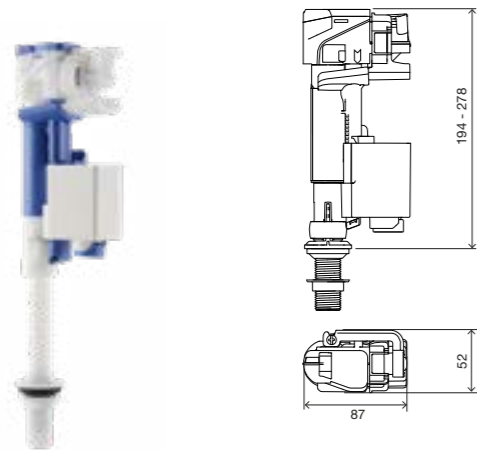


SPECIFIC FEATURES

- Quick filling;
- Compliant with UPC;
- Bottom inlet valve with 1/2" brass, plastic or 15/16" in plastic connection;
- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Height adjustable;
- Silent inlet valve, class I;
- Integrated filter can be cleaned;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.5-6bar;
- Maximum static pressure: 16bar;
- Anti-backflow function.



cod. **879285** 1/2" plastic bag
cod. **878737** 15/16" plastic bag

OLIPURE KIT

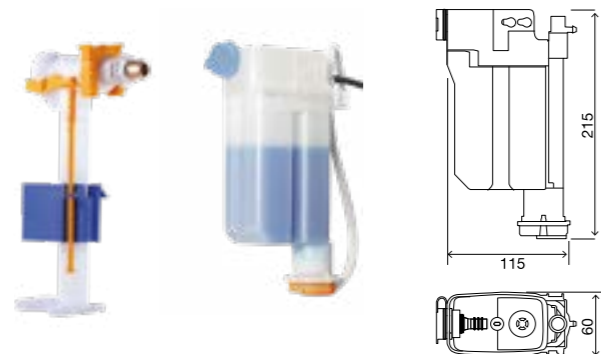

SPECIFIC FEATURES

- OLipure system;
- Azor side 3/8" brass connection;
- 350mm Refill connection pipe;
- 130mm Outlet valve connection pipe;
- Only suitable for ceramic cisterns with side connections and Quarzo exposed cistern.



cod. **101768** Box

MECHANISMS KIT

	ATLAS CABLE	PUSH ECO	FAST START STOP	BETA
UNI BOTTOM	883625 bag	886333 bag	886489 bag	-
ECO	-	886098 bag 889565 3/8 Brass bag	-	-
COMPACT ASTRO	882003 bag	-	886328 bag	887860 bag
IVC100	099938 bag	-	-	-

ACCESSORIES MECHANISMS



- Plugs for ceramic cisterns with bottom connection.

COD

058025

Bottom Plug



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD

889944

AMBIWAVE



- Cover for side connection ceramic tanks.

COD
















493065




Polished Chrome

493064

White

PART NUMBER GUIDE

				Dimensions	complants		
	Dual Flush	Single flush	Start/Stop				
 eALAS	884595 bag			288(H) 108 x 58 (W x D)			
 APOLO	883098 box	-	-	288(H) 108 x 58 (W x D)	●	-	●
 BETA	884443 box	-	-	288(H) 108 x 58 (W x D)	●	-	-
 ATLAS CABLE	022369 bag 501120 box	-	-	288(H) 108 x 58 (W x D)	●	-	-
 ATLAS	135948 bag 011967 box	-	-	288(H) 108 x 58 (W x D)	●	-	●
 FAST STAR/STOP	-	-	886421 bag 887291 box	288(H) 108 x 58 (W x D)	-	-	-
 PUSH ECO	-	887290 bag 886108 box	-	288(H) 108 x 58 (W x D)	-	-	-
 TIRETTE ECO	-	886387* box 886378 box	-	288(H) 108 x 58 (W x D)	-	-	-
 HANDLE	-	886428 box	-	288(H) 108 x 58 (W x D)	-	-	-

									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
59x59x101	0.586	12	595x391x500	7.032	400	1.2	0.8	2.32	254.4
121x121x371	0.73	16	595x391x535	11.68	256	1.2	0.8	2.3	206.88
119x105x355	0.502	20	595x391x500	10.04	320	1.2	0.8	2.16	180.64
300x0.07x550	0.374	30	595x391x500	11.22	480	1.2	0.8	2.16	199.52
119x105x311	0.468	20	595x391x500	9.36	400	1.2	1	1.66	207.2
300x0.07x550	0.462	26	595x391x500	12.012	520	1.2	0.8	2.66	260.24
119x105x355	0.563	20	595x391x500	11.26	400	1.2	1	2.16	245.2
300x0.07x550	0.399	20	595x391x500	7.98	400	1.2	0.8	2.66	179.6
121x121x371	0.578	12	595x391x500	6.936	240	1.2	0.8	2.66	158.72
300x0.07x550	0.346	20	595x391x500	6.92	400	1.2	1	2.66	158.4
119x105x311	0.411	20	595x391x500	8.22	400	1.2	1	2.16	184.4
119x105x311	0.388	20	595x391x500	7.76	500	1.2	1	2.66	214
119x105x311	0.389	20	595x391x500	7.78	500	1.2	1	2.66	214.5
119x105x311	0.406	20	595x391x500	8.12	500	1.2	1	2.66	223

PART NUMBER GUIDE

	Bottom water supply		Side water supply		Upon request versions compliant with					
OLI ONE	-	-	884379 ¾" brass/plastic box		-	-	-	-	-	-
AG104 PLUS	883103 ½" plastic bag	-	●	-	-	-	-	●	-	
	-	883099 ½" plastic bag	●	-	-	-	-	●	-	
AZOR PLUS	020864(bottom) ¾" brass box		-	-	●	●	-	-	-	
	020863 (side) ¾" brass box		-	●	●	●	-	-	●	
IVC100 PLUS	883706 ¾" brass box		-	-	-	-	-	-	-	
	883818 ¾" brass bag		-	-	-	-	-	-	-	
IVC102 PLUS	879285 ½" plastic bag	-	-	-	-	-	-	-	-	
	878737 15/16" plastic bag	-	-	-	-	-	-	-	●	
COMPACT	-	880305 ¾" brass box	-	-	●	●	-	-	-	
	-	561598 ¾" brass bag	-	-	●	●	-	-	-	
JOLLY UNI	-	561460 ¾" brass box	560170 ½" brass box	-	●	●	-	-	-	
UNI BOTTOM	879622 ¾" brass bag	022371 ½" brass bag	-	-	-	-	-	-	-	
	563571 ¾" plastic bag	044995 ½" plastic bag	-	-	-	-	-	-	-	
	562160 ¾" brass box		-	-	-	-	-	-	-	
Eco	-	-	561058 ¾" plastic bag	-	-	-	-	-	-	
OLIpure Kit	-	-	101768	-	-	-	-	-	-	

WxDxH	Weight	Qt.	Multiple Box Dim	Weight					
					Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
111x71x261	0.347	40	595x391x500	13.88	800	1.2	0.8	2.65	297.6
260x0.07 x460	0.257	50	595x391x500	12.85	1000	1.2	0.8	2.66	277
260x0.07 x460	0.199	50	595x391x500	9.95	1000	1.2	0.8	2.66	219
146x76x326	0.357	20	600x400x435	7.14	400	1.2	0.8	2.34	162.8
151x71x261	0.296	30	595x391x500	8.88	600	1.2	0.8	2.65	197.6
151x71x261	0.969	30	595x391x500	29.07	600	1.2	0.8	2.66	601.4
260x0.07 x460	0.305	50	595x391x500	15.25	1000	1.2	0.8	2.66	325
260x0.050x480	0.229	35	595x391x500	8.015	700	1.2	0.8	2.66	180.3
210x0.03x330	0.244	35	595x391x250	8.54	700	1.2	0.8	1.41	190.8
151x71x261	0.303	30	595x391x500	9.09	600	1.2	0.8	2.65	201.8
260x0.07 x460	0.238	60	595x391x500	14.28	1200	1.2	1	2.16	305.6
151x71x261	0.225	30	595x391x500	6.75	600	1.2	0.8	2.66	155
200x0.1x530	0.153	40	595x391x500	6.12	800	1.2	1	2.16	142.4
101x86x401	0.215	20	595x391x500	4.3	400	1.2	0.8	2.66	106
260x0.07 x460	0.123	100	760x496x480	12.3	1200	1.27	1	2.1	167.6
161x116x261	0.479	17	595x391x500	8.143	340	1.2	0.8	2.16	182.86



HYGEA	195
RIVER	196
LAKE	198
LAGOON	204
KAI	209
CERAMIC SEPARATOR	209
URINAL DIVIDER	209
VIOLET	210
BREEZE	211
SERENNA	211
SUN	211




● Compatible: Flush volume 6/3 L ● Compatible: Flush volume 4/2 L ● 4/2 L on request

		RIVER WALL-HUNG	LAKE FLOOR WALL-HUNG	
OLI174 PLUS	DIRECT		●	
	SIMFLEX	● ●		● ●
	S90 SANITARBLOCK	● ●		● ●
OLI120 PLUS	DIRECT		● ●	
	BLOCK	● ●		● ●
	SANITARBLOCK	● ●		● ●
QUADRA PLUS	DIRECT		● ●	
	SANITARBLOCK	● ●		● ●
OLI180	DIRECT		● ●	
	SIMFLEX	● ●		● ●
	SANITARBLOCK	● ●		● ●
EXPERT PLUS	DIRECT		●	
	SIMFLEX	● ●		●
	SANITARBLOCK	● ●		●
RIM OFF	YES	●	●	●
	NO			
COLOURS/FINISHES	white	●	●	●
	Satin white			●
	Black matte			●
	Satin grey			●
	Anthracite matte			●
	Sand matte			●
	Cappuccino matte			●

		LAGOON BTW WALL-HUNG	HYGEA WALL-HUNG
OLI174 PLUS	DIRECT	● ●	
	SIMFLEX		● ●
	S90 SANITARBLOCK		● ●
OLI120 PLUS	DIRECT	● ●	
	BLOCK		● ●
	SANITARBLOCK		● ●
QUADRA PLUS	DIRECT	● ●	
	SANITARBLOCK	● ●	
OLI180	DIRECT	● ●	
	SIMFLEX		● ●
	SANITARBLOCK		● ●
EXPERT PLUS	DIRECT	● ●	
	SIMFLEX		● ●
	SANITARBLOCK		● ●
RIM OFF	YES	●	●
	NO	●	
COLOURS/FINISHES	white	●	●
	Satin white		●
	Black matte		●
	Satin grey		●
	Anthracite matte		●
	Sand matte		●
	Cappuccino matte		●

SHT version*

*HYGEA installation kit necessary COD CM04000886319.

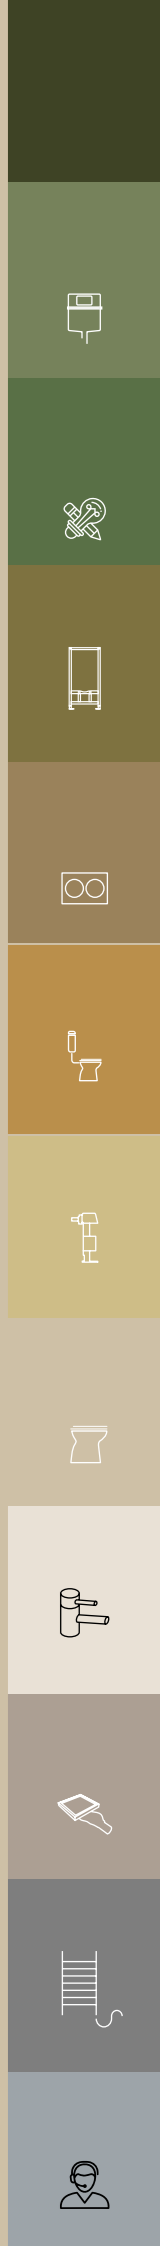



SMART TOILET
hygienic and innovative modular system



ELECTRONIC BIDET
can be installed or replaced very easily
(like a cartridge)



REMOTE CONTROL
allows customised operation




WATER CONNECTION KIT
(Order separately)



GENERAL FEATURES

- Silent mode;
- Cleaning modes (both genders): 2;
- User's memories: 2;
- Nozzle oscillation;
- Adjustable water pressure;
- Adjustable nozzle position;
- Adjustable water temperature;
- Special functions: Auto | Children;
- Certifications: SVGW, DVGW, RoHS, CE.

- cod. **RB20100888514** White
- cod. **RB20100888515** White Matte
- cod. **RB20100888516** Anthracite Matte
- cod. **RB20100888718** Grey matte
- cod. **RB20100888517** Sand matte
- cod. **RB20100889506** Black matte
- cod. **CM04000886319** Kit washlet Hygea

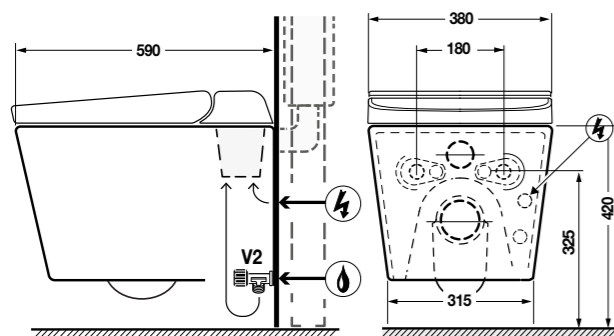

HYGEA
Smart toilet

SEAT & COVER
Soft-close seat & cover
with the main bidet
functions integrated

ELECTRONIC BIDET
Easy access without
compromising toilet use.

**FIXING AND
INSULATION PLATE**

RIM-OFF
Greater hygiene and
ease of cleaning.

White



White matte



Anthracite matte



Grey matte



Sand matte




Black matte





RIVER

White wall-hung toilet

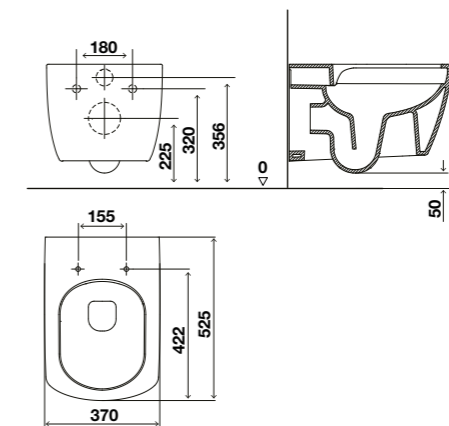


GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Concealed fixation;
- Flush volume: 6L;
- CE Marking.

cod. **RA20200888237** White

SEAT & COVER COVER 01

White

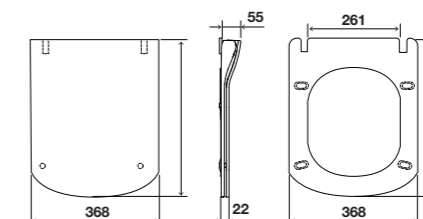


GENERAL FEATURES

- Material: Duroplast;
- Shape: Rectangular;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

cod. **RD10000888262** White

RIVER


White wall-hung bidet

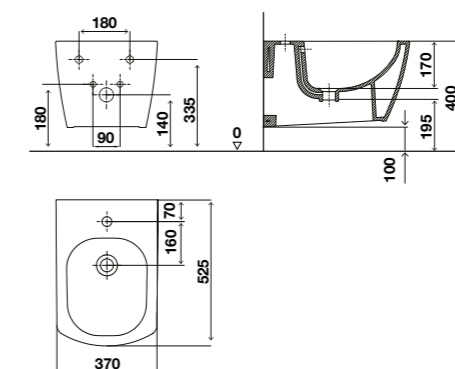

GENERAL FEATURES

- Material: Vitreous China;
- Shape: Rectangular;
- Concealed fixing;
- CE Marking.

cod. **RC20200888245** White

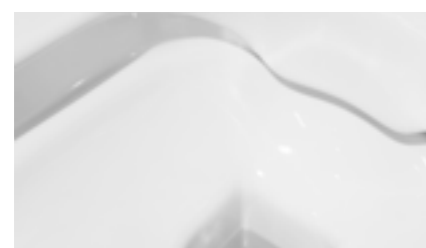

RIM-OFF TOILET
without closed rim



Sewer and water connections
WITH GLAZED FINISH



SEAT & COVER WITH TAKE-OFF system for perfect cleaning



strong seat cover with
SOFT-CLOSE SYSTEM

LAKE



NEW FINISH
White pearl matte



NEW FINISH
Cappuccino matte



NEW FINISH
Black Matte




NEW FINISH
White






RIM-OFF TOILET
without closed rim

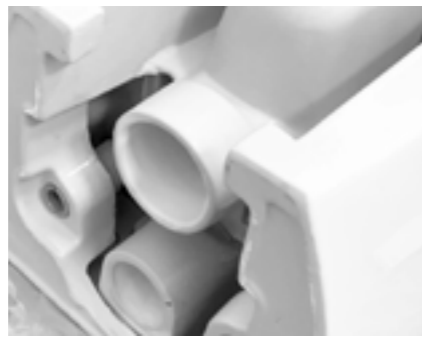

Sewer and water connections
WITH GLAZED FINISH

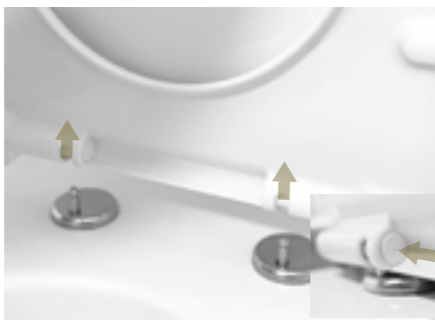


seat cover with
CLIPP-OFF SYSTEM FOR PERFECT CLEANING



strong seat cover with
SOFT-CLOSE SYSTEM

LAKE

wall-hung

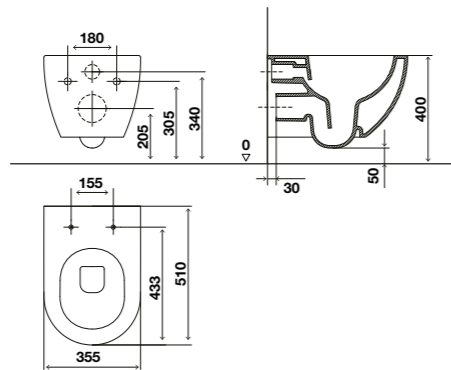


GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Concealed fixation;
- Flush volume: 6L;
- CE Marking.

- cod. **RA2010088231** White
- cod. **RA2010088236** Black
- cod. **RA2010088996** Matte white pearl
- cod. **RA2010088995** Cappuccino matte

SEAT & COVER COVER 02

White and black mate

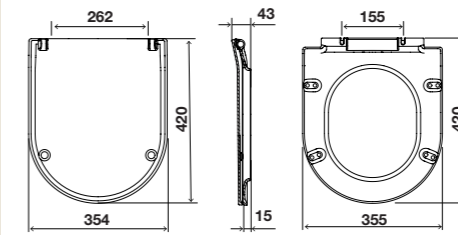


GENERAL FEATURES

- Material: Duroplast;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system
- Soft-close;
- Certifications: NF.

- cod. **RD10000888360** White
- cod. **RD10000888361** Black

SEAT & COVER COVER 06

Matte white pearl and cappuccino matte

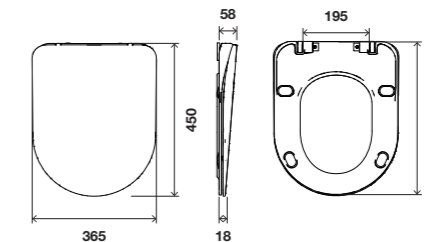


GENERAL FEATURES

- Material: Duroplast;
- Shape: Round;
- Slim seat;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

- cod. **RD10000889998** Matte white pearl
- cod. **RD10000889997** Cappuccino matte

LAKE

White wall-hung bidet

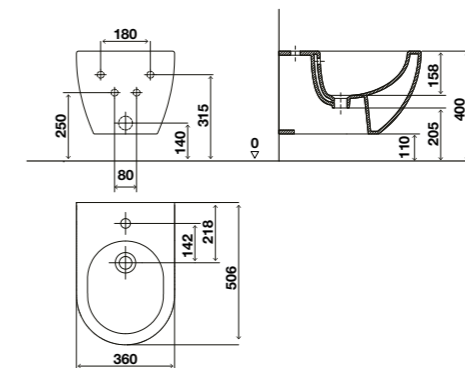

GENERAL FEATURES


- Material: Vitreous China;
- Shape: Round;
- Concealed fixation;
- CE Marking.

- cod. **RC2010088241** White
- cod. **RC2010088243** Black



LAKE

back to wall toilet

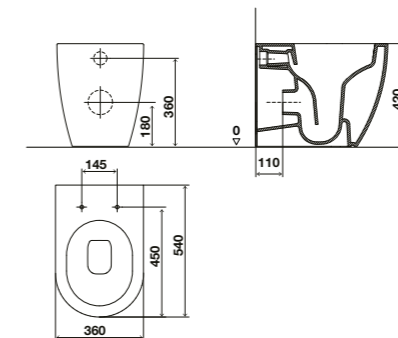


GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Semi-concealed fixation;
- Flush volume: 5L;
- CE Marking.

cod. **RA10100888232** White

SEAT & COVER COVER 06

white

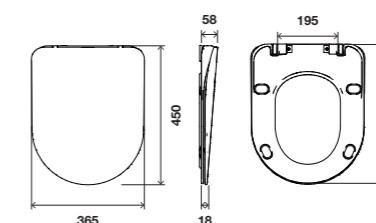


GENERAL FEATURES

- Material: Duroplast;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

cod. **RD10000889177** White

SEAT & COVER COVER 04

white

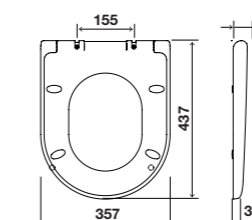


GENERAL FEATURES

- Material: Duroplast;
- Shape: Round, box-type;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

cod. **RD10000888605** White

LAKE

back to wall bidet

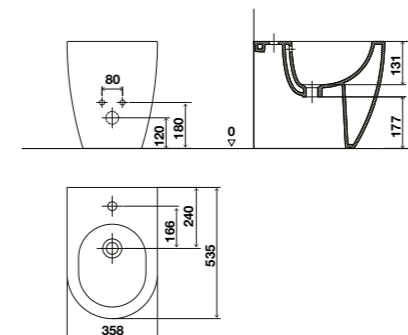

GENERAL FEATURES

- Material: Vitreous China;
- Shape: Round;
- Semi-concealed fixation;
- CE Marking.


cod. **RC10100888239** White



RIM-OFF TOILET
without closed rim



sewer and water connections
WITH GLAZED FINISH

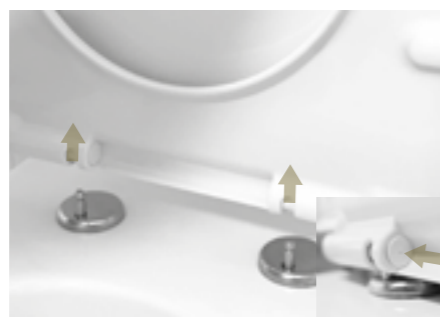

SEAT COVER WITH CLIPP-OFF
system for perfect cleaning




strong seat cover with
SOFT-CLOSE SYSTEM



LAGOON

Wall-hung toilet

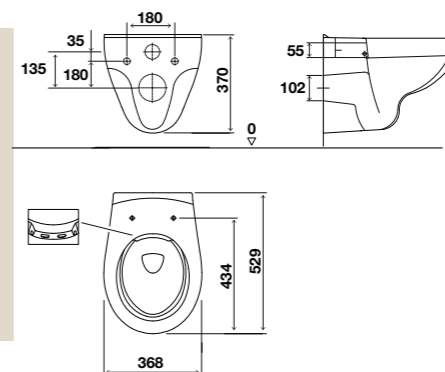


GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Visible fixation;
- Flush volume: 6L;
- CE Marking: EN

cod. **RA20300888238** White

SEAT & COVER COVER 03

white

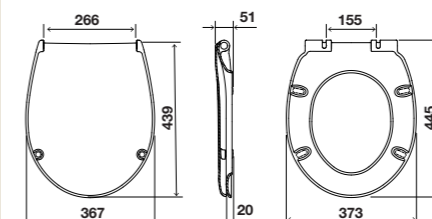


GENERAL FEATURES

- Material: Duroplast
- Shape: Round
- Antibacterial
- Top fixation top fastening system
- Soft-close.

cod. **RD10000888362** White

LAGOON

Bidet Wall-hung

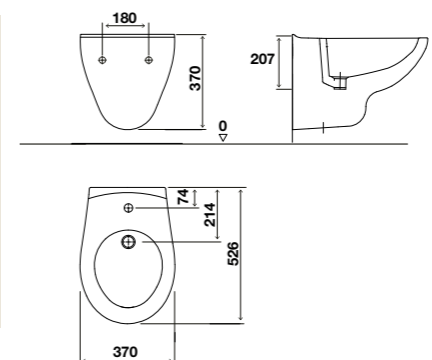

GENERAL FEATURES

- Material: Duroplast;
- Colour: White;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system
- Soft-close.

cod. **RC20300888246** White



RIM-OFF
toilet without closed rim



Sewer and water connections
WITH GLAZED FINISH




SEAT COVER WITH CLIPP-OFF
system for perfect cleaning



Tampo robusto com sistema
SOFT-CLOSE SYSTEM

LAGOON
back to wall toilet

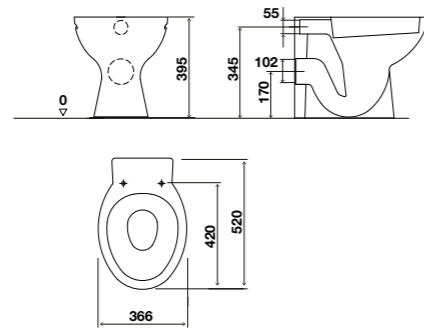


GENERAL FEATURES

- Material: Vitreous China;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Semi-concealed fixation;
- Flush volume: 6L/ 4L;
- CE Marking: EN.

cod. **RA10300888233** White

SEAT & COVER COVER 05

white

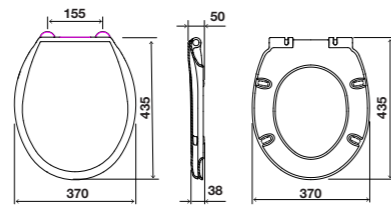


GENERAL FEATURES

- Material: Thermoplast;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system
- Soft-close.

cod. **RD10000888606** White

LAGOON
Back to wall bidet

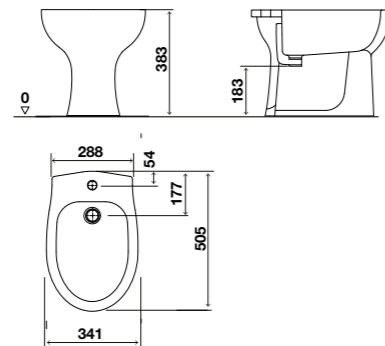

GENERAL FEATURES

- Material: Vitreous China;
- Semi-concealed fixation.

cod. **RC10300888240** White


COMPATIBILITY
URINAL / FRAMES / FLUSH PLATE

				
	URINAL FRAME	OLI120 PLUS WC / URINAL	CONCEALED PRE-INSTALLATION	EASY STRUCTURE
KAI 	●	●		
URINAL DIVIDER 				● 000079 Ceramic white
CERAMIC DIVIDER 				● 889764 Ceramic white ● 889765 Ceramic black
BLINK URINAL 	●	●	● 882264	
GLOBE URINAL 	●	●	● 878822 Gold plated ● 878819 Matte chrome ● 878818 Polished chrome ● 878466 White ● 885580 White Antibacterial	
EAQUA URINAL AC AND BATTERY 			● 879120 eAQUA URINAL Inox AC ● 879119 eAQUA URINAL Inox BATT	



KAI

Wall-mounted urinal

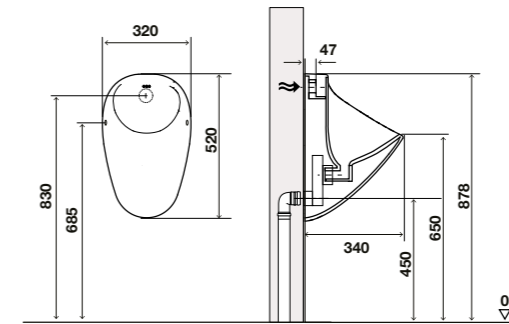

GENERAL FEATURES

- Material: Vitreous China;
- Colour: White or Black;
- Rim-off, rimless design;
- Back supply connection;
- Siphonic Siphon ;
- Fixing type: Semi-visible;
- Shape: Oval;
- CE Marking.


INCLUDES

- Fixing accessories and Siphon .

cod. **RE20100889511** White

cod. **RE20100889512** Black matte

CERAMIC DIVIDER

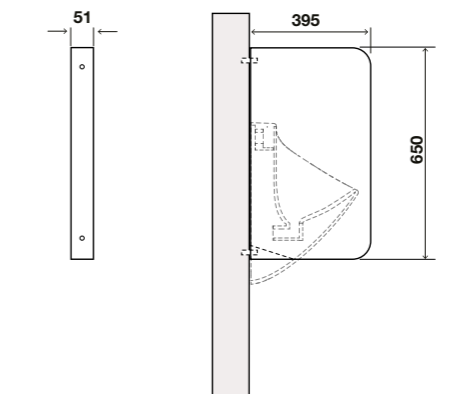

GENERAL FEATURES

- Material: Vitreous China;
- Hidden fixing;
- Shape: Rectangular;
- Compatible with the Easy structure.


INCLUDES

- Installation accessories.

cod. **RE30100889764** White

cod. **RE30100889765** Black

URINAL DIVIDER

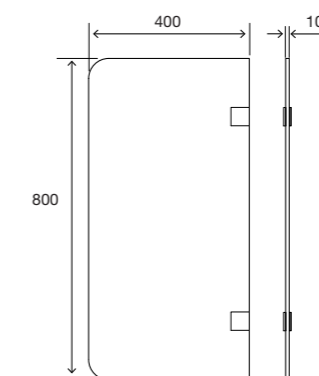

GENERAL FEATURES

- Frosted and tempered glass 8mm thick;
- Stainless steel fixing accessories;
- Application/Direct Fixation to the wall, drywall or thin wall/plasterboard;
- Compatible with the Easy structure.

INCLUDES



- Installation accessories.

cod. **OC10000000079** Frosted glass





BREEZE NEW

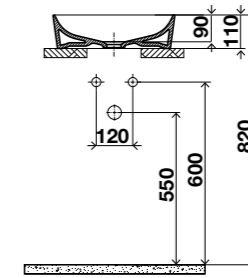

- GENERAL FEATURES**
- Material: Vitreous China;
 - Colour: white, white pearl matte, black matte, cappuccino matte;
 - Shape: Square;
 - Thickness: 5mm;
 - Without tap hole and overflow;
 - Valve not included;
 - CE Marking: EN 14688.



- cod. **RF10100890038** White
- cod. **RF10100890039** White pearl matte
- cod. **RF10100890040** Black matte
- cod. **RF10100890041** Cappuccino matte

COMBINATION

See page 226.



SERENNA NEW



- GENERAL FEATURES**
- Material: Vitreous China;
 - Colour: white, black matte, cappuccino matte;
 - Shape: Oval;
 - Thickness: 5mm;
 - No hole for tap or overflow;
 - Without tap hole and overflow;
 - CE Marking: EN 14688.



- cod. **RF10100890027** White
- cod. **RF10100890028** Black matte
- cod. **RF10100890029** Cappuccino matte

COMBINATION

See page 226.



VIOLET NEW

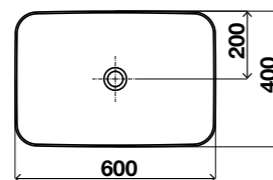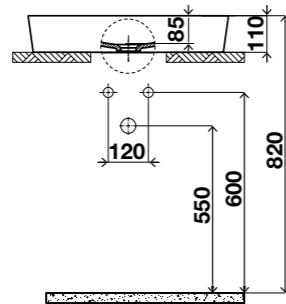

- GENERAL FEATURES**
- Material: Vitreous China;
 - Colour: white, white pearl matte, black matte, cappuccino matte;
 - Shape: Rectangular;
 - Thickness: 5mm;
 - Without tap hole and overflow;
 - Valve not included;
 - CE Marking: EN 14688.



- cod. **RF10100890034** White
- cod. **RF10100890035** White pearl matte
- cod. **RF10100890036** Black Matte
- cod. **RF10100890037** Cappuccino matte

COMBINATION

See page 226.



SUN NEW

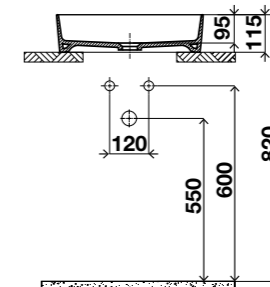

- GENERAL FEATURES**
- Material: Vitreous China;
 - Colour: white, white pearl matte, black matte, cappuccino matte;
 - Shape: Round;
 - Thickness: 5mm;
 - Without tap hole and overflow;
 - Valve not included;
 - CE Marking: EN 14688.

- cod. **RF10100890030** White
- cod. **RF10100890031** White pearl matte
- cod. **RF10100890032** Black matte
- cod. **RF10100890033** Cappuccino matte

COMBINATION

See page 226.



SANITARY WARE ACCESSORIES



COD

889829

Set of Seat & cover stoppers seat 01



COD

889831

Fixation kit accessories for Seat & cover 01




COD

889913

Set of white Seat & cover plugs 02

889914


Set of black Seat & cover plugs 02



COD

889915

Fixation kit accessories for Seat & cover 02



COD

889916

Set of Seat & cover stoppers seat 02



COD

889917


Fixation kit accessories for Seat & cover 03



COD

889918

Set of Seat & cover plugs 03/04



COD

889919

Set of Seat & cover stoppers seat 03/04



COD

889920

Fixation kit accessories for Seat & cover 04



COD

889966


Set of Seat & cover plugs 05



COD

889921

Fixation kit accessories for Seat & cover 05



COD

889927

Set of Seat & cover stoppers seat 05



COD

889826

Fixation kit accessories with short allen wrench (60x120mm)



COD

889828

Fixation kit accessories with short allen wrench (60x205mm)



COD
889832 Fixation kit for back to wall



COD
889833 Hidden fixation kit for Toilet Lake
889834 Hidden fixation kit for Bidet Lake



COD
889835 Hidden fixation kit for Toilet/Bidet Lake



COD
890103 Fixation kit accessories for back to wall



COD
890104 Overflow Ring



COD
889979 Fixation kit accessories for URINAL



COD
889982 Urinal siphon



COD
889983 Urinal seal
















COD
890006 HYGEA electr WC module white
890007 Electric WC module HYGEA White Matte
890008 Electric WC module HYGEA Anthracite matte
890009 Electric WC module HYGEA Grey matte
890010 Electric WC module HYGEA Sand matte
890011 Electric WC module HYGEA Black matte











COD
890012 HYGEA seat & cover white
890013 HYGEA Seat & cover White matte
890014 HYGEA Seat & cover Anthracite matte
890015 HYGEA Seat & cover Grey matte
890016 HYGEA Seat & cover Sand matte
890017 HYGEA Seat & cover Black matte




PART NUMBER GUIDE

	White	White matte	Anthracite matte	Grey matte	Sand matte	Cappuccino matte	Black matte
 HYGEA	RB20100888514	RB20100888515	RB20100888516	RB20100888718	RB20100888517	-	RB20100889506
 RIVER toilet	RA20200888237	-	-	-	-	-	-
 RIVER SEAT & COVER	RD10000888262	-	-	-	-	-	-
 RIVER bidet	RC20200888245	-	-	-	-	-	-
 LAKE toilet	RA20100888231	RA20100889996	-	-	-	RA20100889995	RA20100888236
 LAKE SEAT & COVER	02	RD10000888360	-	-	-	-	RD10000888361
	06	RD10000889997	-	-	-	-	RD10000889998
 LAKE bidet	RC20100888241	-	-	-	-	-	RC20100888243
 LAKE back to wall toilet	RA10100888232	-	-	-	-	-	-
 LAKE SEAT & COVER back to wall	06	RD10000889177	-	-	-	-	-
	04	RD10000888605	-	-	-	-	-
 LAKE back to wall bidet	RC10100888239	-	-	-	-	-	-
 LAGOON Wall-hung toilet	RA20300888238	-	-	-	-	-	-
 LAGOON SEAT & COVER	RD10000888362	-	-	-	-	-	-
 LAGOON Wall-hung bidet	RC20300888246	-	-	-	-	-	-

WxDxH	Weight	Qt.	Multiple Box Dim		Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
			Weight	Multiple Box Dim					
690x490x500	45	1	0	0	6	1.2	1	2	270
390x380x525	22.57	1	-	-	24	1.2	0.8	2.25	682.8
385x480x60	2.97	10	635x490x400	29.7	200	1.2	1	2.3	614
390x380x525	23.60	1	-	-	24	1.2	0.8	2.25	582.83
380x320x520	26.40	1	-	-	24	1.2	0.8	2.25	682.8
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
385x480x60	2.85	10	635x490x400	28.5	200	1.2	0.8	2.3	590
365x375x510	21.59	1	-	-	24	1.2	0.8	2.25	534.59
380x320x520	26.40	1	-	-	25	1.2	1	2.3	534.594
385x480x60	2.85	10	635x490x400	28.5	200	1.2	1	2.3	590
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
605x380x420	28.64	1	-	-	25	1.2	1	2.3	733.75
560x375x410	18.3	1	-	-	25	1.2	1	2.31	476.7
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
560x375x410	15.9	1	-	-	25	1.2	1	2.31	416.7









PART NUMBER GUIDE

	White	Satin white	Satin anthracite	Satin grey	Satin sand	Matte cappuccino	Black mate
 LAGOON back to wall toilet	RA10300888233	-	-	-	-	-	-
 LAGOON SEAT & COVER	RD10000888606	-	-	-	-	-	-
 LAGOON back to wall bidet	RC10300888240	-	-	-	-	-	-
 KAI	RE20100889511	-	-	-	-	-	RE20100889512
 VIOLET	RF10100890034	RF10100890035	-	-	-	RF10100890037	RF10100890036
 BREEZE	RF10100890038	RF10100890039	-	-	-	RF10100890041	RF10100890040
 SERENNA	RF10100890027	-	-	-	-	RF10100890029	RF10100890028
 SUN	RF10100890030	RF10100890031	-	-	-	RF10100890033	RF10100890032

									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
560x375x410	19.57	1	-	-	25	1.2	1	2.31	508.45
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
560x375x410	18.05	1	-	-	25	1.2	1	2.31	470.45
520x320x350	16.3	1	-	-	24	1.2	0.8	1.95	412
621x126x420	14.26	1	-	14.46	46	1.2	0.8	1.2	685.16
411x410x127	9.62	1	-	9.65	58	1.2	0.8	1.2	579.7
610x411x127	11.08	1	-	11.57	46	1.2	0.8	1.2	552.22
486x456x150	8.43	1	-	8.89	42	1.2	0.8	1.2	393.38




OCEAN 222

-  M16 water-saving aerator
-  M18 water-saving aerator
-  M24 water-saving aerator
-  M28 water-saving aerator
-  M12 aerator
-  M16 aerator
-  M24 aerator
-  Infrared electronic actuation

-  Ø25mm cartridge
-  Ø35mm cartridge
-  Ø40mm cartridge
-  Self-closing tap
-  Economic tap
-  10 seconds timer
-  Public spaces


-  Rotating tap
-  Start/stop shower
-  Multifunction shower
-  Shower mixer
-  Hand shower
-  Ceiling shower
-  Anti-theft

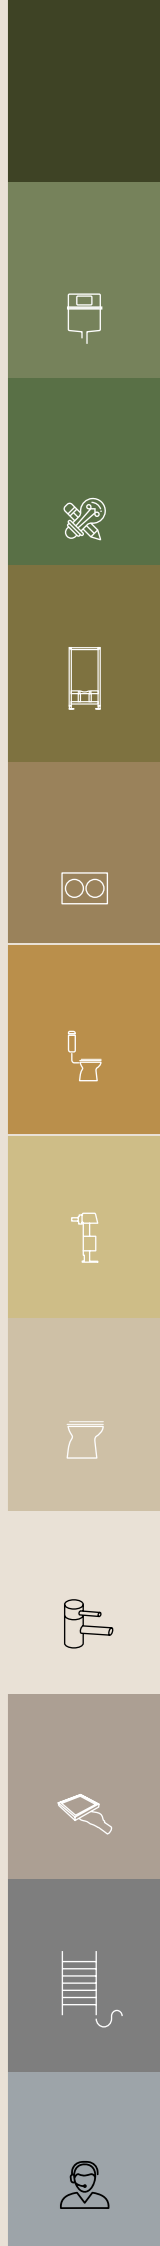

OCEAN




NEW PVD FINISHES:

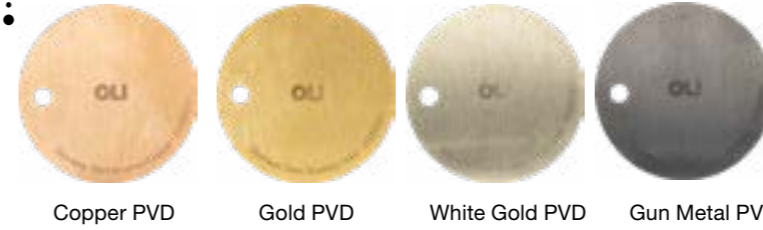

PERFECT MATCH WITH OLI FLUSH PLATES

OCEAN NEW
High Basin Mixer

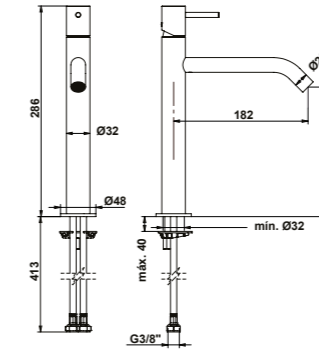

GENERAL FEATURES

- Brass body;
- Ø25mm standard cartridge;
- M16 water-saving aerator;
- Valve not included.


INCLUDES

- Installation accessories;
- Flexible hose.



- cod. **OA10000000024** Polished chrome
- cod. **OA10000000025** Black matte
- cod. **OA100000000336** Gold
- cod. **OA100000000335** White gold
- cod. **OA100000000338** Gun metal
- cod. **OA100000000337** Copper

OCEAN NEW
Basin Mixer

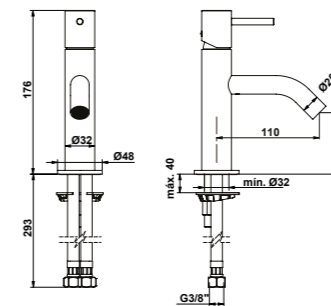

GENERAL FEATURES

- Brass body;
- Ø25mm standard cartridge;
- M16 water-saving aerator;
- Valve not included.


INCLUDES

- Installation accessories;
- Flexible hose.



- cod. **OA100000000305** Polished chrome
- cod. **OA100000000076** Black matte
- cod. **OA100000000340** Gold
- cod. **OA100000000339** White gold
- cod. **OA100000000342** Gun metal
- cod. **OA100000000341** Copper

The measurements shown are in millimeters

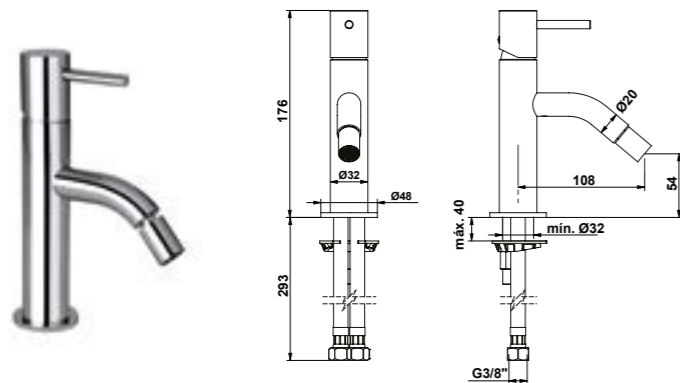


GENERAL FEATURES


- Brass body;
- Ø25mm standard cartridge;
- M16 swivel water-saving aerator;
- Valve not included.

INCLUDES

- Installation accessories;
- Flexible hose.



- cod. **OA1000000306** Polished chrome
- cod. **OA1000000073** Black matte
- cod. **OA10000000344** Gold
- cod. **OA10000000343** White gold
- cod. **OA10000000346** Gun metal
- cod. **OA10000000345** Copper

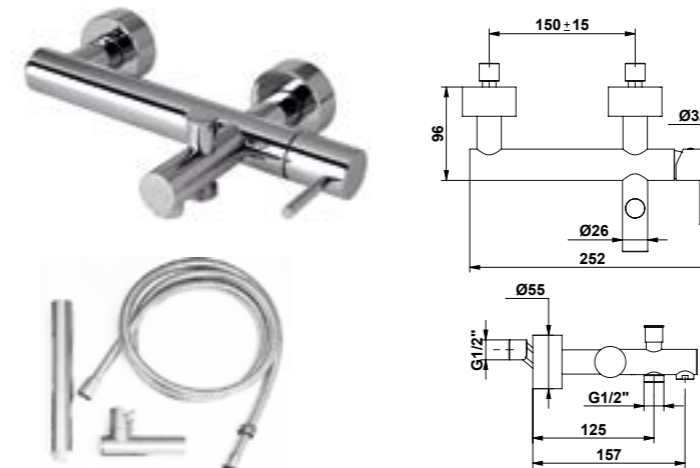

GENERAL FEATURES


- Brass body;
- Ø25mm standard cartridge;
- M18 aerator;
- Flexible hose in stainless steel;
- Hand shower and holder in ABS with flow regulator.

INCLUDES

- Installation accessories;
- Hand shower and holder.



- cod. **OA10000000308** Polished chrome
- cod. **OA10000000071** Black matte

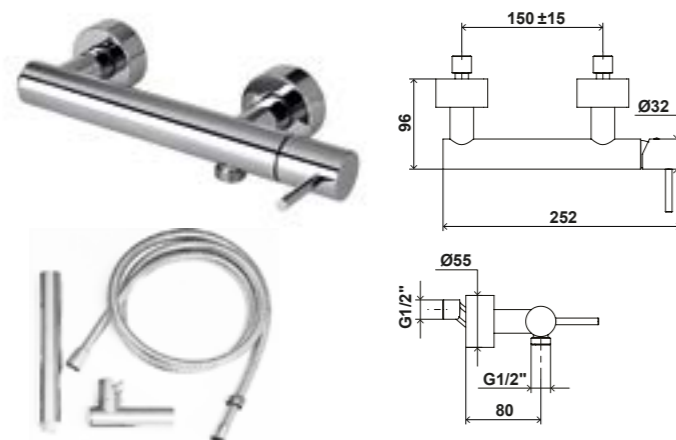

GENERAL FEATURES


- Brass body;
- Ø25mm standard cartridge;
- Flexible hose in stainless steel;
- Hand shower and holder in ABS with flow regulator.

INCLUDES

- Installation accessories;
- Hand shower and holder.



- cod. **OA10000000307** Polished chrome
- cod. **OA10000000072** Black matte

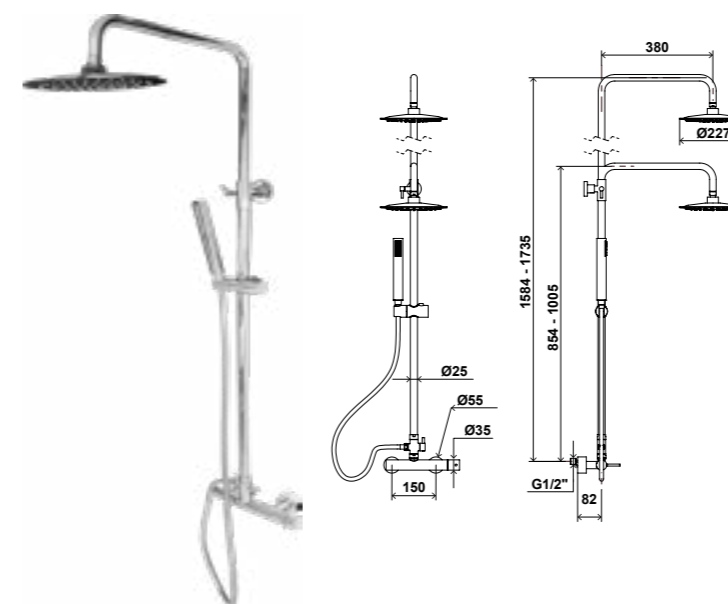

GENERAL FEATURES

- Material: Stainless steel.

INCLUDES

- Integrated arm with circular shower;
- Hand and ceiling shower, with built-in flow regulator;
- Shower holder;
- Flexible hose;
- Integrated inverter;
- Installation accessories.



- cod. **OA10000000080** Polished chrome
- cod. **OA10000000081** Black matte
- cod. **OA10000000348** Gold
- cod. **OA10000000347** White gold
- cod. **OA10000000350** Gun metal
- cod. **OA10000000349** Copper



- Material: brass;
- Finish: Polished Chrome.

COD.

OA20000000337

Valve without overflow



- Material: Zamak;
- Finish: Polished chrome or Black matte

COD.

OA20000000023

Clic-clac valve

OA20000000037

Clic-clac valve - Black matte



- Material: brass;
- Finish: Gold PVD, White Gold, Copper and Gun metal



COD.

OA20000000330

Clic-clac valve: Gold

OA20000000329


Clic-clac valve: White gold

OA20000000331

Clic-clac valve: Copper

OA20000000332

Clic-clac valve: Gun metal

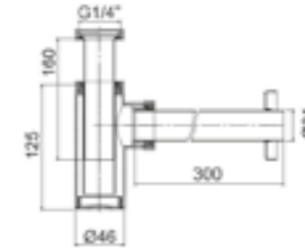

- Compatible with automatic flush valve and clic-clac;
- Material: Stainless steel;
- Finish: Chrome, Black matte, Gold PVD, White gold, Copper and Gun metal.

INCLUDED

- Installation accessories.

* See dimensioned drawing in the Datasheet



COD.

OA20000000024

Washbasin siphon

OA20000000032

Washbasin siphon Black matte

OA200000000334

Washbasin siphon Gold pvd*

OA200000000333


Washbasin siphon White gold pvd*

OA200000000335

Washbasin siphon Copper pvd*

OA200000000336

Washbasin siphon Gun metal pvd*

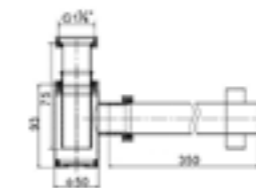

- Compatible with automatic flush valve and clic-clac;
- Material: stainless steel;
- Finish: Polished chrome or black matte.

INCLUDED

- Installation accessories.

COD.

OA20000000030







Bidet siphon

OA20000000031


Bidet siphon Black matte



PART NUMBER GUIDE


	Polish Chrome	Black Mate	Gold	White Gold	Gun metal	Cooper
OCEAN High Basin Mixer 	OA1000000024	OA1000000025	OA10000000336	OA10000000335	OA10000000338	OA10000000337
OCEAN Basin Mixer 	OA10000000305	OA10000000076	OA10000000340	OA10000000339	OA10000000342	OA10000000341
OCEAN Bidet Mixer 	OA10000000306	OA10000000073	OA10000000344	OA10000000343	OA10000000346	OA10000000345
OCEAN Shower Mixer 	OA10000000307	OA10000000072	-	-	-	-
OCEAN Bathtub Mixer 	OA10000000308	OA10000000071	-	-	-	-
OCEAN Shower Ramp 	OA10000000080	OA10000000081	OA10000000348	OA10000000347	OA10000000350	OA10000000349



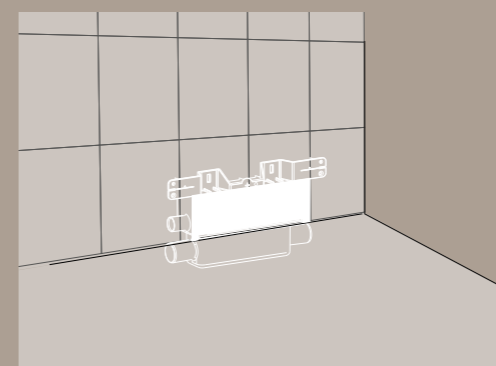

WALL




A shower drain system integrated into the wall with an elegant stainless steel grate, which allows you to use the entire shower space. Easy to maintain, it's the ideal solution for the shower.

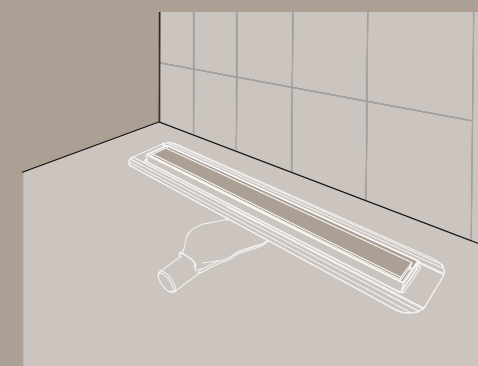

FLOOR

The floor-integrated shower drain system with an elegant stainless steel grate allows you to use the entire shower space. Easy to maintain, it's the ideal solution for any shower.

- OLIFILO STANDARD 235
- OLIFILO CERAMIC 237
- OLIFILO STANDARD PLUS 240
- OLIFILO CERAMIC PLUS 241
- OLIFILO ADVANCED 245
- OLIFILO X-WALL 247
- BALANCE 248

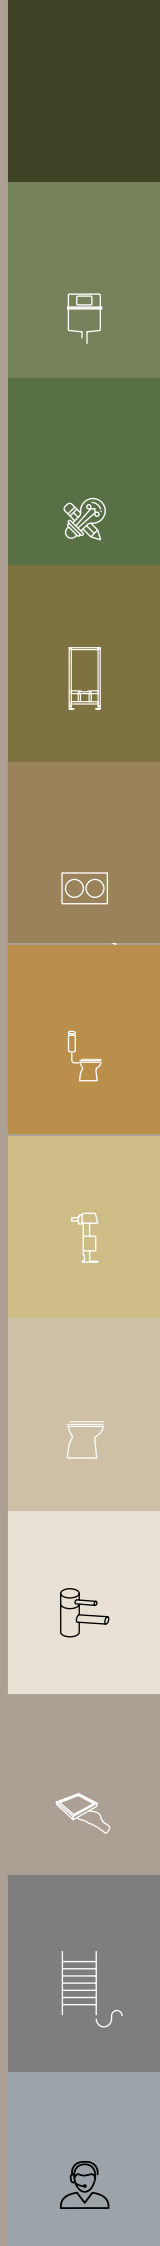


GENERAL FEATURES

Customizable and adaptable to any shower space, OLIFILO will add sophistication and functionality to your bathroom environment while ensuring easy and safe access.

		KIT OLIFILO STANDARD	KIT OLIFILO CERAMIC
Materials/Finishes	Brushed stainless steel	●	
	Materials/Finishes	●	
	Customisable		●
	Chrome aluminium		
	Black aluminium		
Waterproofing	Pre-mounted waterproof membrane		
	Butyl sealing roll	●	●
	Separate waterproofing membrane	●	●
Siphon	Horizontal siphon	●	●
	Self-adjusting siphon		
	Adjustable siphon (manual)	●	●
	High resistance to odors	●	●
	Adjustable feet	●	●
	Overall installation height (mm)	80	80
Grate dimensions	300 mm		
	550-650-750 mm	●	●
	600-700-800 mm		
	1000 mm		
	Cut-to-size		

	PLUS	PLUS	KIT OLIFILO ADVANCED	KIT OLIFILO X-WALL
	●			●
	●			
		●		
			●	
			●	
	●	●	●	●
	●	●	●	
	●	●	●	●
	●	●	●	●
	70	70	70	70
				●
	●	●		
			●	
			●	

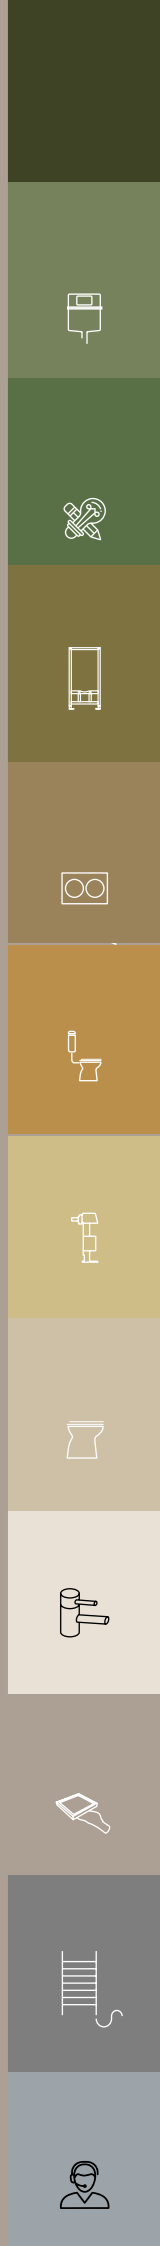



ADJUSTABLE FEET



ANTI-ODORS
Dry Siphon




WATERPROOFING
Includes butyl roll.



HAIR FILTER



HORIZONTAL SIPHON Ø50MM

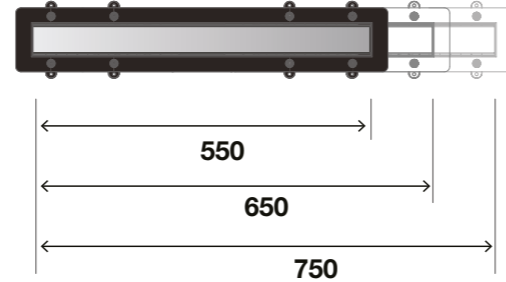

AVAILABLE IN SIZES: 550/650/750

OLIFILO STANDARD NEW

WATERPROOFING
Waterproofing is guaranteed by the membrane and sealing roll.

FINISHES
Brushed stainless steel, black lacquered and with the possibility of customizing in the same finish as the bathroom



SIPHON
Horizontal Siphon Ø50 mm



HEIGHT ADJUSTABLE LEGS
Facilitates installation, ensuring better drainage efficiency.



IDEAL FOR PERSONS WITH REDUCED MOBILITY

BLACK LACQUERED STAINLESS STEEL




BRUSHED STAINLESS STEEL



CERAMIC



INSTALLATION EXAMPLE



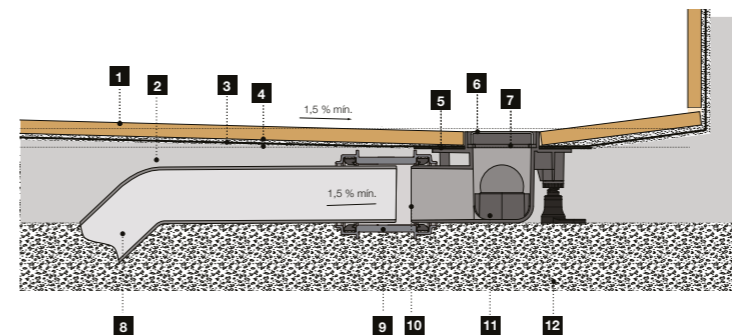


1	Floor	7	Grate
2	Mortar plaster with slope	8	Ø50mm drainage pipe
3	Membrane	9	Ø50/50 Adaptor
4	C2 Cement adhesive	10	Ø50 Outlet
5	Butyl band	11	Siphon body with water retention
6	Linear tray	12	Slab



OLIFILO STANDARD

550-650-750

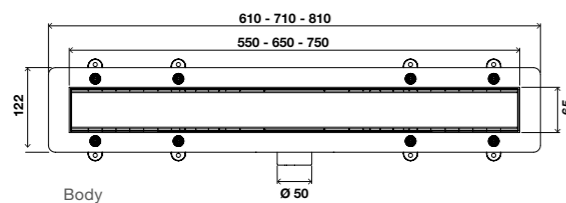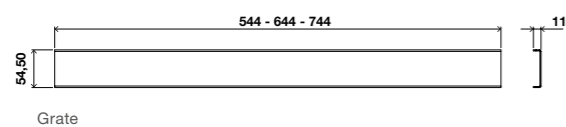

GENERAL FEATURES

- Stainless steel grate (AISI 304);
- Finish: Brushed and black lacquered;
- Height adjustable;
- Waterproofing included;
- PVC connection Ø50mm;
- Ideal for persons with reduced mobility.

Siphon :

- Dry Siphon , siphonic, in polypropylene (PP);
- Ø50 mm Siphon outlet.
- Evacuation flow rate 0.4 L/s.

Kit includes:




- Siphon + Grate;
- Membrane without adaptor (1.5Mx2M);
- Butyl roll;
- Hair filter;
- 4 support legs.



cod.	OB30000041055	550
cod.	OB30000041065	650
cod.	OB30000041075	750
cod.	OB30000045076	550 Black
cod.	OB30000045077	650 Black
cod.	OB30000045078	750 Black

OLIFILO CERAMIC

550-650-750

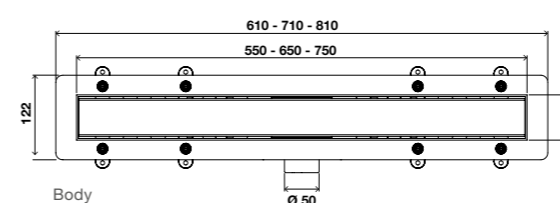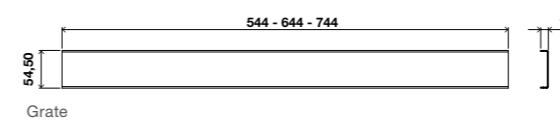

GENERAL FEATURES

- Integrated shower drain with the same floor finish, 10 mm height recommended;
- Height adjustable;
- Waterproofing included;
- PVC connection Ø50 mm;
- Ideal for persons with reduced mobility.

Siphon :

- Dry Siphon , siphonic, polypropylene (PP);
- Ø50 mm Siphon outlet.
- Evacuation flow rate 0.4 L/s.

Kit includes:

- Siphon + Grate;
- Membrane without adaptor (1.5Mx2M);
- Butyl roll;
- Hair filter;
- 4 support legs.



cod.	OB30000045055	550
cod.	OB30000045065	650
cod.	OB30000045075	750





INCLINATION GRADIENT
Ensures perfect water drainage.



SIPHONIC SIPHON
Siphon with 58mm height, designed for efficient drainage (28 l/min), easy cleaning, and maintenance.

This Siphon includes an adaptor with a factory-sealed membrane and requires a total installation height of 70mm.




TERMO-SEALED MEMBRANE ADAPTOR

The geotextile membrane, with 4 layers in its composition, two interior layers of EVA and two outside made of non-woven fabric, allows for greater waterproofing and plumbing of the water through the Siphon.



AVAILABLE IN SIZES:

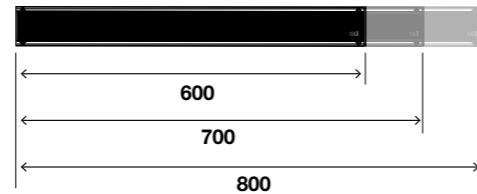

HAIR FILTER
Easy access for cleaning.



LACQUERED BLACK STAINLESS STEEL



BRUSHED STAINLESS STEEL



GOLD PVD



CERAMIC




OLIFILO STANDARD PLUS



IDEAL FOR PEOPLE WITH REDUCED MOBILITY

100% WATERPROOFING
Easy-to-install membrane, thanks to its flexibility and lightness. It can be adapted to any space.

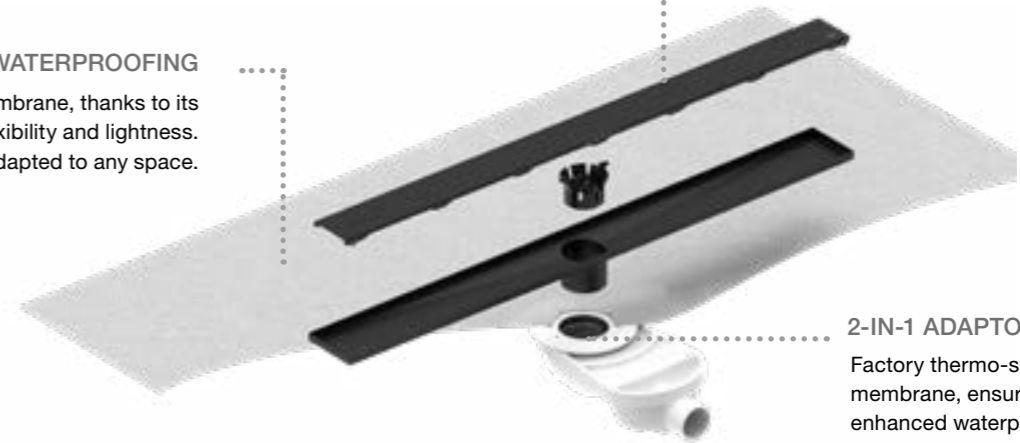

FINISHES


Brushed stainless steel, matte lacquered black, gold PVD and ceramic.

2-IN-1 ADAPTOR:
Factory thermo-sealed membrane, ensuring enhanced waterproofing. Easier connection to the Siphon.




360° ADJUSTABLE

HYDRAULIC SIPHON :
"Drainage efficiency.
Flow rate > 28L/min (EN 1253)."

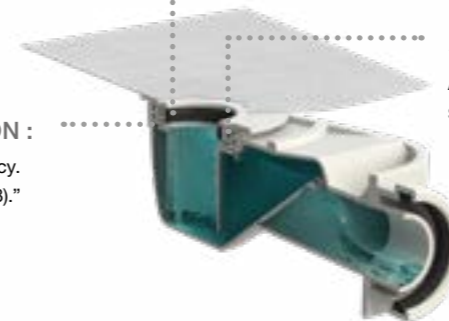

ANTI-BACKFLOW:
Anti-backflow system and secondary drainage.

INSTALLATION EXAMPLE

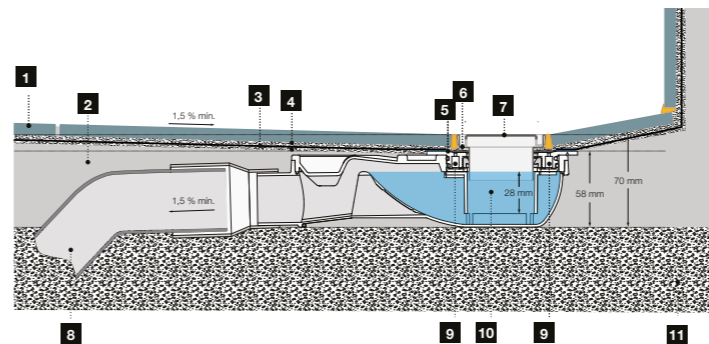

1 Floor	7 Grate
2 Mortar plaster with slope	8 Ø50mm drainage pipe
3 Membrane	9 Secondary drainage
4 C2 cement adhesive	10 Siphon body with water retention
5 Butyl band	11 Slab
6 Linear tray	



OLIFILO STANDARD PLUS NEW

600-700-800



GENERAL FEATURES


- Stainless steel Grate (AISI 304);
- Finish: brushed, matte black lacquered and gold PVD;
- Easy installation;
- Connection with pressure fitting;
- Waterproofing included;
- Ideal for people with reduced mobility.

- Siphon :
- ABS siphonic Siphon ;
 - Ø40 mm Siphon outlet.
 - Flow rate >28 L/min.

- KIT INCLUDES:
- Siphon + body + Grate;
 - Membrane without adaptor (1.5Mx2M);
 - Hair filter.
 - Body
 - Grate



cod.	OB30000041830	600
cod.	OB30000041831	700
cod.	OB30000041832	800
cod.	OB30000051830	DARK 600
cod.	OB30000051831	DARK 700
cod.	OB30000051832	DARK 800
cod.	OB30000061830	Gold 600
cod.	OB30000061831	Gold 700
cod.	OB30000061832	Gold 800

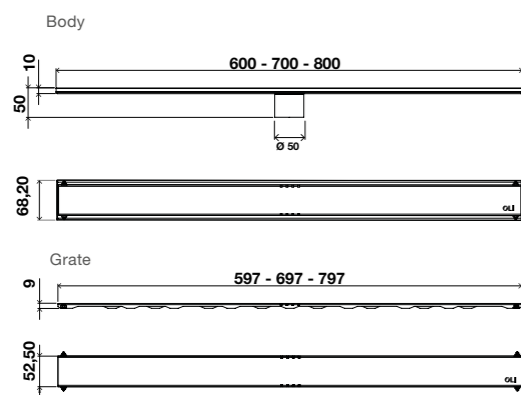

OLIFILO CERAMIC PLUS NEW

600-700-800



GENERAL FEATURES


- Integrated shower drain with the same floor finish;
- Height adjustable;
- Waterproofing included;
- Ø50mm PVC connection;
- Ideal for people with reduced mobility.

- Siphon:
- Dry Siphon , siphonic, in polypropylene (PP);
 - Ø50mm Siphon outlet;
 - Evacuation flow rate 0.4 L/s.

- KIT INCLUDES:
- Siphon + Grate;
 - Membrane without adaptor (1.5Mx2M);
 - Butyl roll;
 - Hair filter;
 - 4 support feet.




cod.	OB30000045830	600
cod.	OB30000045831	700
cod.	OB30000045832	800

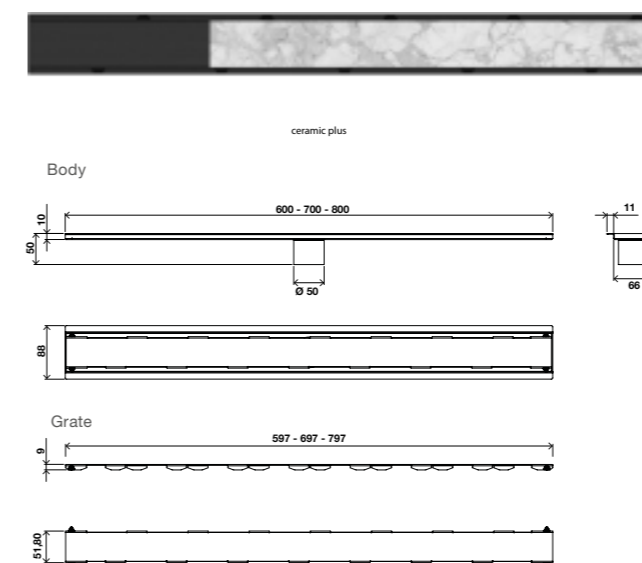



CUSTOMIZABLE SOLUTION

Adjustable size.



SIPHONIC SIPHON

Siphon with 58mm height, with a design that provides efficient drainage (28 l/min), cleaning and maintenance.



CUSTOMISABLE SOLUTION THERMO-SEAL ADAPTOR MEMBRANE

The geotextile membrane, with 4 layers in its composition, two interior layers of EVA and two outside made of non-woven fabric, allows for greater waterproofing and plumbing of the water through the Siphon .



EASY-TO-REMOVE GRATE

Filter easy access for cleaning.



HAIR FILTER

Easy access for cleaning



OLIFILO ADVANCED PLUS




IDEAL FOR PEOPLE WITH REDUCED MOBILITY

100% WATERPROOFING

Easy-to-install membrane, thanks to its flexibility and lightness. It can be adapted to any space.

FINISHES
Chromed and black anodised

MATERIAL
Aluminium 6063 T6

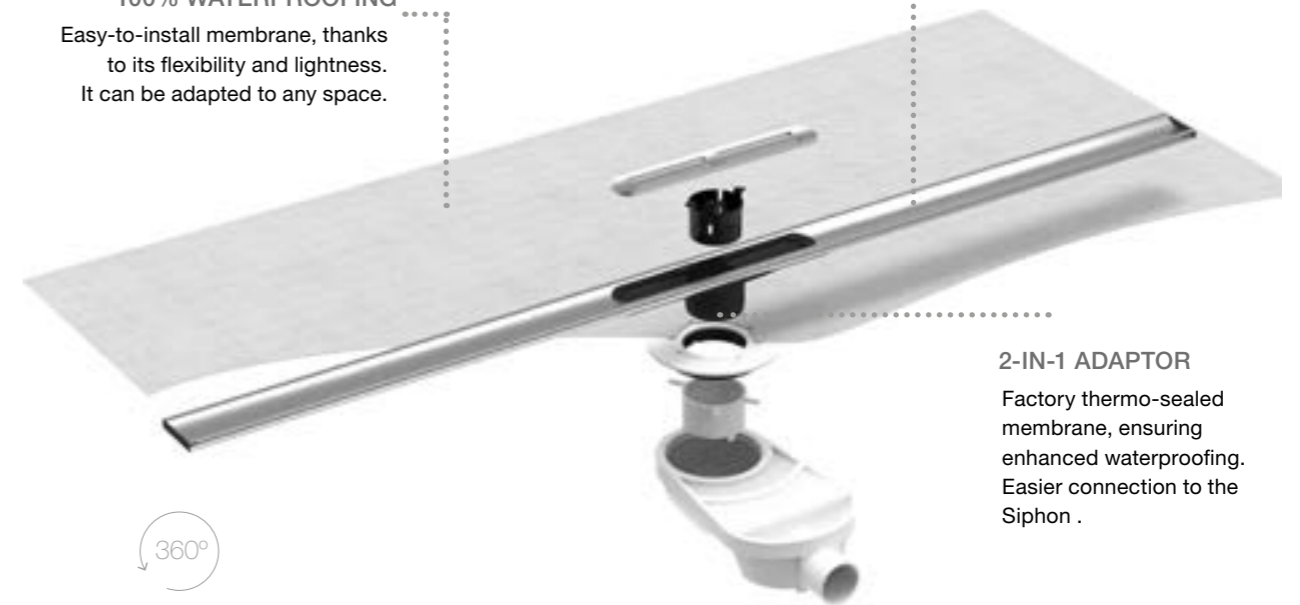

2-IN-1 ADAPTOR

Factory thermo-sealed membrane, ensuring enhanced waterproofing. Easier connection to the Siphon .




360° ADJUSTABLE

ANTI-BACKFLOW

Anti-backflow system and secondary drainage.

HYDRAULIC SIPHON

"Drainage efficiency. Flow rate > 28L/min (EN 1253)."

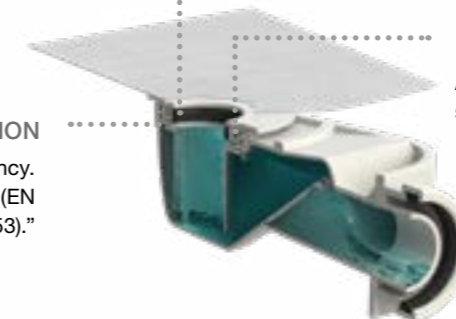


BLACK ANODIZED ALUMINIUM



CHROME ANODIZED ALUMINIUM




INSTALLATION EXAMPLE

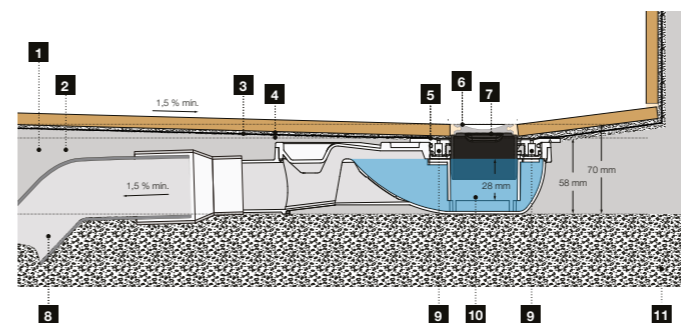

- | | |
|-----------------------------|-------------------------------------|
| 1 Floor | 7 Hair collector |
| 2 Mortar plaster with slope | 8 Ø50mm drainage pipe |
| 3 Membrane | 9 Secondary drainage |
| 4 C2 cement adhesive | 10 Siphon body with water retention |
| 5 Butyl band | 11 Slab |
| 6 Linear tray | |

OLIFILO ADVANCED NEW

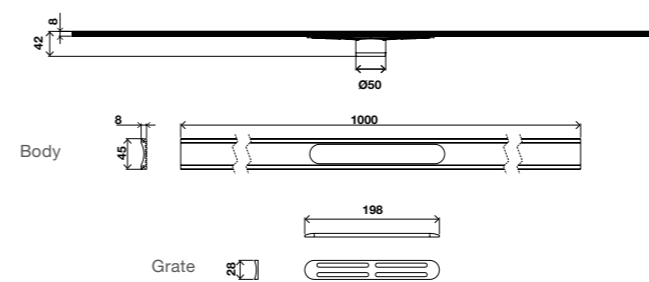

GENERAL FEATURES

- Adjustable to the required size;
- Material: Aluminium 6063 T6;
- Colour/Finish: Chromed anodised and black (25 microns);
- High corrosion resistance;
- Grate height: 8mm;
- Outlet pipe: Ø50mm;
- Pressure fitting waterproof connection;
- Membrane with adaptor;
- Ideal for people with reduced mobility.

Siphon :


- Siphonic Siphon in ABS;
- Ø40 mm Siphon outlet;
- Evacuation flow rate: >28 L/min.

Kit includes:

- Siphon + body + Grate;
- Membrane with adaptor (1.5Mx2M);
- Hair filter.



cod. **OB30000023804** 1000
 cod. **OB30000053804** DARK 1000

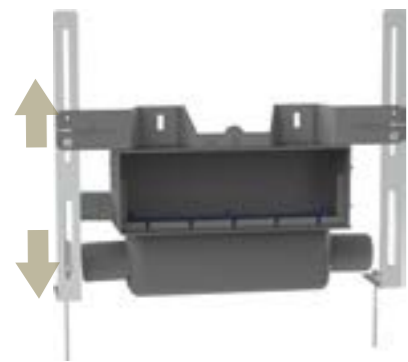

HEIGHT ADJUSTABLE FEET
Facilitates the installation process.



DUAL CONNECTION
Water drainage can be connected to the right or left.



THERMO-SEALED MEMBRANE TO SIPHON
Easier to apply.



GRATE ADJUSTMENT
Adjustable according to wall thickness.



GENERAL FEATURES


- Matte brushed stainless steel grate;
- Minimum installation height: 70mm;
- Condensate discharge systems for integrated air conditioning systems;
- Siphon body made of ABS for better adhesion to the pre-mounted waterproof membrane;
- High flow rate: 0.6 l/s (36 l/min);
- High resistance to odors: 290 Pa (200 Pa requested);
- For installation in walls thicker than 11 cm;
- Ideal for people with reduced mobility.

INCLUDES:

- Siphon + body + grate;
- Membrane;
- Hair filter;
- Body;
- Grate.




cod. **OB3000000201** 30 Matte

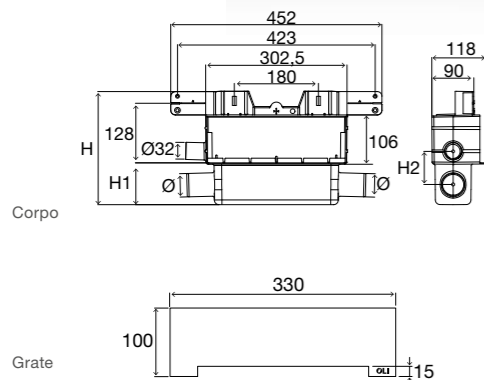

OLIFILO X-WALL



IDEAL FOR PEOPLE WITH REDUCED MOBILITY

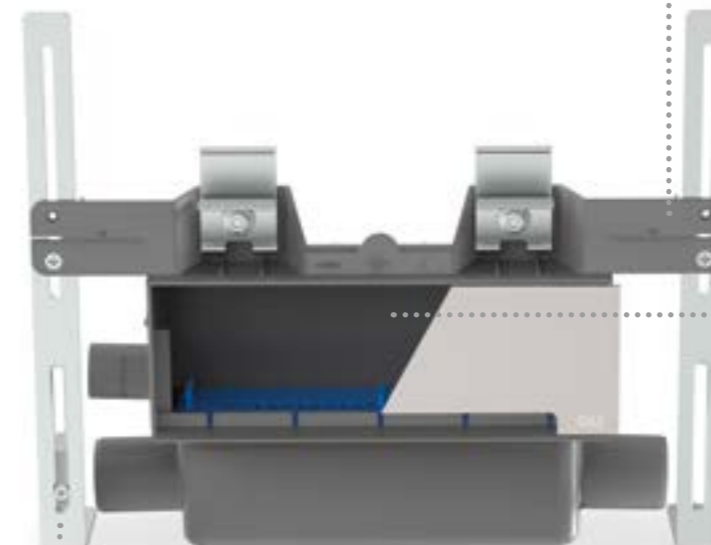

ABS SIPHON
For better adhesion to the pre-mounted waterproof membrane.

RANGE
Ideal for confined spaces.

REGULATION
Includes feet that allow the system to be adjusted



BRUSHED

INSTALLATION EXAMPLE



Drywall application



Technical rail application

BALANCE




BALANCE



GENERAL FEATURES

- Extra-flat shower tray - easy access;
- Texture: Stone;
- Class 3, slip-resistant;
- Exterior coating in high-resistance sanitary gel coat;
- Inner mineral load and colored resin mass;
- Color: White (RAL9003) and Black (RAL9005);
- Stainless steel grate AISI 304;
- Grate size: 132x132mm;
- Valve for Ø90 shower tray (42 L/min);
- Can be cut to size*;
- CE marking.

*Cut for intermediate dimensions: 24€
For intermediate dimensions, the price is based on the higher measurement.

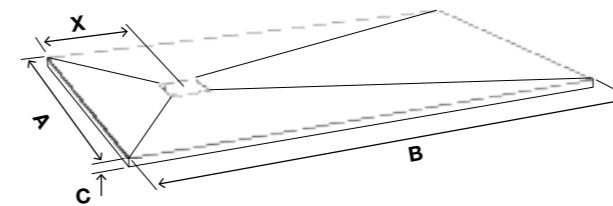








HOW TO GET THE REFERENCE FOR YOUR SHOWER TRAY:

In the 'COD' column, the letter Y should be replaced with the number 1 when the finish is white, and with the number 2 when the finish is black.

A	B	C	X	COD	A	B	C	X	COD
700	900	24-26	300	OB2001007090 Y	900	900	24-26	450	OB2001009090 Y
	1000		300	OB2001070100 Y		1000		300	OB2001090100 Y
	1200		350	OB2001070120 Y		1200		350	OB2001090120 Y
	1400		400	OB2001070140 Y		1400		400	OB2001090140 Y
	1500		400	OB2001070150 Y		1500		400	OB2001090150 Y
	1600		450	OB2001070160 Y		1600		450	OB2001090160 Y
	1700		450	OB2001070170 Y		1700		450	OB2001090170 Y
	1800		500	OB2001070180 Y		1800		500	OB2001090180 Y
	2000		500	OB2001070200 Y		2000		500	O20010902000 Y
	2200		600	OB2001070220 Y		2200		600	O20010090220 Y
800	800	24-26	400	OB2001008080 Y					
	1000		300	OB2001080100 Y					
	1200		350	OB2001080120 Y					
	1400		400	OB2001080140 Y					
	1500		400	OB2001080150 Y					
	1600		450	OB2001080160 Y					
	1700		450	OB2001080170 Y					
	1800		500	OB2001080180 Y					
	2000		500	OB2001080200 Y					
	2200		600	OB2001080220 Y					



PART NUMBER GUIDE

		550	650	750	600	700	800	900	1000
	W	OB30000041055	OB30000041065	OB30000041075	-	-	-	-	-
	B	OB30000045076	OB30000045077	OB30000045078	-	-	-	-	-
		OB30000045055	OB30000045065	OB30000045075	-	-	-	-	-
	W	-	-	-	OB30000041830	OB30000041831	OB30000041832	-	-
	B	-	-	-	OB30000051830	OB30000051831	OB30000051832	-	-
	G	-	-	-	OB30000061830	OB30000061831	OB30000061832	-	-
		-	-	-	OB30000045830	OB30000045831	OB30000045832	-	-
	W	-	-	-	-	-	-	-	OB30000023804
	B	-	-	-	-	-	-	-	OB30000053804
		-	-	-	-	OB3000000201	-	-	-
		-	-	-	-	OB2001007090	Y OB2001008080	Y OB2001009090	Y -
		-	-	-	-	OB2001070100	Y OB2001080100	Y OB2001090100	Y -
		-	-	-	-	OB2001070120	Y OB2001080120	Y OB2001090120	Y -
		-	-	-	-	OB2001070140	Y OB2001080140	Y OB2001090140	Y -
		-	-	-	-	OB2001070150	Y OB2001080150	Y OB2001090150	Y -
		-	-	-	-	OB2001070160	Y OB2001080160	Y OB2001090160	Y -
		-	-	-	-	OB2001070170	Y OB2001080170	Y OB2001090170	Y -
		-	-	-	-	OB2001070180	Y OB2001080180	Y OB2001090180	Y -
		-	-	-	-	OB2001070200	Y OB2001080200	Y OB2001090200	Y -
		-	-	-	-	OB2001070220	Y OB2001080220	Y OB2001090220	Y -

*In the 'COD' column, the letter Y should be replaced with the number 1 when the finish is white, and with the number 2 when the finish is black.

WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
150x100x1030	3	-	-	-	40	1.2	0.8	1.1	129
150x100x1030	3	-	-	-	40	1.2	0.8	1.1	129
105x155x1300	3.1	-	-	-	40	1.2	1	1.2	133
105x155x1300	3.2	-	-	-	40	1.2	1	1.2	137
105x155x1300	2.7	-	-	-	40	1.2	1	1.2	117
475x265x155	1.5	-	-	-	98	1.2	0.8	2.4	158
-	26	1	-	26	16	1.2	0.8	-	436
-	29	1	-	29	16	1.2	0.8	-	484
-	45	1	-	45	16	1.2	0.8	-	740
-	53	1	-	53	16	1.2	0.8	-	868
-	50	1	-	50	16	1.2	0.8	-	820
-	60	1	-	60	16	1.2	0.8	-	980
-	64	1	-	64	16	1.2	0.8	-	1044
-	68	1	-	68	16	1.2	0.8	-	1108
-	76	1	-	76	16	1.2	0.8	-	1236
-	83	1	-	83	16	1.2	0.8	-	1348



SUSTAINABLE PRODUCT

Electric radiators, due to their flexibility in achieving maximum comfort and doing so rigorously at the required times, can be considered an EFFICIENT PRODUCT THAT CONTRIBUTES TO RESPONSIBLE ENERGY CONSUMPTION.

ECOOL ELECTRIC TOWEL RADIATOR 254








OLICLIMA ELECTRIC TOWEL RADIATOR NEW

White/Polished Chrome/Black

GENERAL FEATURES

- Digital thermostat with class I insulation;
- IP44 degree of protection;
- Power supply: 230 V ~50Hz;
- Temperature regulation range: 7 to 30°C;
- Supplied in White RAL 9010, Chrome and Black;
- Material: Steel;
- Weekly daily programme;
- Boost function;
- Working mode: Comfort, Eco and Anti-frost;
- Includes wall fixing kit and 1m power cable.

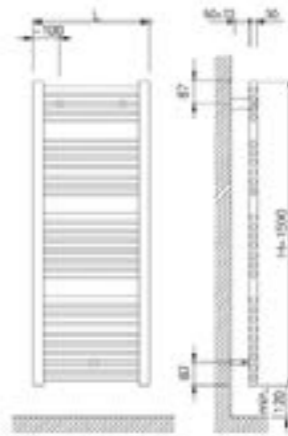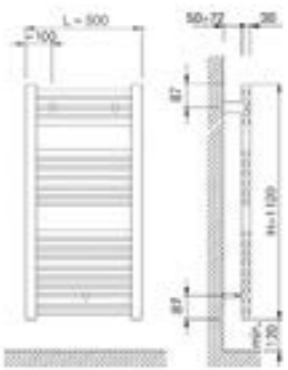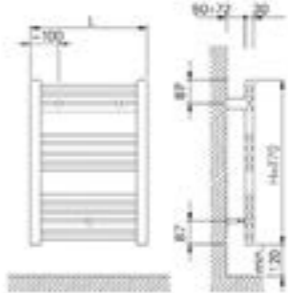

- cod. **KC20000552548** 803X500 White
- cod. **KC20000552549** 1110X500 White
- cod. **KC20000552550** 1420X500 White
- cod. **KC20000552551** 803X500 Chrome
- cod. **KC20000552552** 1110X500 Chrome
- cod. **KC20000552553** 1420X500 Chrome
- cod. **KC20000552554** 803X500 Black
- cod. **KC20000552555** 1110X500 Black
- cod. **KC20000552556** 1420X500 Black



Programmable
DIGITAL CHRONOTERMOSTAT



BACKLIGHTING
Easy to visualise the menu












POWER CABLE
matching the colour of the radiator






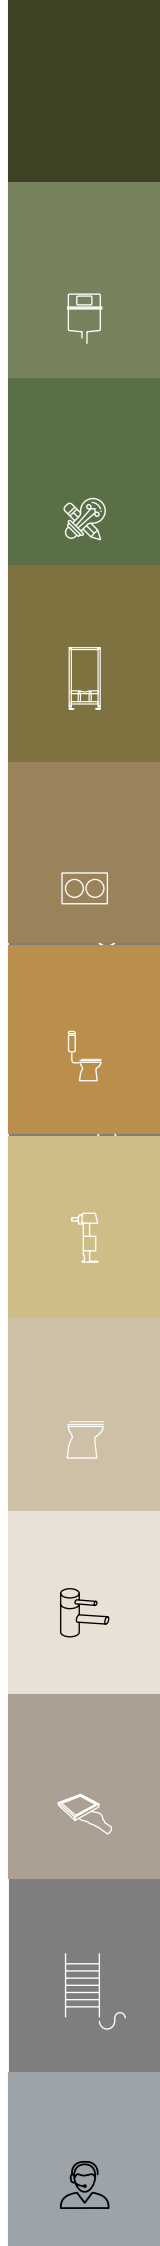
MOUNTING BRACKETS
in the same colour as the radiator

Colour/Finish	Height (mm)	Width W (mm)	Between axes C (mm)	Weight (kg)	Number of pipes	Thermal power
White and Black	803	500	450	8.2	13	400
	1110	500	450	12.4	22	700
	1420	500	450	17.4	28	850
Polished Chrome	803	500	450	8.2	13	300
	1110	500	450	12.4	22	400
	1420	500	450	17.4	28	500

PART NUMBER GUIDE

		803	1110	1420
	White	KC20000552548		
	Chrome	KC20000552551		
	Black	KC20000552554		
	White		KC20000552549	
	Chrome		KC20000552552	
	Black		KC20000552555	
	White			KC20000552550
	Chrome			KC20000552553
	Black			KC20000552556

 WxDxH	Weight	Qt.	 Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	 Pallet Width	Pallet Length	Weight
879x550x90	10	-	-	-	-	-	-	-	-
879x550x90	10	-	-	-	-	-	-	-	-
879x550x90	10	-	-	-	-	-	-	-	-
1183x550x90	14.5	-	-	-	-	-	-	-	-
1183x550x90	14.5	-	-	-	-	-	-	-	-
1183x550x90	14.5	-	-	-	-	-	-	-	-
1493x550x90	18	-	-	-	-	-	-	-	-
1493x550x90	18	-	-	-	-	-	-	-	-
1493x550x90	18	-	-	-	-	-	-	-	-



Blank page with horizontal dotted lines for writing.

Blank page with horizontal dotted lines for writing.



CUSTOMER SUPPORT

ALWAYS CONTACT OLI SUPPORT THROUGH PHONE OR E-MAIL

OLI provides phone contact +351 234 300 200 and email export@oli-world.com to provide a close accompaniment throughout the year for every project.

OLI ON SOCIAL MEDIA

FOLLOW ALL OLI UPDATES AND NEWS



BIM

OLI IS COMMITTED TO BE AT THE FOREFRONT OF DEVELOPMENT IN THE CONSTRUCTION SECTOR.

BIM is the new standard of construction and facilitates the transfer of information between stakeholders and enables integrated management throughout the product life cycle. www.oli-world.com/en/services-/bim-objects/



OLI TECH

OLI TECH WAS DEVELOPED FOR SMARTPHONE AND TABLET TO PROVIDE DIRECT ACCESS TO USEFUL INFORMATION FOR PROFESSIONALS.

Get quick access to technical data sheets, assembly instructions, maintenance videos and products characteristics that OLI offers to market.

Download OLI TECH through the QR-CODES and give feedback to: communication@oli-world.com



GENERAL SALES CONDITIONS

The General Sales Conditions in force regulate all commercial transactions between OLI Sistemas Sanitários, S.A. and the customer and apply to all orders, deliveries, payments, returns and guarantees concerning goods, equipment, materials and services provided by OLI Sistemas Sanitários, S.A. the detailed document is available for consultation on the official website of OLI Sistemas Sanitários, S.A.

<https://www.oli-world.com/en/general-sales-conditions-/>



OLI – Sistemas Sanitários, S.A. reserves the right to make changes to the products in this catalogue without notice. Product images are for illustrative purposes only and may differ from the actual product. For more information, please visit www.oli-world.com.



OLI-Sistemas Sanitários, S.A.
Travessa do Milão, 11, Esgueira
3800-314 Aveiro, Portugal

T (+351) 234 300 200
F (+351) 234 300 212
www.oli-world.com
export@oli-world.com

C.0050.08-03.2025
ZB03000000077

Inspired by water...