


Technical Sheet

OLI80 Sanitarblock

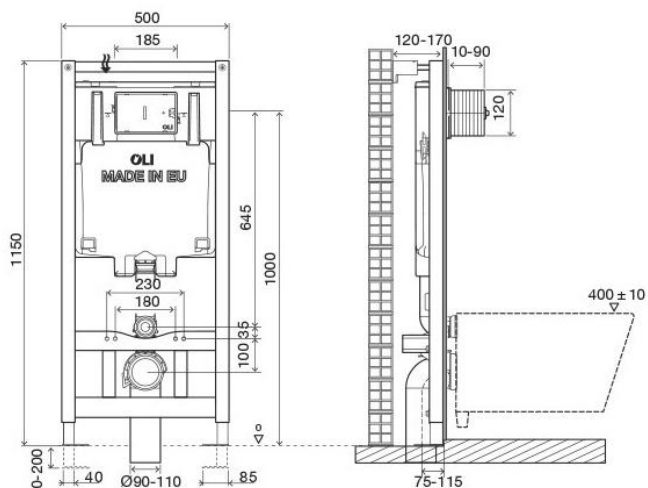

Product Identification

885111

- OLI80 Mechanic Sanitarblock

Definition and Application

- Preassembled structure for installation in front of masonry wall and finish in light wall, plasterboard wall and technical support rail for light wall
- Compatible with wall hung toilets up to 660mm long.

Technical Features

Structure

- Painted frame with 1,5mm thickness, corrosion resistant
- Easy and quick installation with Fast Fit system
- Minimum thickness of 120mm and adjustable up to 170mm
- Height regulation of the adjustable floor brackets (0-200 mm);
- Depth adjustable outlet bend
- One man assembly
- Frame tested for 400kg load

Millimetres measures

FTC.1635.00
Technical Sheet

www.oli-world.com
comercial@oli-world.com
export@oli-world.com

Cistern

- Dual flush of 6/3 in-wall cistern compatible with either dual or single flush actuators
- Adjustable flush volumes to 4.5/3L
- 80mm thickness
- Mechanic actuation
- Working pressure from 0,1 to 16 bar
- Resistance to atmospheric humidity (Hr <90%).
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress
- Other versions compliant with: BELGAQUA standard
- EN 14055 marking CE marking
- Equipped with Nano inlet valve
- Supplied with anti-condensation lining

Accessories

- 1 Discharge pipe \varnothing 90 x 360
- 1 Seal for discharge pipe \varnothing 125
- 1 Connecting pipe \varnothing 45 x 180
- 1 Pan rubber seal \varnothing 45
- 1 Protective box
- 1 G $\frac{1}{2}$ " stop valve
- 1 Protection sponge for the stop valve
- 1 Outlet bend \varnothing 90 / 90 L230
- 1 Adaptor \varnothing 90/110
- 1 Protection pipe \varnothing 90
- 1 Protection pipe \varnothing 45

Fixing accessories for wall structure:

- 4 Galvanized screws M8x60
- 4 Galvanized washers M8 DIN 9021
- 4 Bushing for metal structure
- 2 Fast Fit fixing

For fixing hung wc on the structure:

- 2 Threaded rods M12
- 2 Nuts M12
- 2 Protection for threaded rod
- 2 Protection cover
- 2 Toilet centring washer
- 2 Washers Zn \varnothing 34

Warranty

- Ten (10) years warranty according to the general selling terms, starting from the purchase date of the product.
- If the product is not correctly installed the warranty is not valid

Observations

- There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site www.oli-world.com