


# Technical Sheet

OLI74 Nano Plus Mechanic Simflex

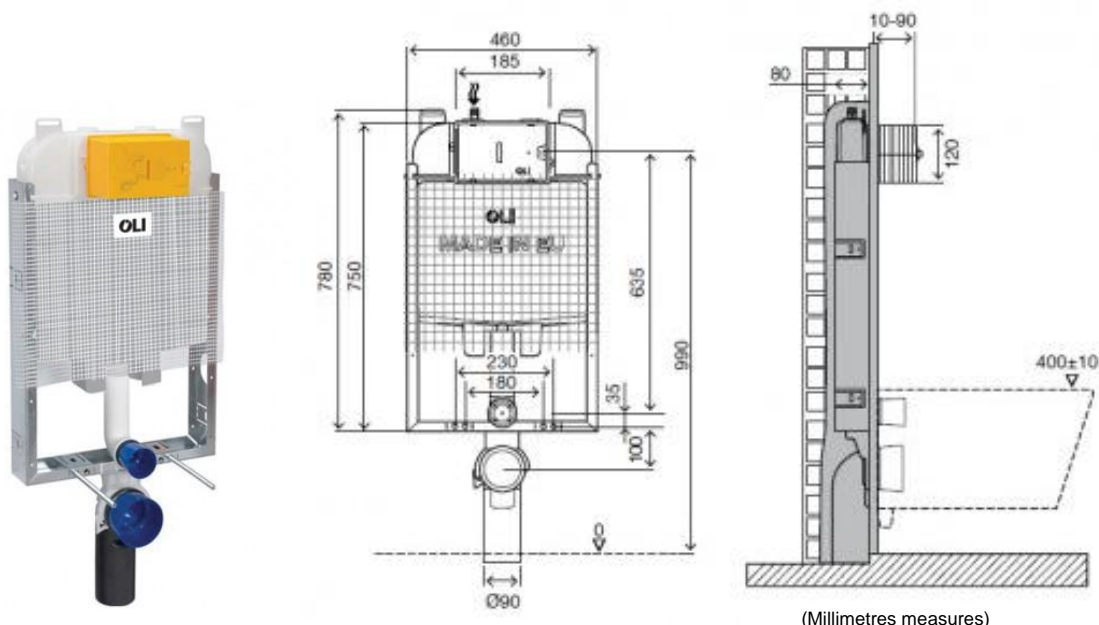

## Product Identification

885069

- OLI74 Nano Plus Mechanic Simflex

## Definition and Application

- Preassembled structure for setting in masonry walls, to installation of wall-hung sanitary appliances.

## Technical Features

### Structure

- Metal, galvanized, corrosion resistant

### Cistern

- Dual flush of 6/3 litres (adjustable to 4/2 liters)
- Mechanic actuation
- Working pressure from 0,5 to 10 bar
- Resistance to atmospheric humidity (Hr <90%).
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress
- CE EN 14055 marking CL1
- Equipped with Nano Plus Inlet Valve, with delayed refilling (saves up to 9 litres of water per day) and silent according to the NF standard category Class I
- Supplied with anti-condensation lining
- "A" class for the Water Efficiency in compliance with the ANQIP Authority requirements

## Accessories

- 1 Flush pipe  $\varnothing$  90 x 250
- 1 Seal for flush pipe  $\varnothing$  125
- 1 Connecting pipe  $\varnothing$  45 x 180
- 1 Pan rubber seal  $\varnothing$  45
- 1 Protective box
- 1 G 1/2" stop valve
- 1 Protection sponge for the stop valve
- 1 Outlet bend  $\varnothing$  90 / 90 L340
- 1 Protection pipe  $\varnothing$ 90
- 1 Protection pipe  $\varnothing$ 45

### Fixing accessories for wall structure:

- 4 Galvanized screws M8x60
- 4 Galvanized washers M8 DIN 9021
- 4 Bushing for metal structure
- 2 Fast Fit fixing

### Fixing accessories for toilet bowl mounting on the structure:

- 2 Threaded rods M12
- 2 Protection for threaded rod
- 2 Protection cover
- 2 Toilet centring washer
- 2 Nuts M12
- 2 Washers  $\varnothing$  34

## Warranty

- For the terms of warranty please visit [www.oli-world.com](http://www.oli-world.com)

## Observations

- There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site [www.oli-world.com](http://www.oli-world.com)