


# Technical Sheet

Expert PLUS

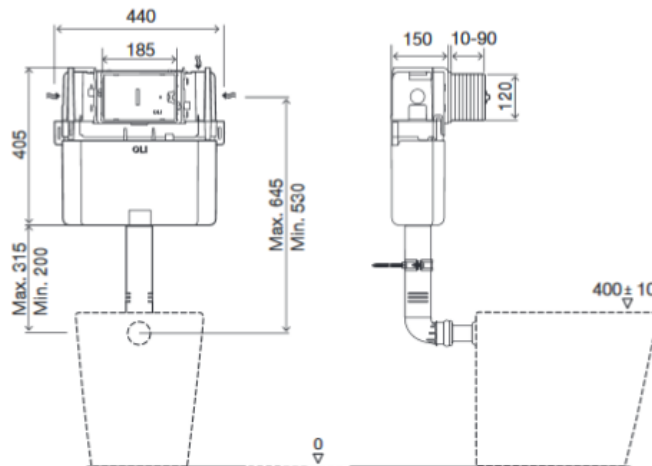

(dimensions in millimeters)

## Product Identification

721003

- Expert Plus Mechanic

## Definition and Application

- Flush cistern to be installed inside the wall and used in combination with floor standing sanitary applications.
- Top or front activation/access

## Technical Features

- Dual flush in-wall cistern compatible with dual flush actuators 6/3 litres (adjustable to 4/2 and 7/3)
- Mechanic actuation
- 150mm thickness
- Working pressure from 0,1 to 16 bar
- Resistance to atmospheric humidity (Hr <90%).
- Polypropylene cistern highly resistable and inalterable to thermal stress
- Lower/under bench installation possibility
- Other versions compliant with: WRAS/SAI-WATWERMARK/SINTEF/NF/BELGAQUA standards
- EN 14055 marking CL1
- Equipped with Azor Plus Inlet Valve, with delayed refilling (saves up to 9 litres of water per day) and silent according to the NF standard category Class I
- Supplied with anti-condensation lining
- "A" class for the Water Efficiency in compliance with the ANQIP Authority requirements

Millimetres measures

## Accessories

- 1 Discharge pipe 315mm
- 1 Seal for discharge pipe ø 45
- 1 Protective box
- 1 G ½" stop valve
- 1 Protection sponge for the stop valve
- 1 Protection pipe ø 45

## Warranty

- Ten (10) years warranty according to the general selling terms, starting from the purchase date of the product.
- If the product is not correctly installed the warranty is not valid

## Observations

There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site [www.oli-world.com](http://www.oli-world.com)