
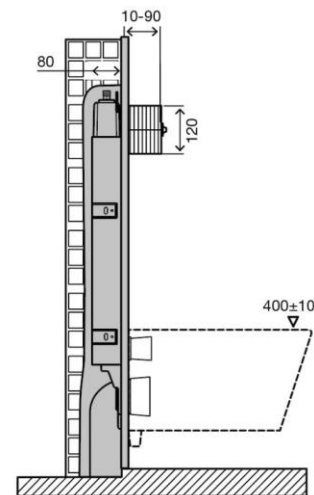


Technical Sheet

OLI74 PLUS

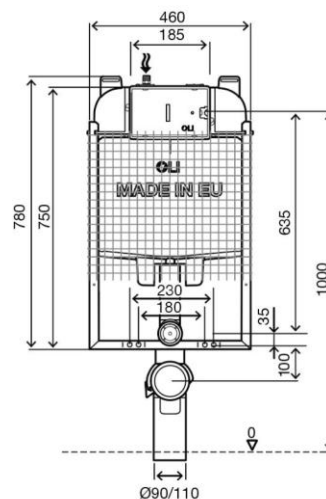

Product Identification

002332

- OLI74 PLUS Pneumatic Simflex

Definition and Application

- Preassembled structure for setting in masonry walls, to installation of wall-hung sanitary appliances.
- Compatible with all wall-hung WC pans

Technical Features

Structure

- Metal, galvanized, corrosion resistant

Cistern

- Dual flush in-wall cistern compatible with either dual or single flush actuators 6/3 litres
- Pneumatic actuation
- 80mm thickness
- Working pressure from 0,1 to 16 bar
- Resistance to atmospheric humidity (Hr <90%).
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress
- Other versions compliant with WRAS/NF/SAI-WATERMARK/UPC/KIWA standards
- EN 14055 marking CL1
- Equipped with Azor Plus Inlet Valve, with delayed refilling (saves up to 9 litres of water per day) and silent according to the NF standard category Class I
- Supplied with anti-condensation lining
- "A" class for the Water Efficiency in compliance with the ANQIP Authority requirements
- Possibility to put pneumatic actuation 2,5 meters from the cistern

Millimetros measures

Accessories

- 1 Discharge pipe \varnothing 90 x 250
- 1 Seal for discharge pipe \varnothing 125
- 1 Connecting pipe \varnothing 45 x 180
- 1 Pan rubber seal \varnothing 45
- 1 Protective box
- 1 G 1/2" stop valve
- 1 Protection sponge for the stop valve
- 1 Flush bend \varnothing 90 / 90 L230
- 1 Protection pipe \varnothing 90
- 1 Protection pipe \varnothing 45

Fixing accessories for wall structure:

- 4 Galvanized screws M8x60
- 4 Galvanized washers M8 DIN 9021
- 4 Bushing for metal structure
- 2 Fast Fit fixing
-

Fixing accessories for hung wc mounting on the structure:

- 2 Threaded rods M12
- 2 Nuts M12
- 2 Protection for threaded rod
- 2 Protection cover
- 2 Toilet centring washer
- 2 Washers Zn \varnothing 34

Warranty

- Ten (10) years warranty according to the general selling terms, starting from the purchase date of the product.
- If the product is not correctly installed the warranty is not valid

Observations

- Pay attention to the various pneumatic control plates, as they may not be compatible with all wall thicknesses. See compatibility table in catalogue.
- There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site www.oli-world.com